


Lego 71043

Harry Potter Hogwarts Castle

Installation Guide



Caution: please open the packages one by one

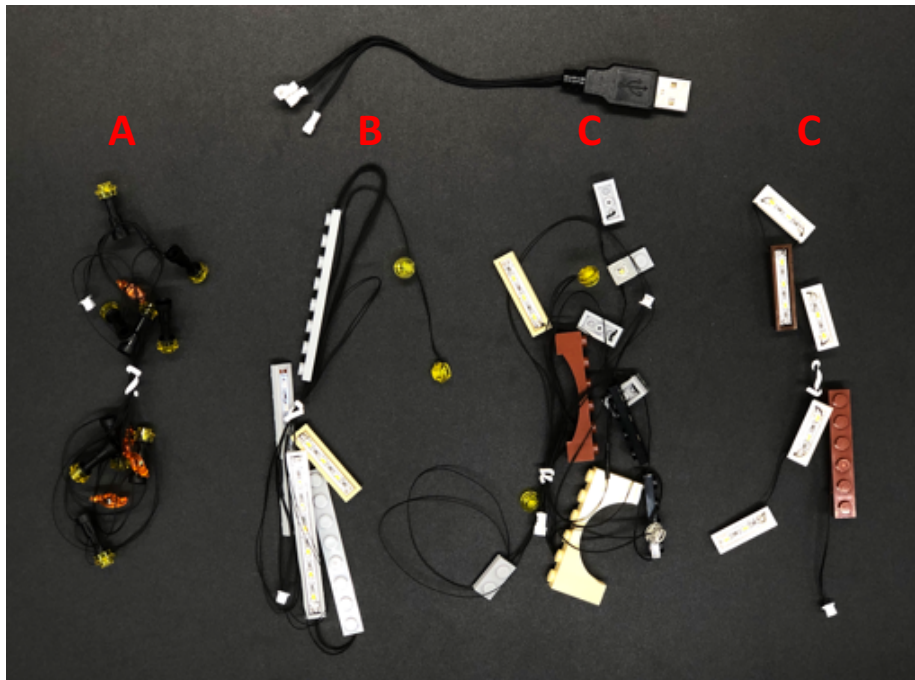

A,B,C would be for this side



For Part A, first of all remove these parts and take the yellow round plates away



Put Part A lighting parts on with the yellow round plates remove from previous step



Switch the fire lighting parts on the candle, before that you should remove the brown parts as below to free some space for wire




Put the brown parts back to it and beware of breaking the wires






Part B, first of all we need to remove these parts away

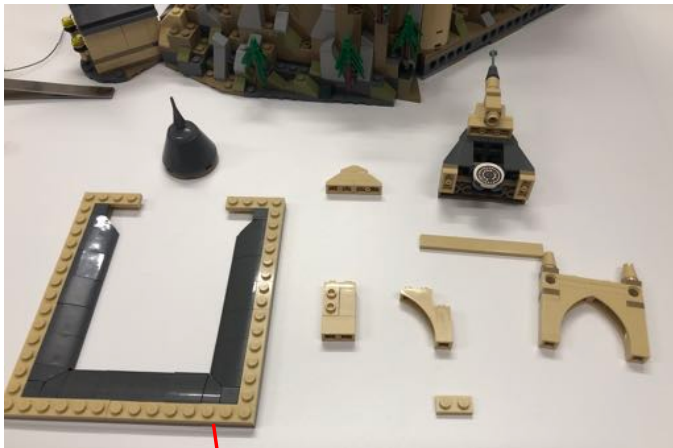


Reverse this and put the lights on as shown

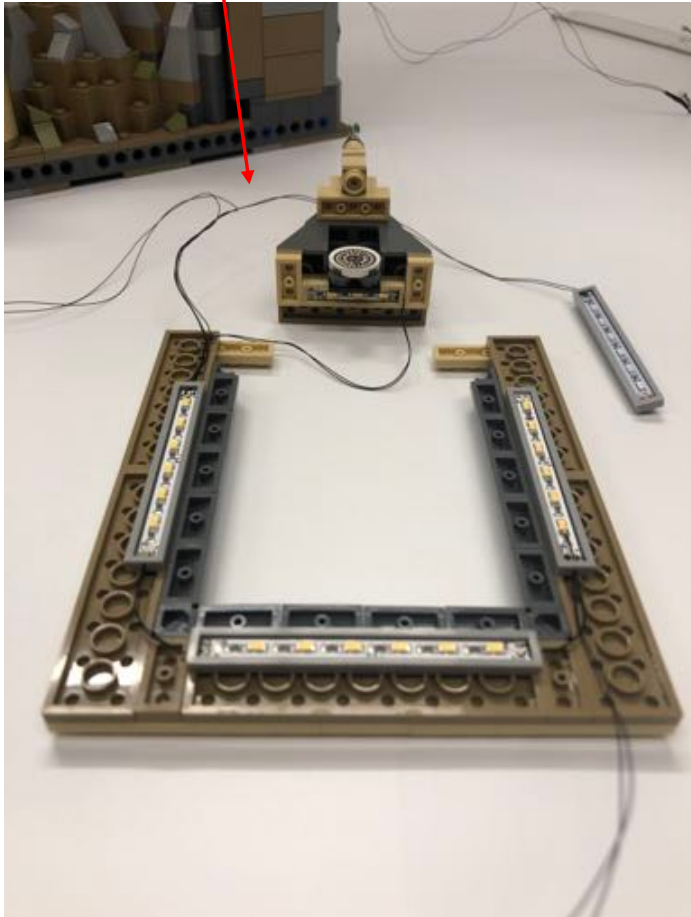


Put the parts back and put parts with 2 yellow round plates out to the downhill
*Take those 2 bricks at the corner out to make the wires can pass through easier



Remove the parts, put the lights on, and put everything back

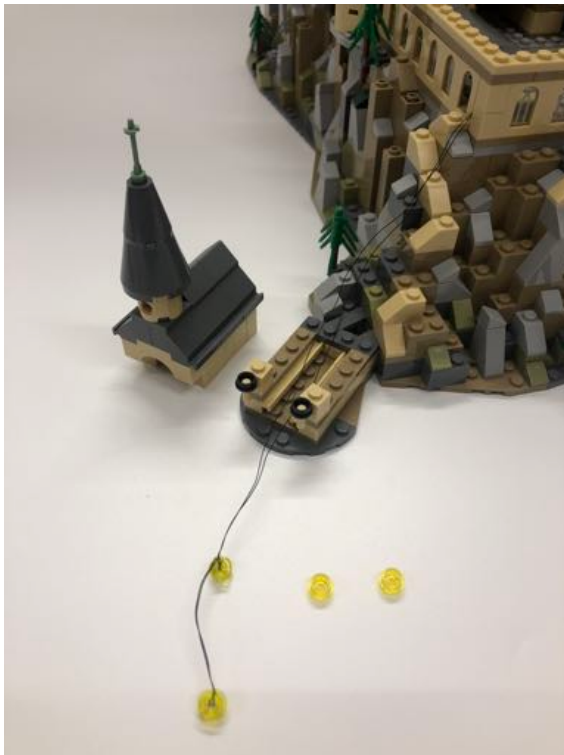

For the remain 1x8 parts and the connector, pass them through the gap and install
The 1x8 as shown below

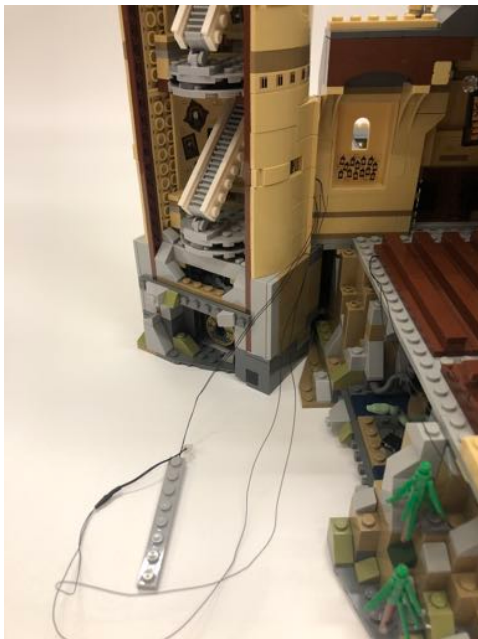

Before installing part C, take these parts away first



Put the 1x2 in here as shown in the red circle



Install the black 1x4 parts on top of the stairs



For the top, remove the 1x2's and take the clear tiles and white slope away



Put the removed part one the 1x2's lighting parts and install them as shown




Replace the light part to the brown arch



Separate the parts like below



Separate the parts like below

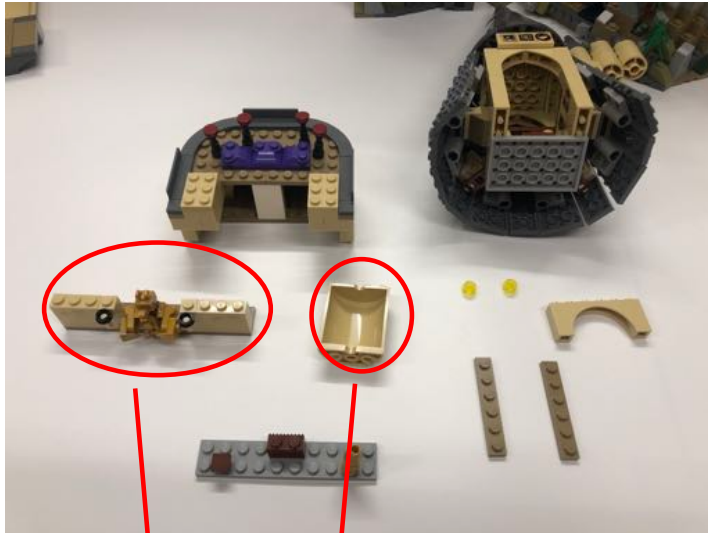


Put the longer part on the tower, put the round plate lighting parts on and put the cylinder



Then put the arch on it, beware of the wires



Now put the main body on top, arrange the wires and put the clear round plate on

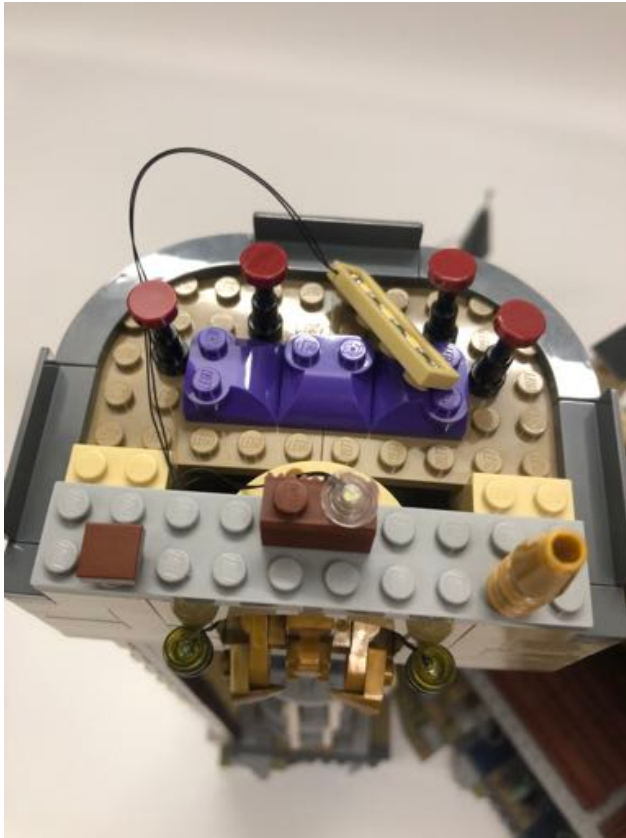

Put the top on the tower, and install the 1x4



Now it's remove the parts from the circle below




Put the lighting parts on and put the 1x8 brick back on afterwards



This is where the white lighting parts should put on




Connect the connectors, hide the wires inside the hole shown in the red circle

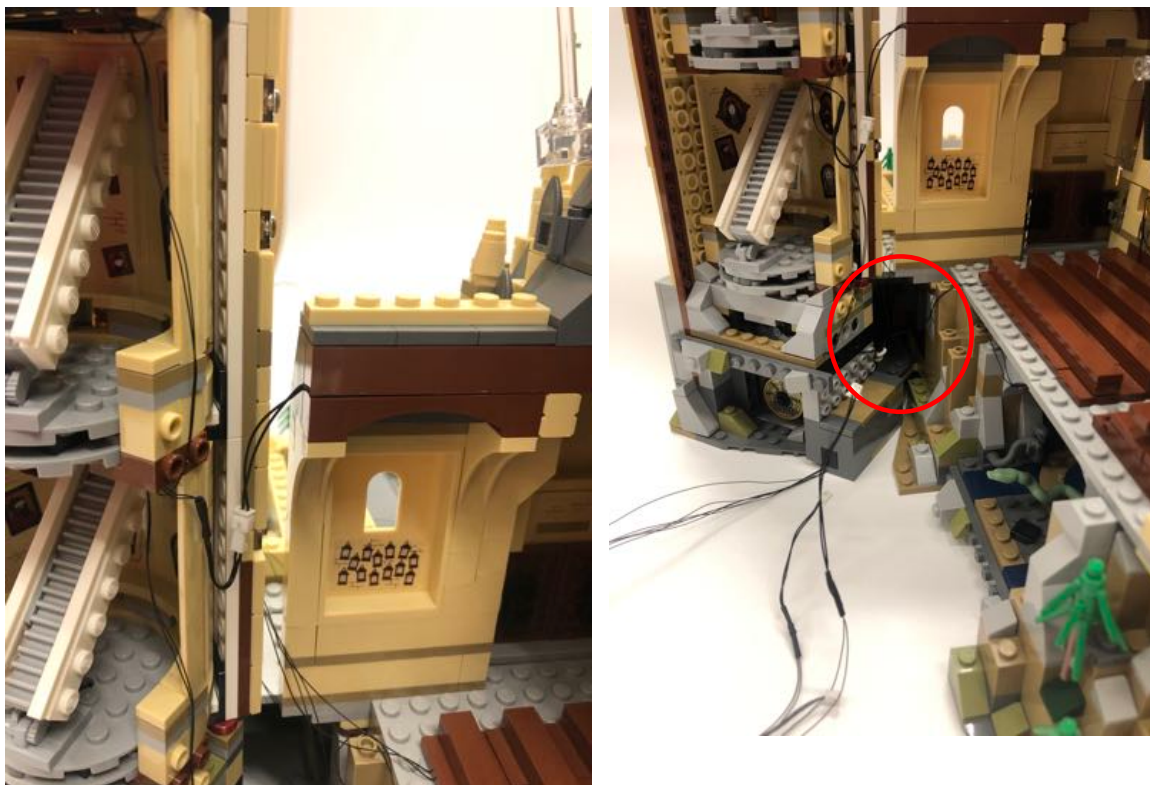

After that, put the wall back to tower and this part is finished




Caution: please open the packages one by one

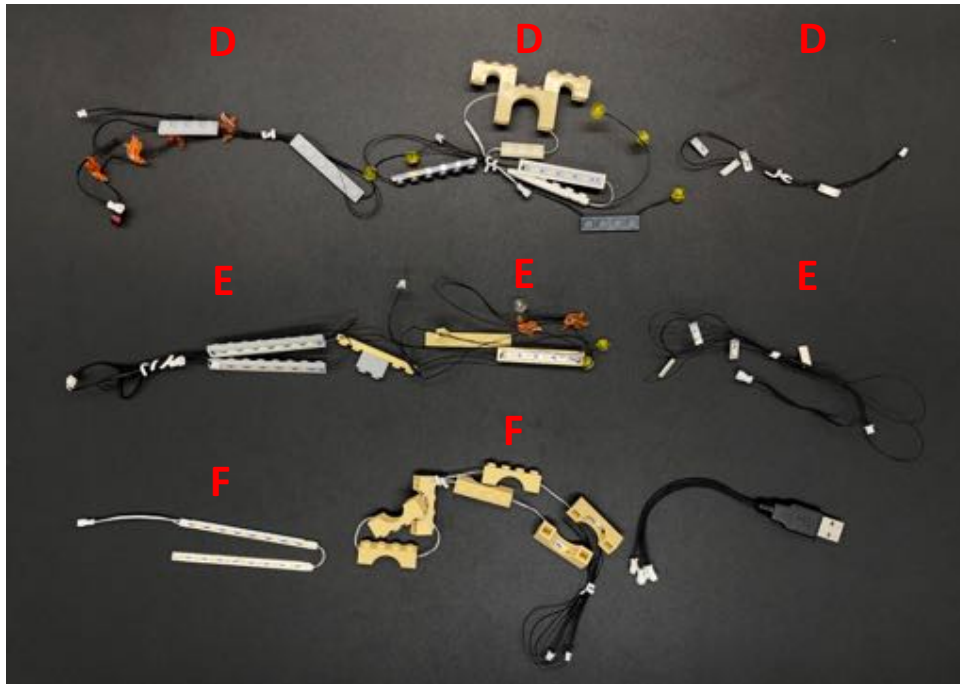

D,E,F would be for this side



For Part D, first of all remove these parts from the candles

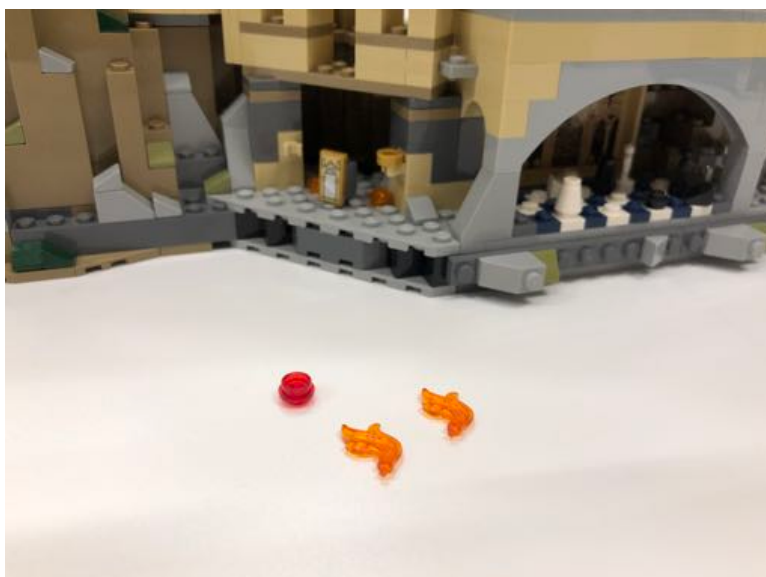

Replace with the lighting parts




Install the bars on the right hand side of the candles



For above the candles, remove these parts away to replace the lighting parts
And put them back afterwards



Pull the whole set of wire through the hall way and remove all the yellow round plates

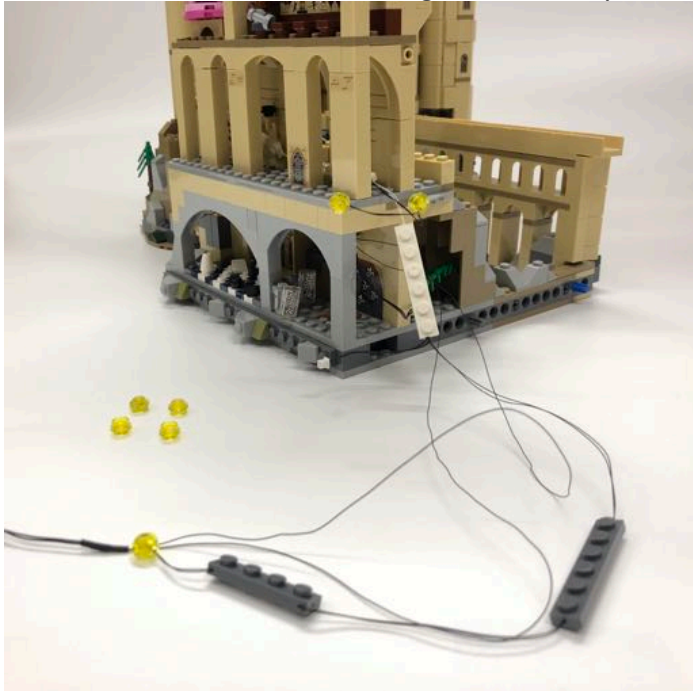

Set the white bars on the ceiling



Set up the yellow round plates, make sure there's no wire across the door



Remove the top of this part to install the lighting parts then put them back



Connect the wires with part D which contains the flame parts



Remove the parts like below



There're 4 lights sticked with double-sided tapes, remove the non sticky side and put them inside the windows (the end sided part of the wire will put into the window with red arrow then to the yellow window)



Looks like this after installation




Put the removed parts back to the position and connect the wire



For Part E, remove the bricks and plate away from the model to put the lighting parts in (has to be really careful when you remove the parts to prevent break down of the model)



Need to follow the directions as below because of the connector plugs, from left to right
Is male-female-male-female

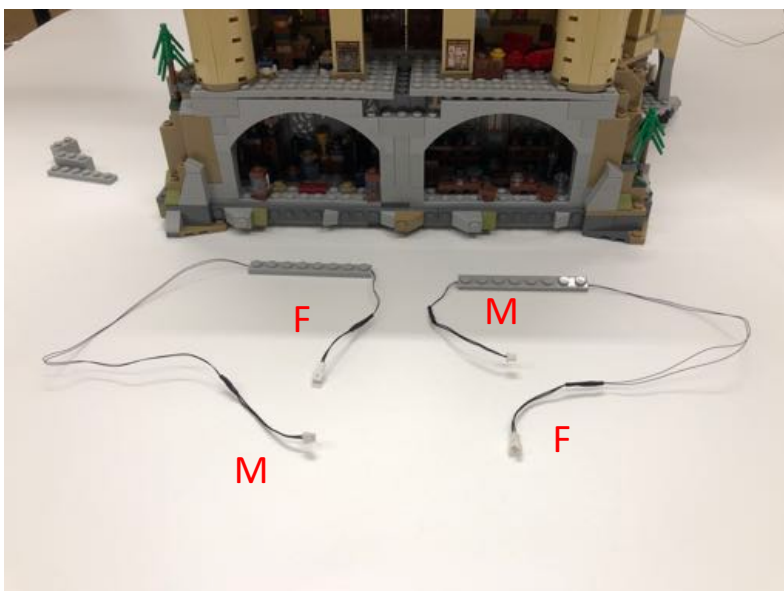

Install the bar on the left side first and pull the connector to the other side



Connect with the bar at right and put on the ceiling



Take these parts away in purpose to hide the wire properly



Left side



Right side

Nows it's for part E with flame, take the parts away from the fireplace, the door and the 1x2 on top of the doors




Install the bars on the ceiling



Install the the fires and the clear round plate



Install the yellow round plates then put the door back on it

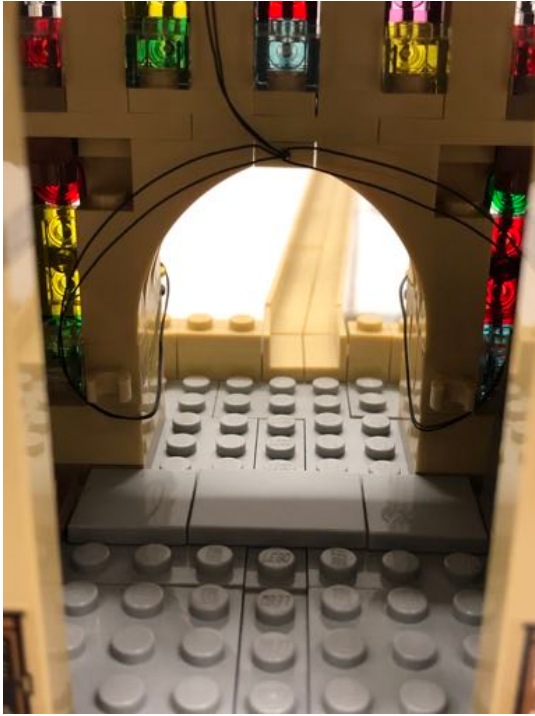

Remove the plates as shown to put the wire connet with the connector underneath, Restore the plates and connect with the “right hand side” connector on page 19



Remove the parts as shown for the windows lights





The steps are same as the window lights before and beware of the direction because you need to connect with the wire below, follow the order as shown by the red letters
After that put the parts back and watch out don't let the parts break the wires





Male plug

Female plug


For Part F, remove the bridge and separate these parts first

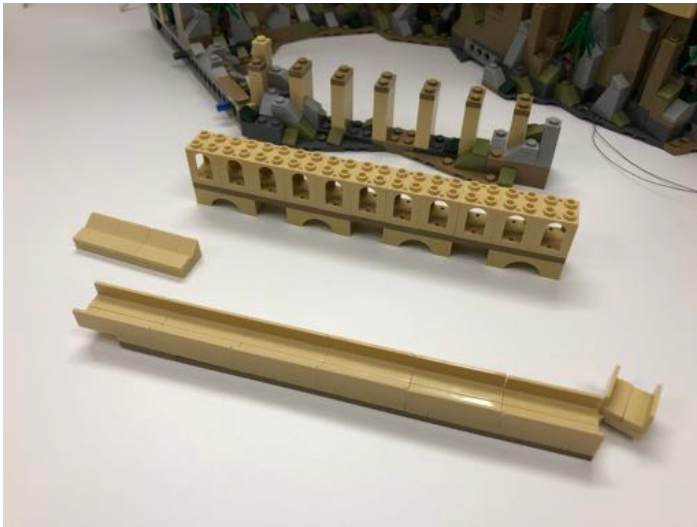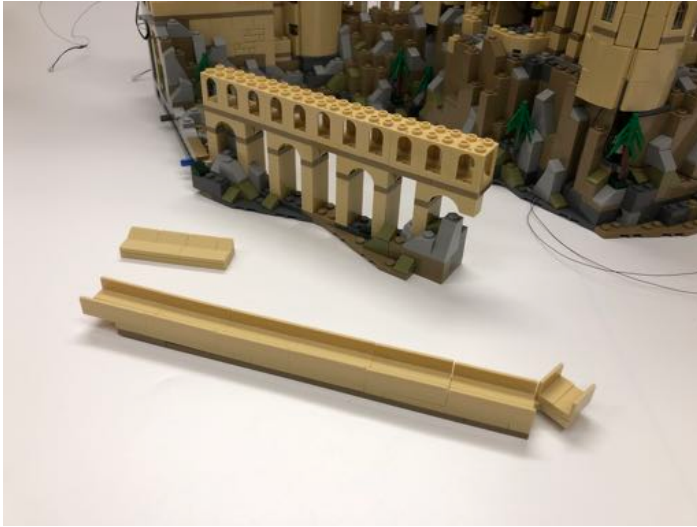


Remove the blue tapes and stick on the top like this

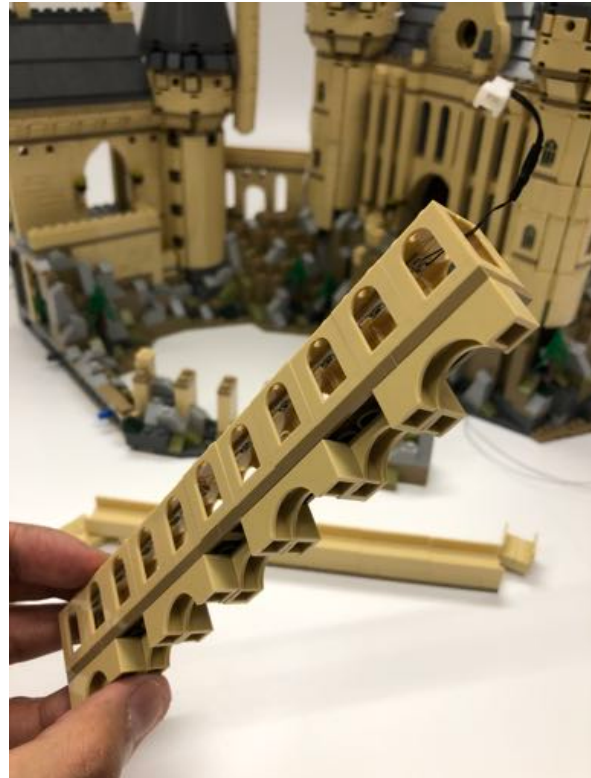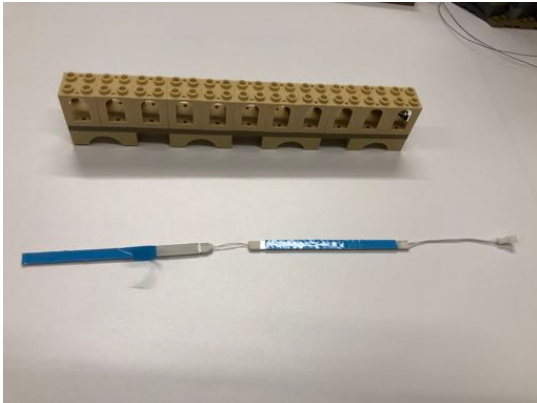

Take the arches away from the bridge, replace with the lighting parts and connect together

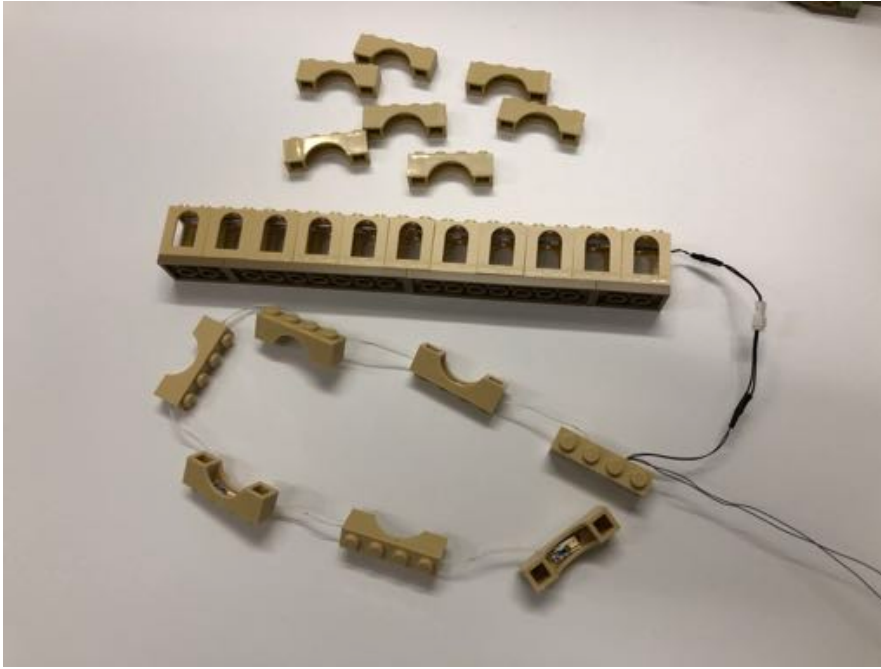

Assemble the bridge, restore it back to the position and set connector out nicely

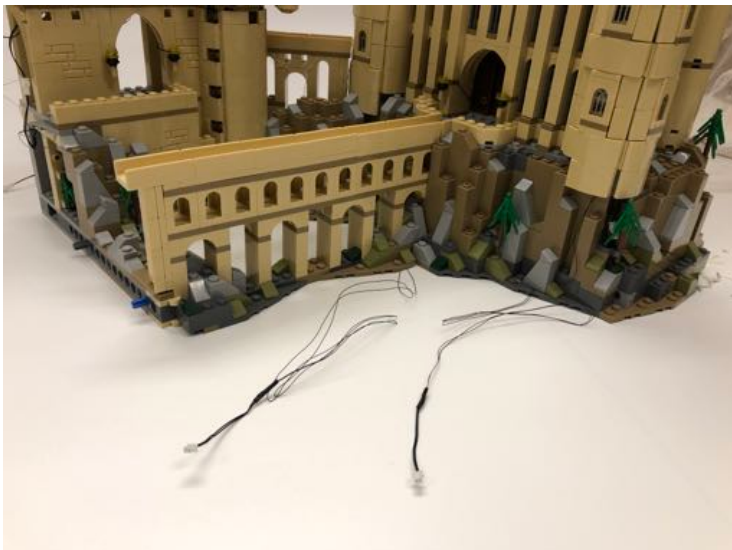

Connect all the plugs to the USB, then you can light it on~

*Depends on which side you wanna display the model, you can choose where you put the USB plugs to make them unseen, but watch out the model when you're moving the wires

