


Remove the parts as shown above.




Move the 1x8 plates forward by 2 studs. You can leave the gap at the bottom empty or use a couple of 1x2 plates to fill. Put the parts you removed earlier back in place.

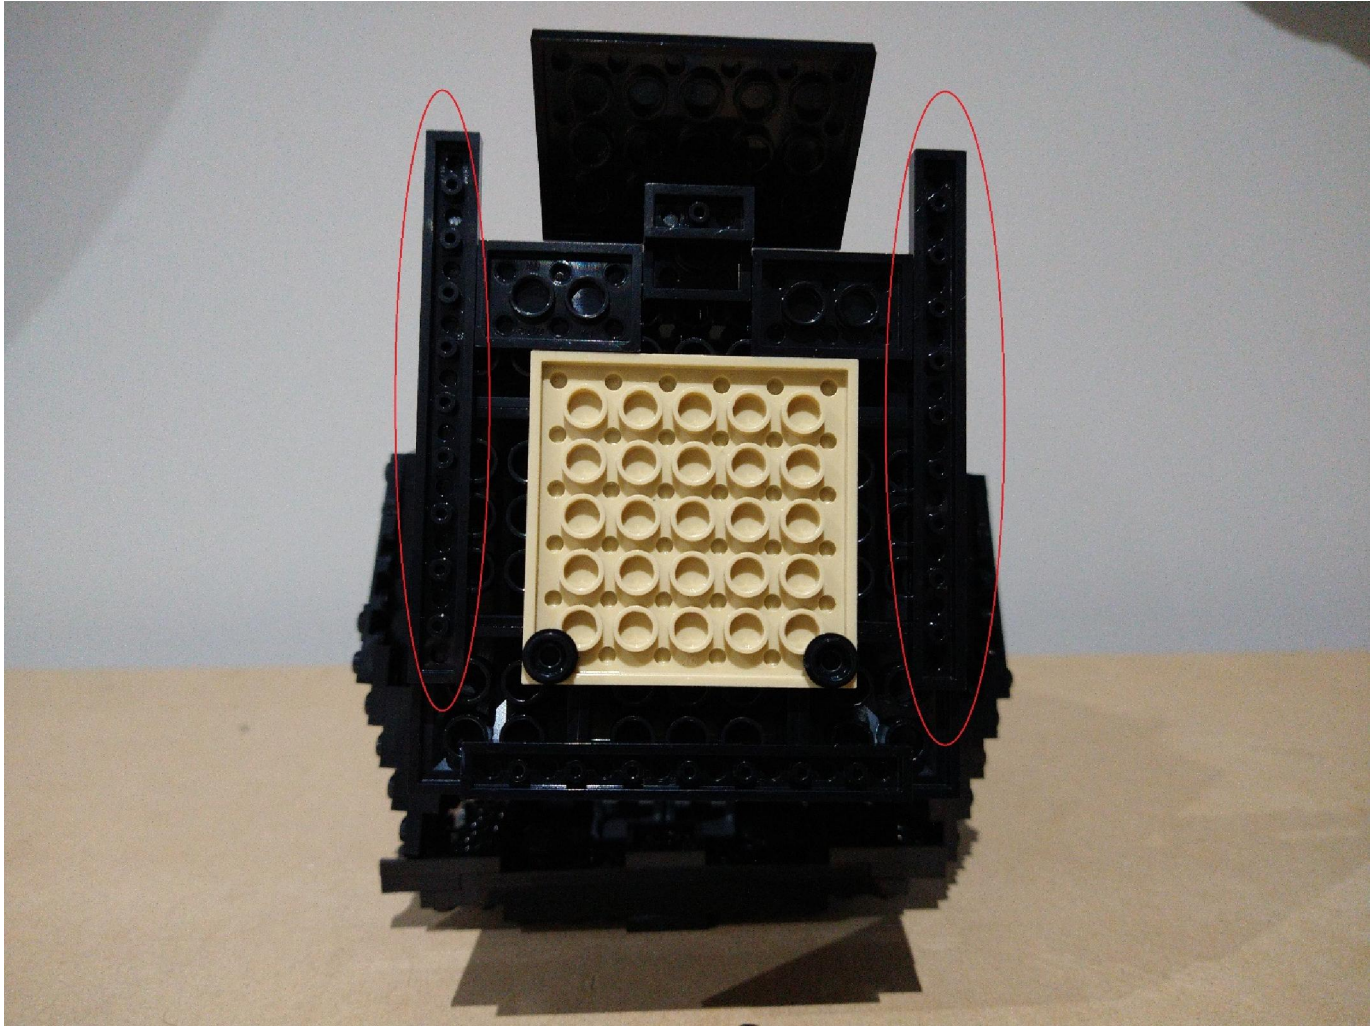


It should look like this when you turn it over.




Place the 1x3 spotlights onto the ends of the plates. You can hide the wires by running it underneath the base.

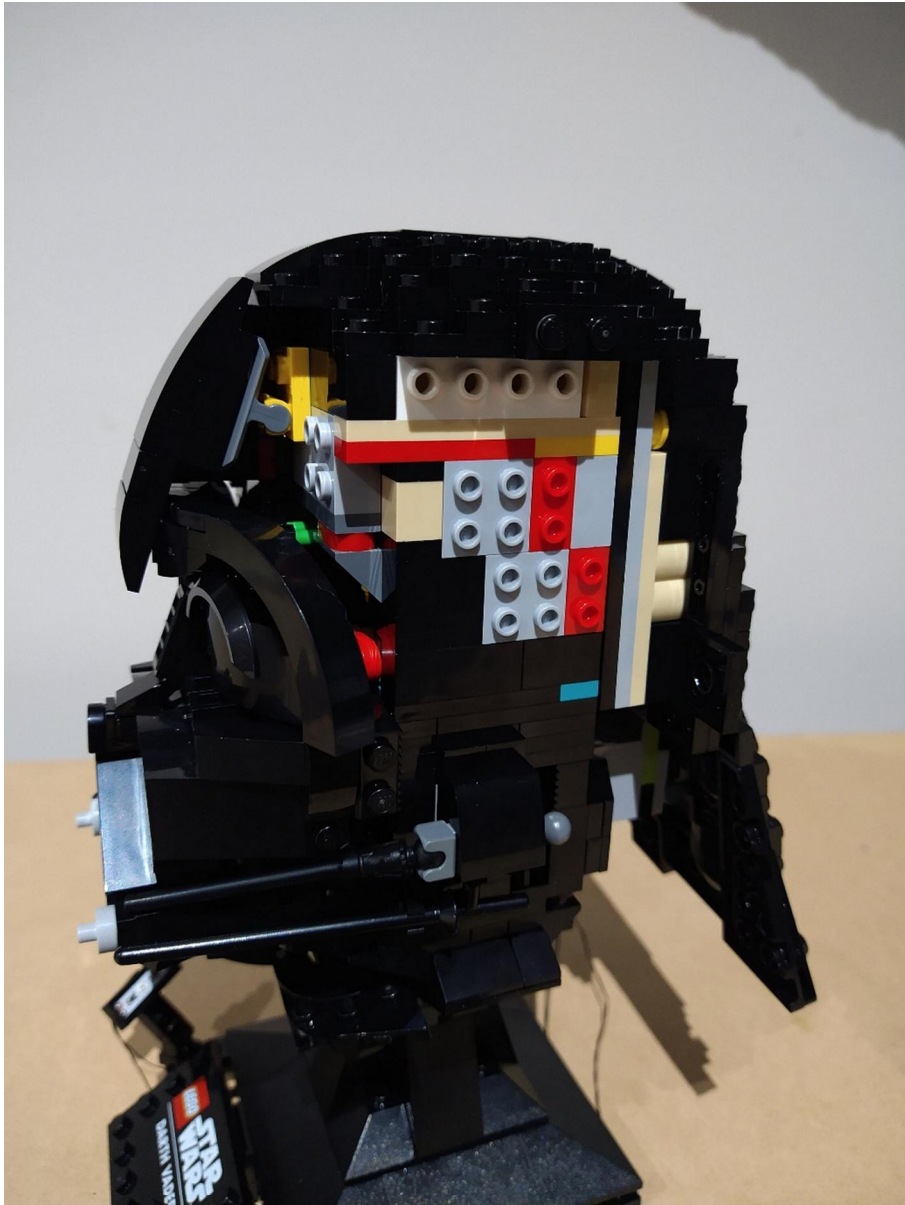

Remove his eyebrow and floppy ear.

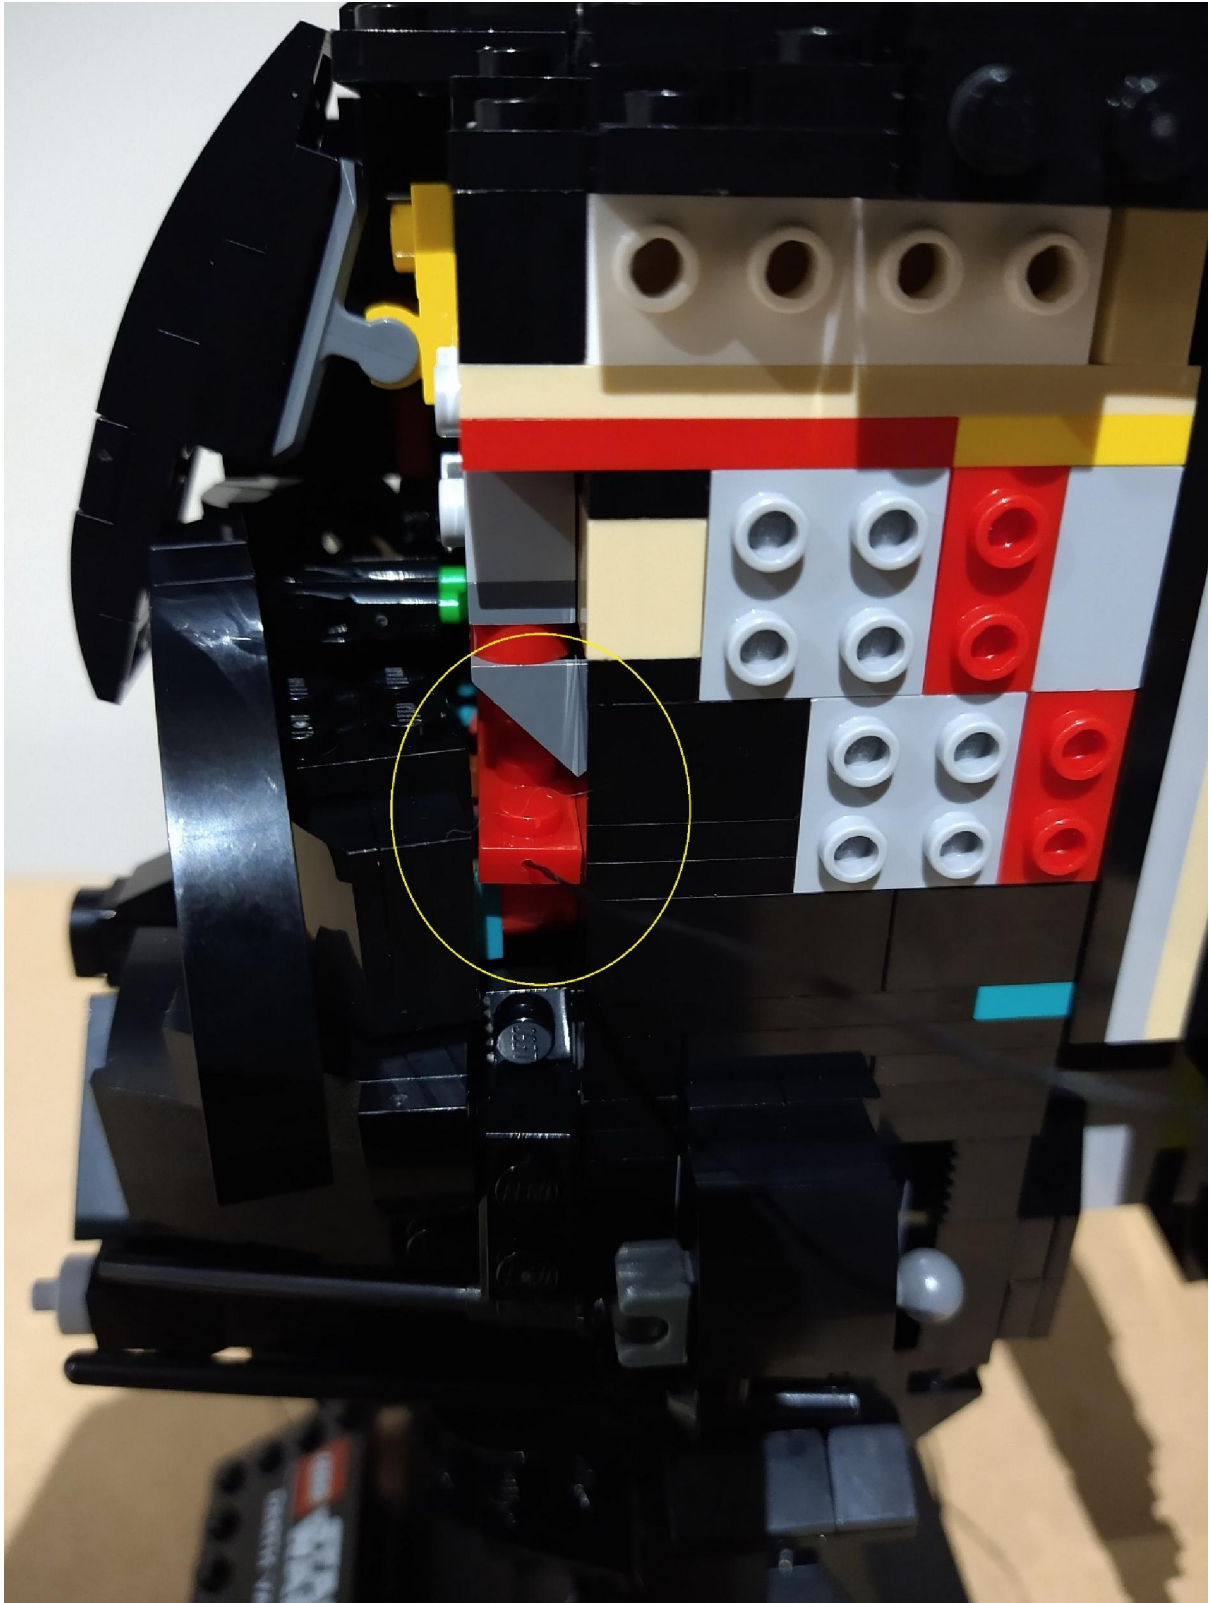

Insert the 1x6 red lighting plate face down in the gap as shown. Put his eyebrow and floppy ear back in place.

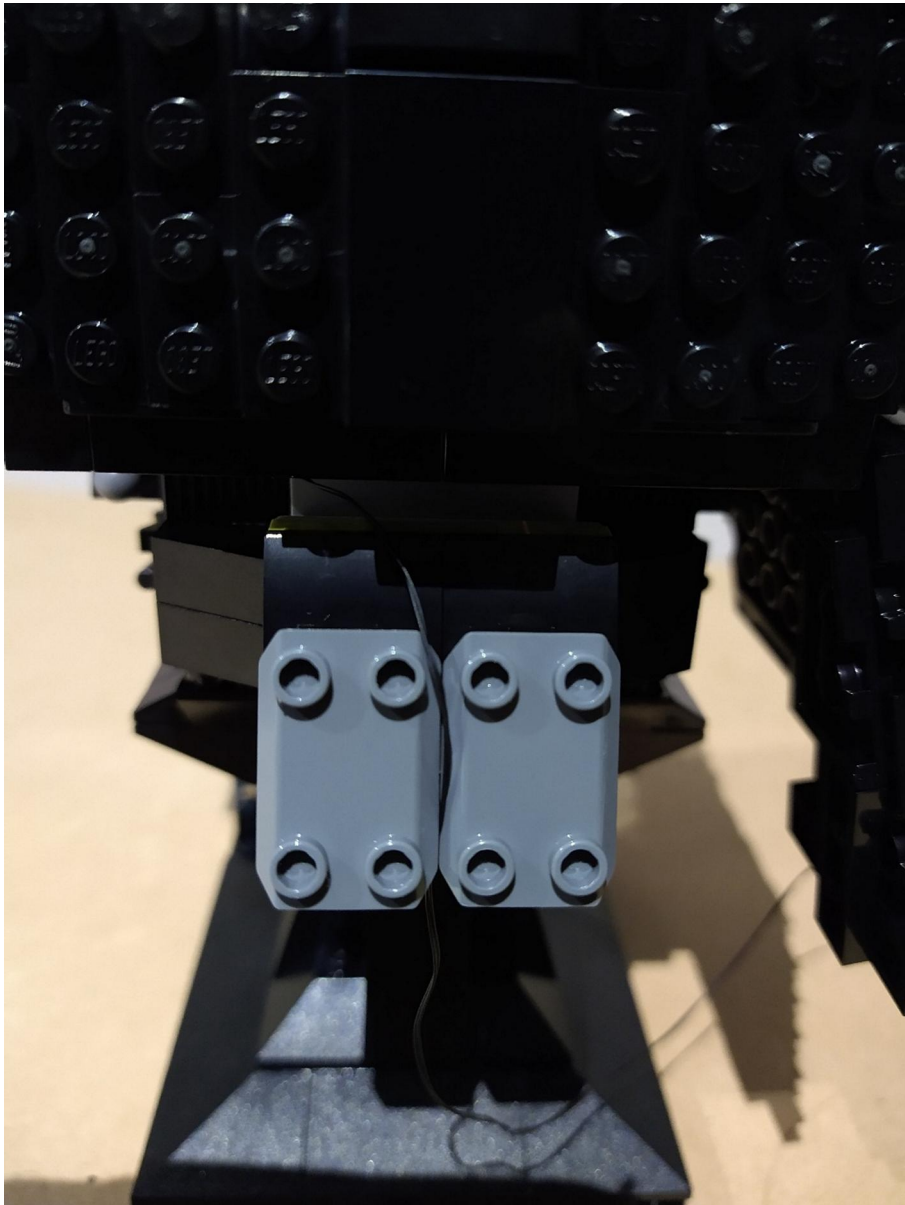

You can hide the wire by running it between these parts at the back of the helmet by removing his duck tail.



Turn it on you are done!