


# Lego 10497


## Galaxy Explorer

### *Installation Guide*




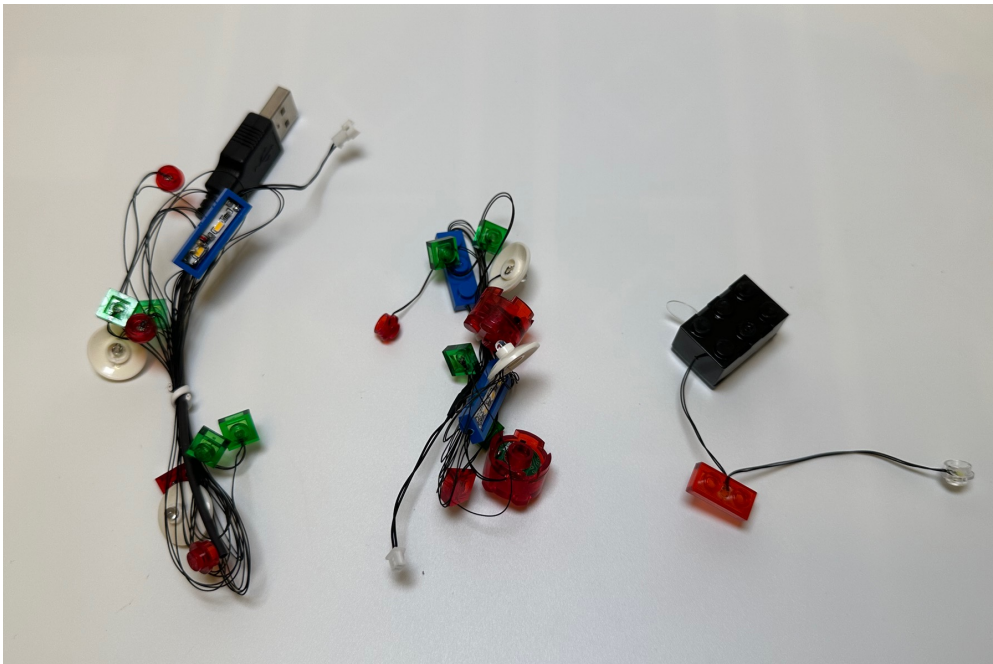


Take the lighting parts with battery box for the motor car

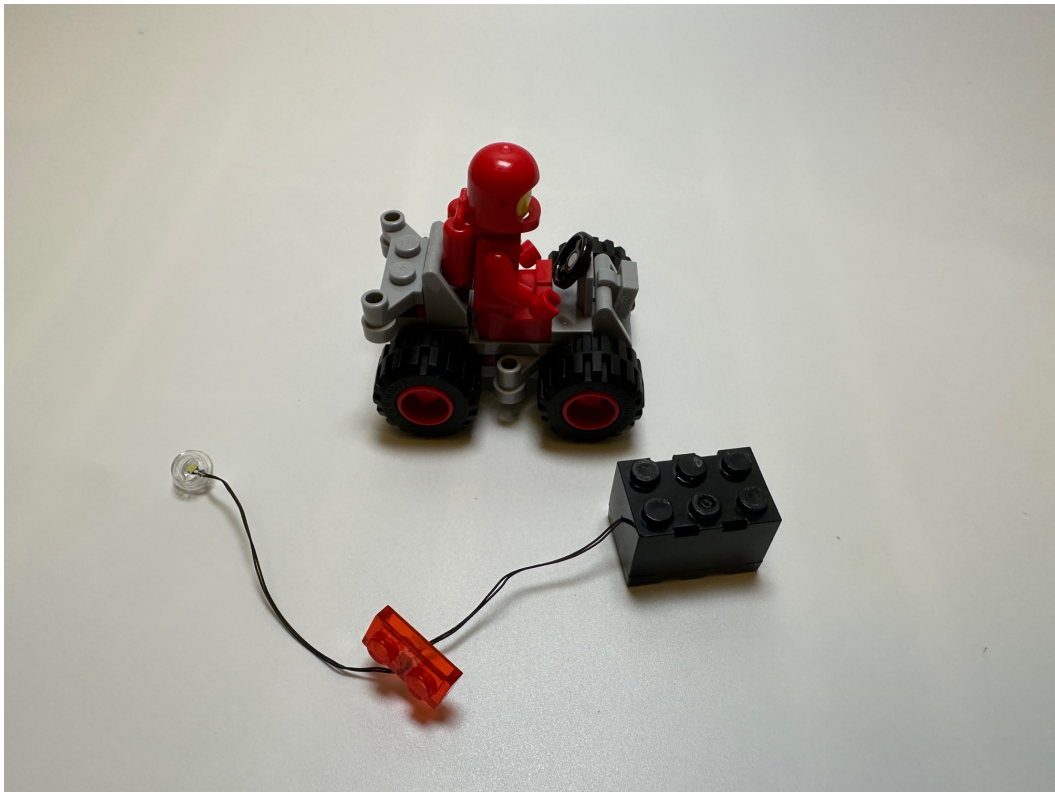

Take out the 1x2 plate at the back and replace by the lighting part

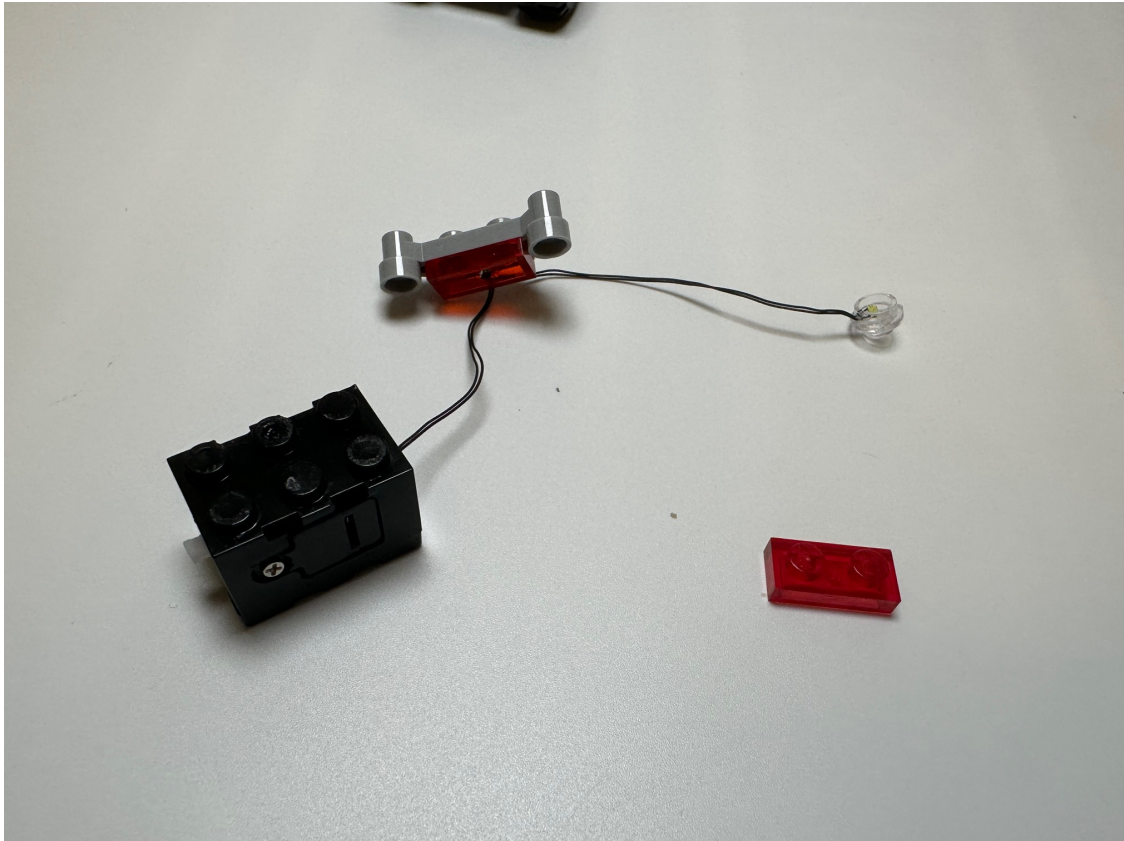

Settle the rear light and place the battery box at the back, move the remain lighting round plate to the front and switch the round plate

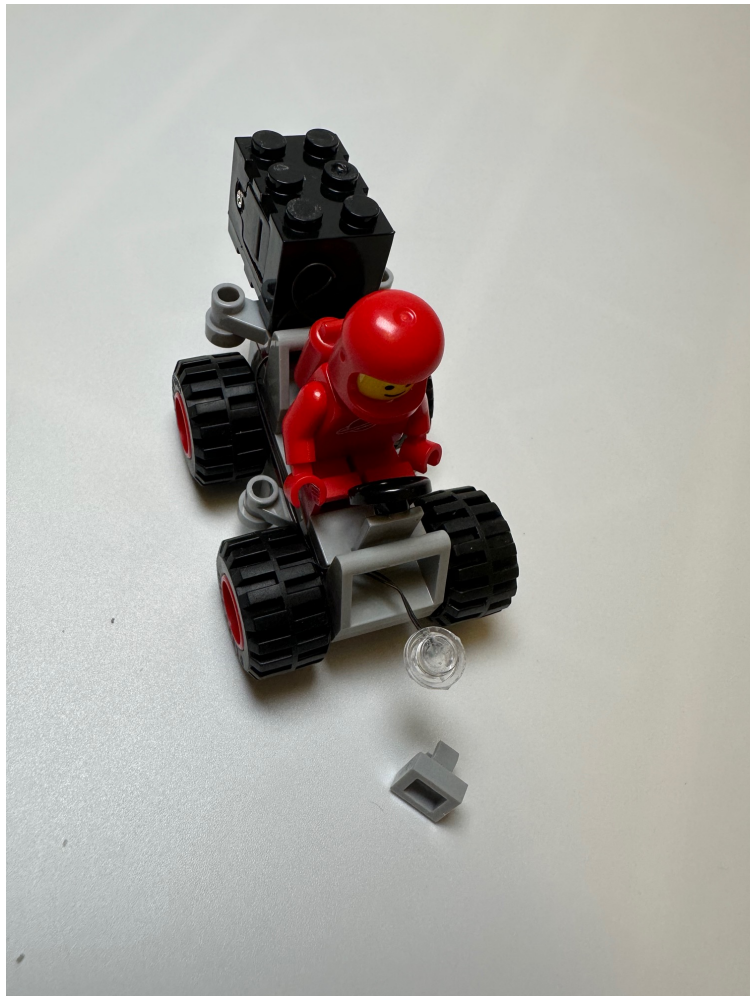





Now assemble the lights for the ship




Lift the windows and the slopes attached to assemble this lighting parts

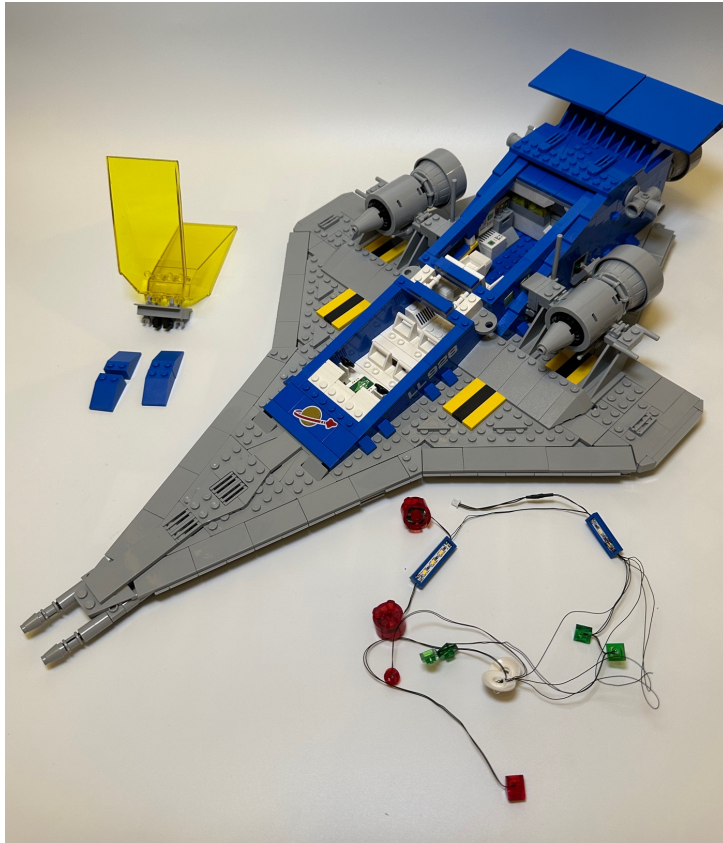


Remove the parts in red circle  
Replace the two red round blocks by the lighting parts

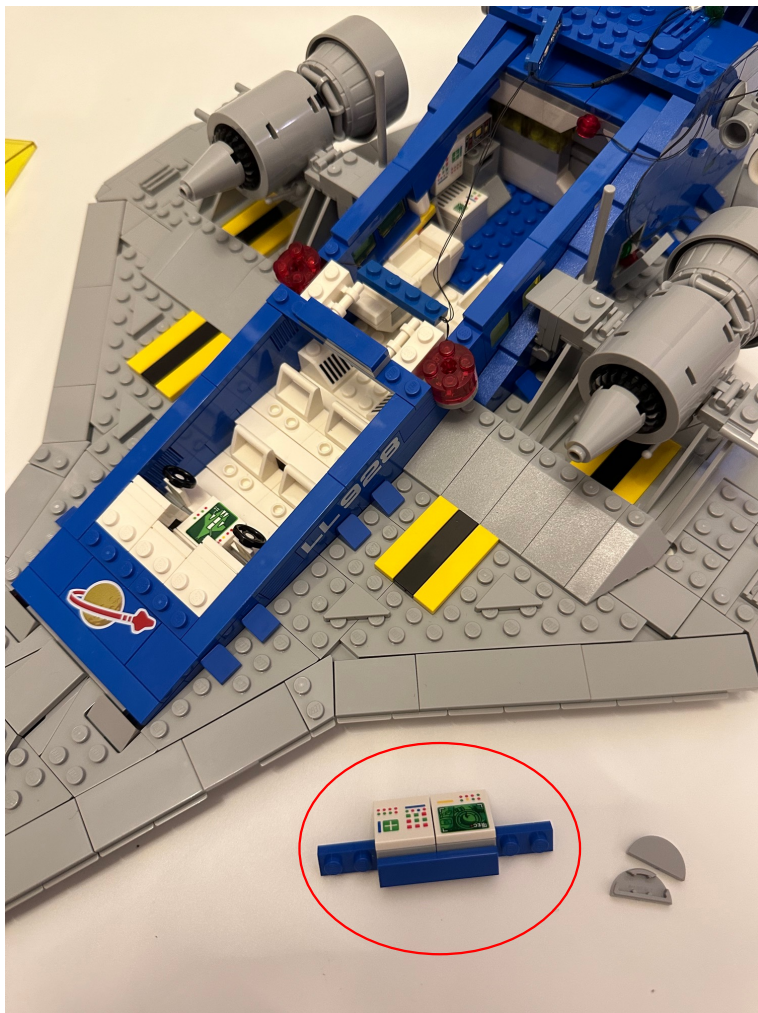


Assemble the lighting 1x4 plate to the removed part from last step and restore it

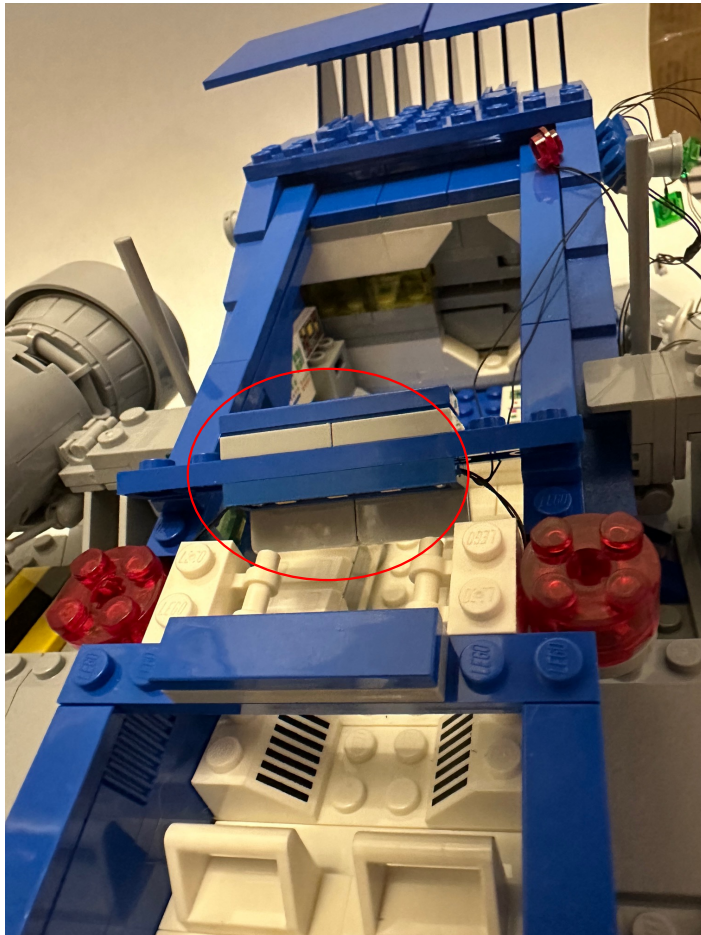


Then remove the shown parts at the back and assemble the 1x3 lighting plate on the side

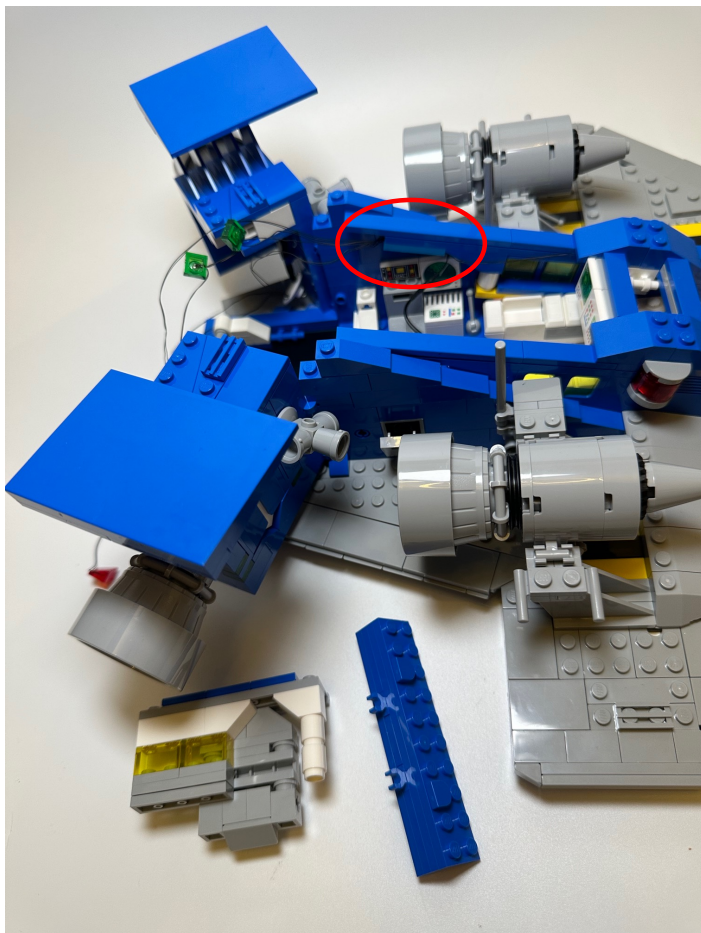


Move the remain parts to the side

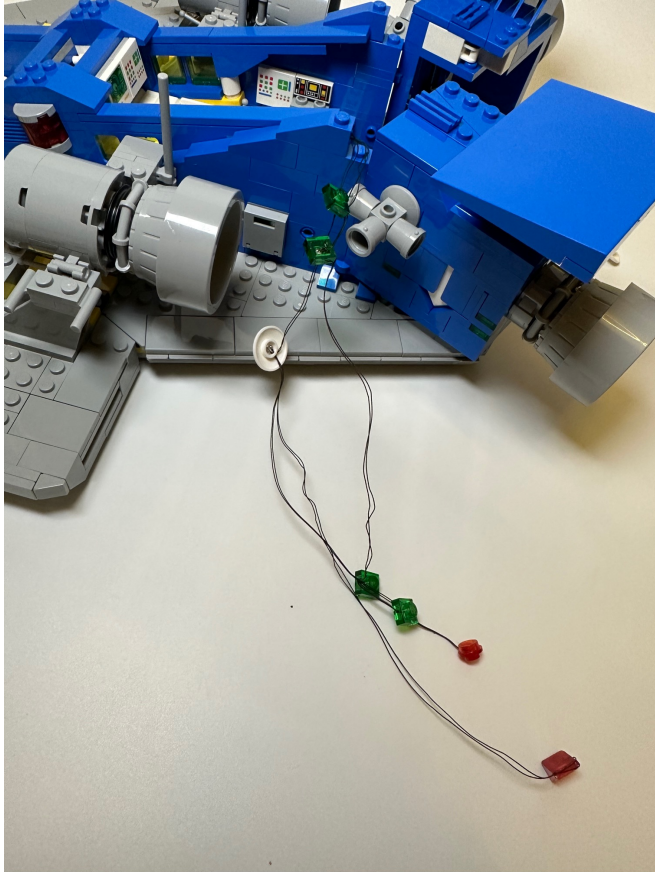


Assemble the lighting 1x1 green plates to the shown area

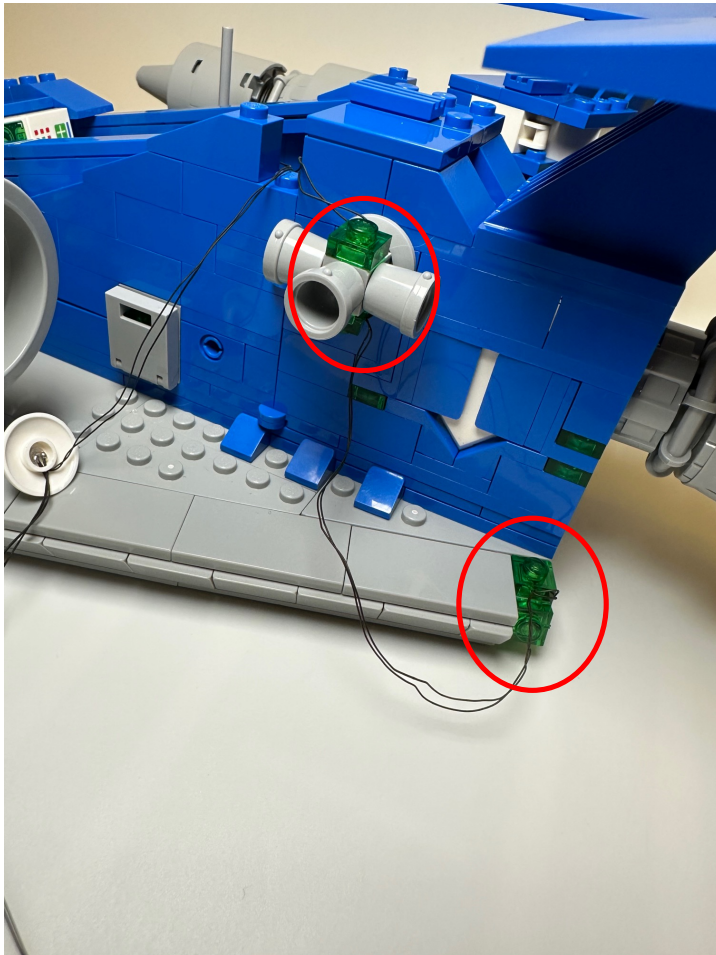

For the wires in between, hide it underneath the plate and tiles

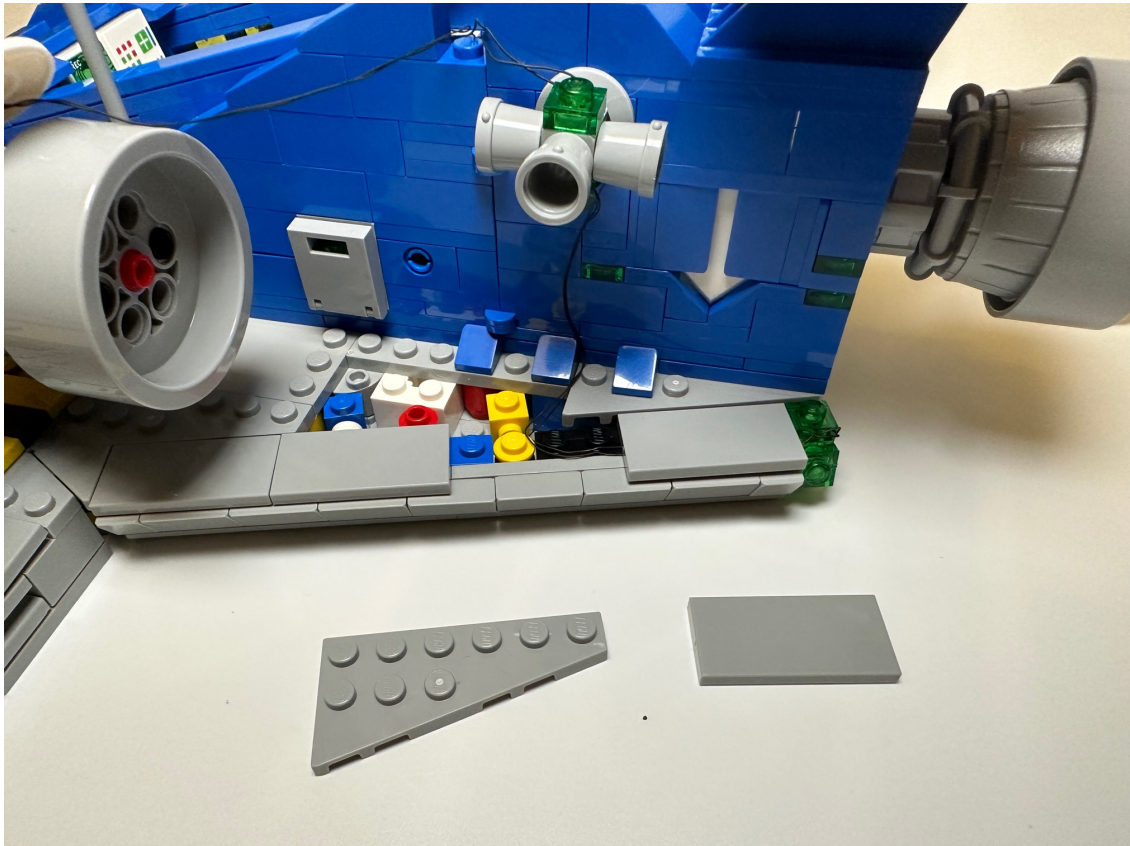


Assemble the lighting white dish to the booster then cover by the clear red dish

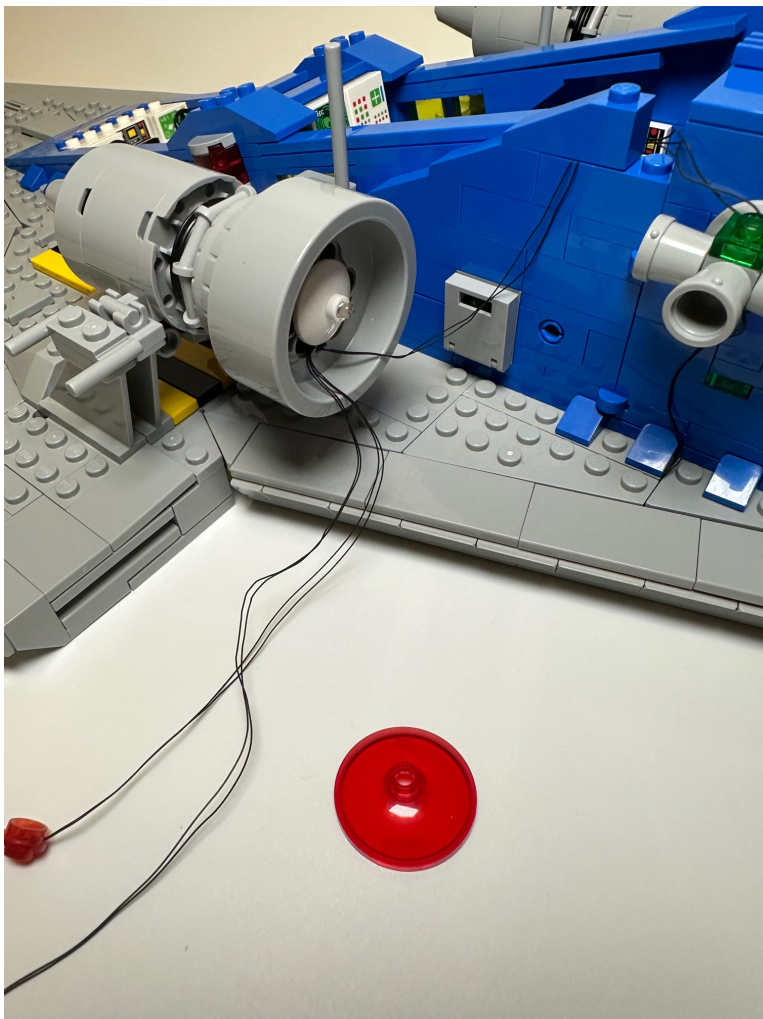





Assemble the lighting red round plate

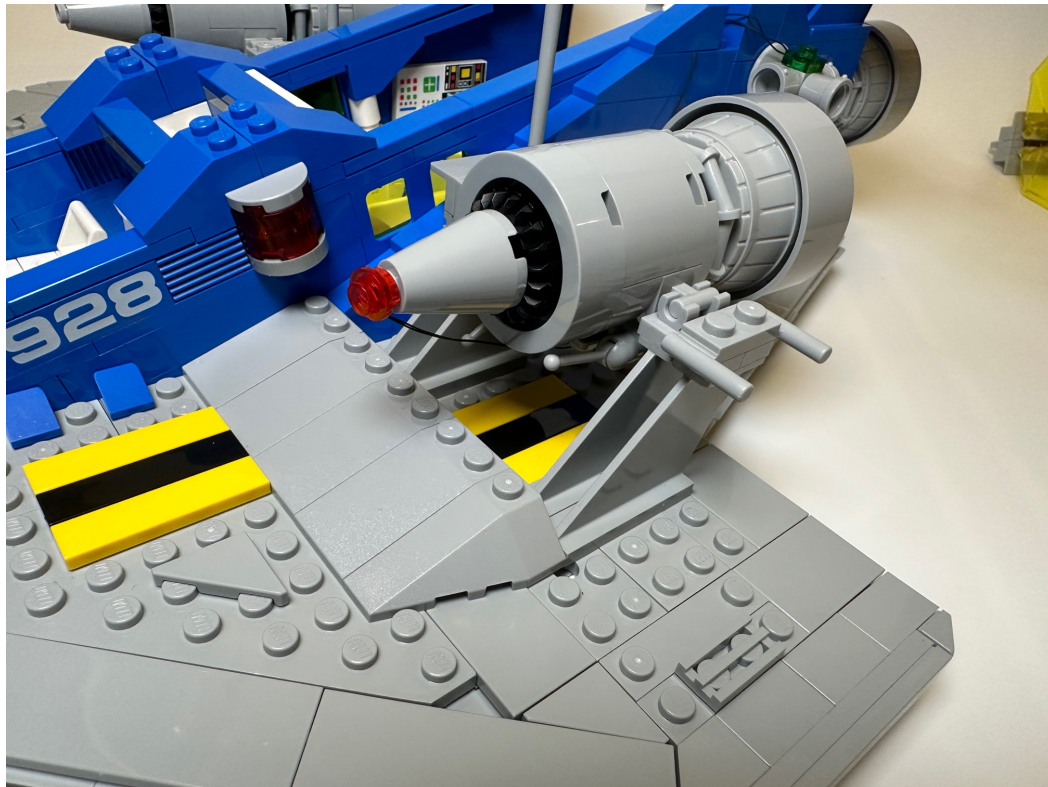


Replace the red slope by the lighting slope, hide the wire under the tiles

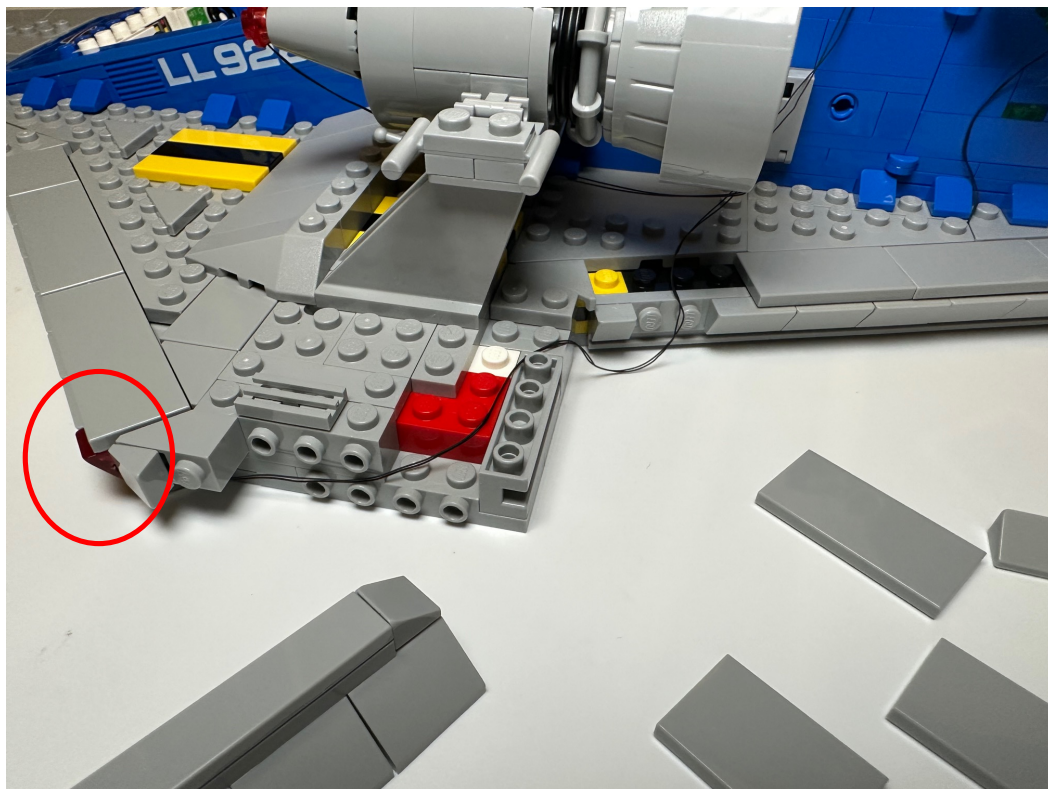


For the remain white lighting dish, assemble it at the rear booster, stable the wire in between the blocks shown

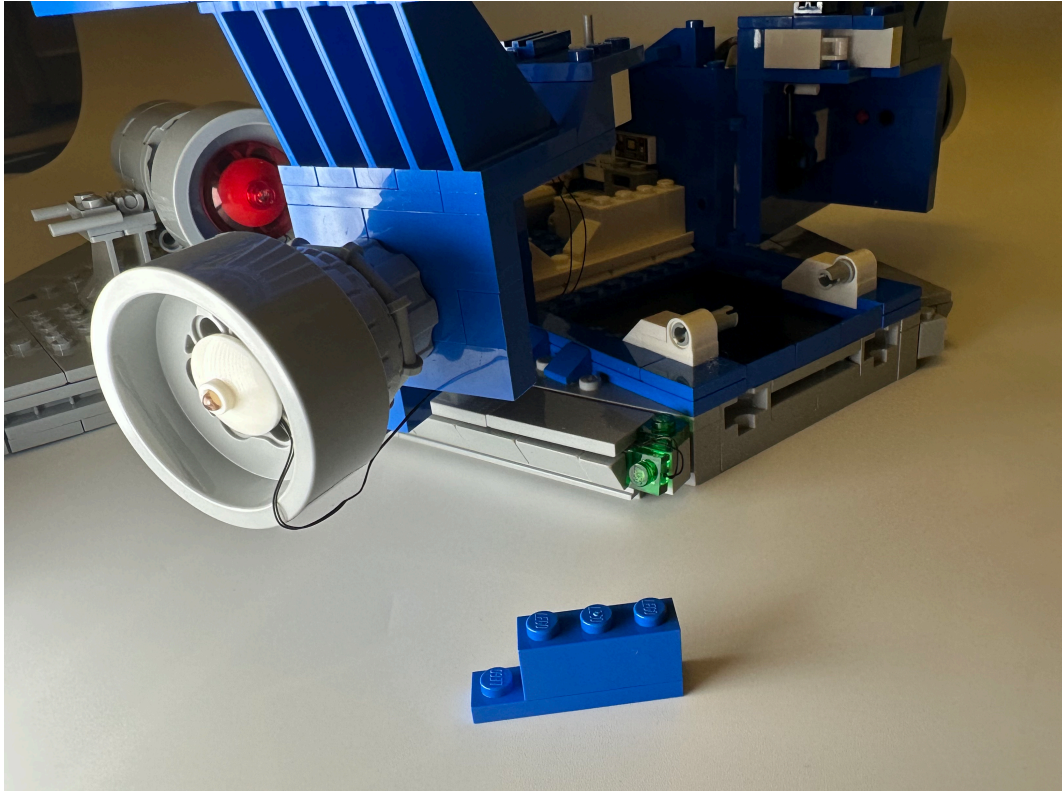


Take the other lighting parts, start by connecting both lighting parts  
Then assemble the 1x3 lighting plate follow by the connector

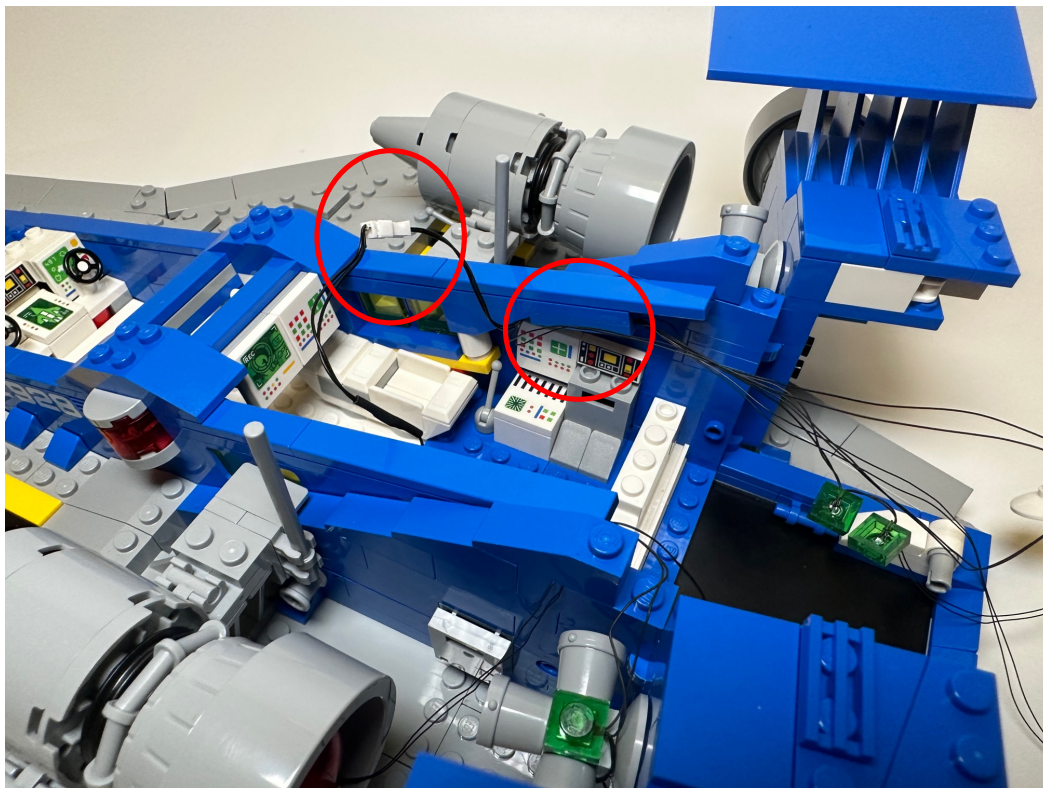



Assemble the single lighting dish to the rear booster by the same way as the previous one

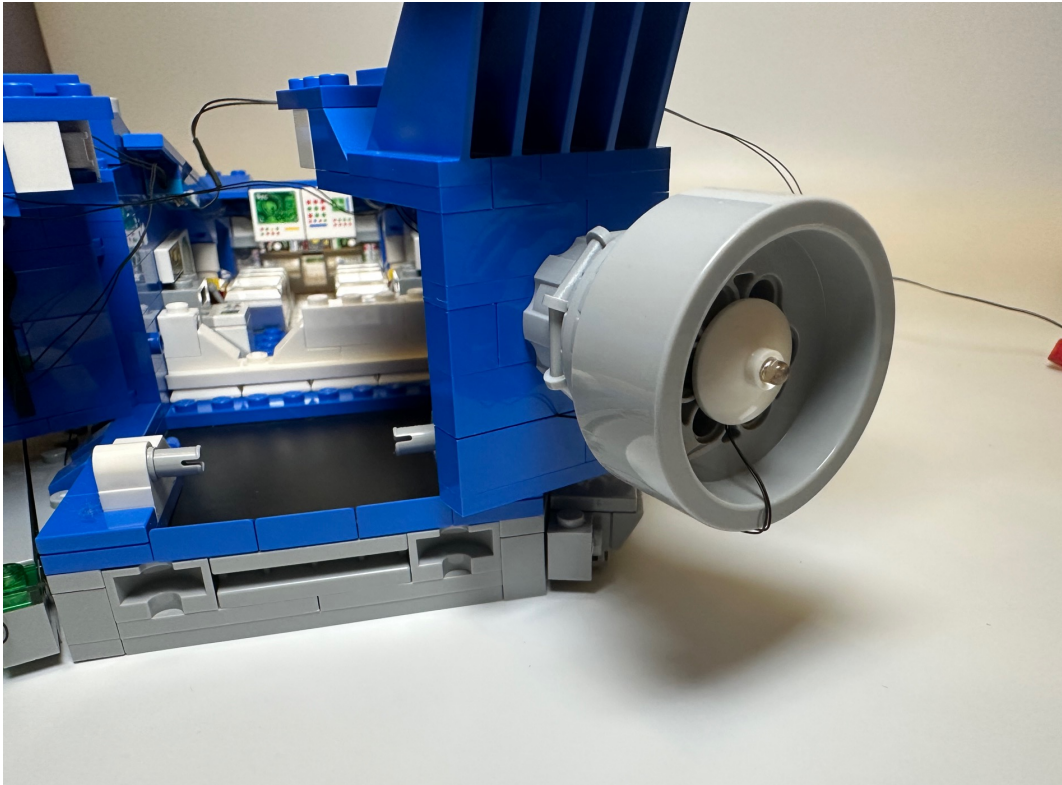


Assemble the green lighting plates same way as before

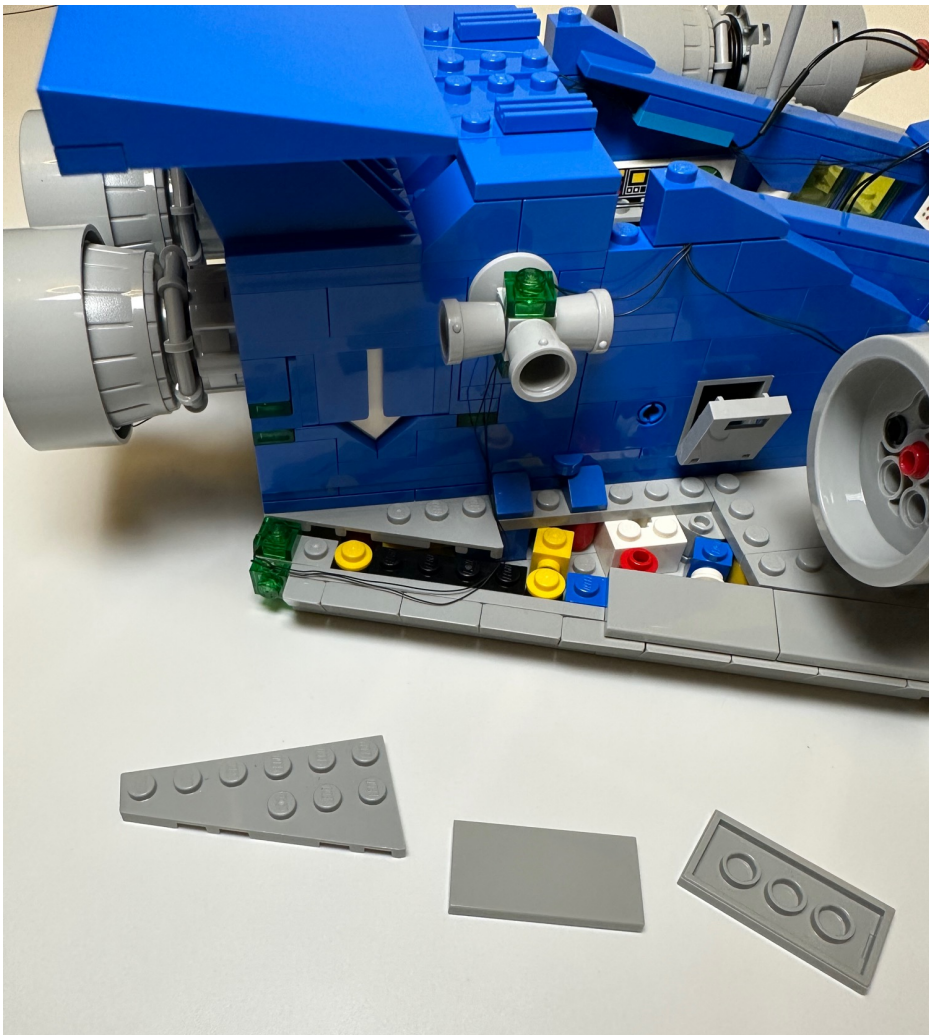


Assemble the other lighting dish with round plate attached to the booster

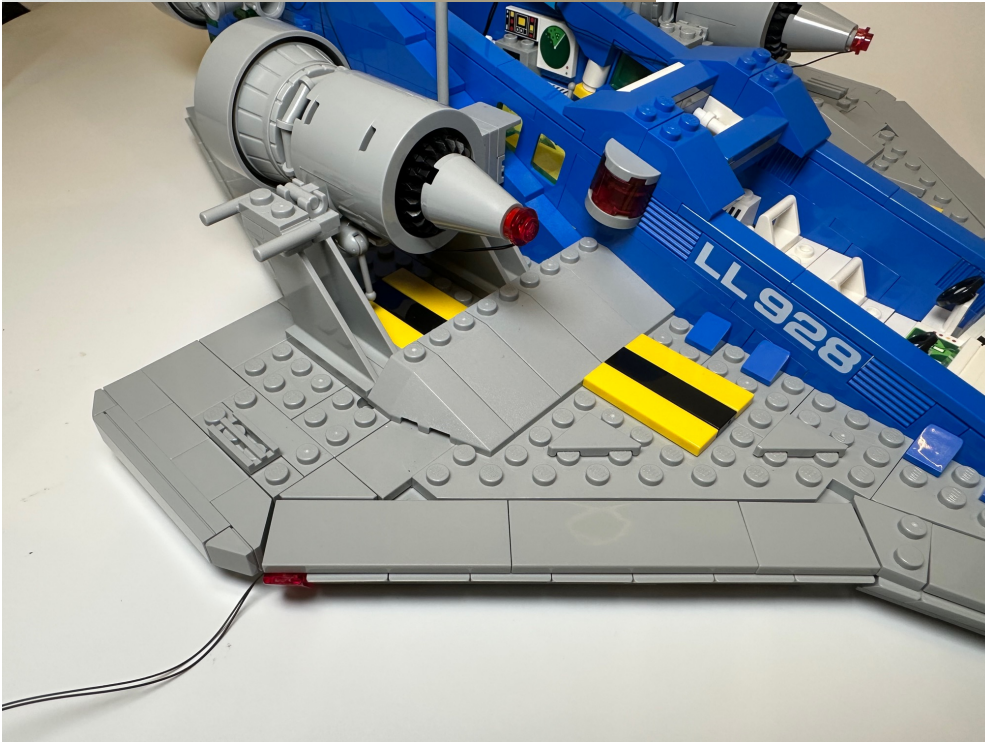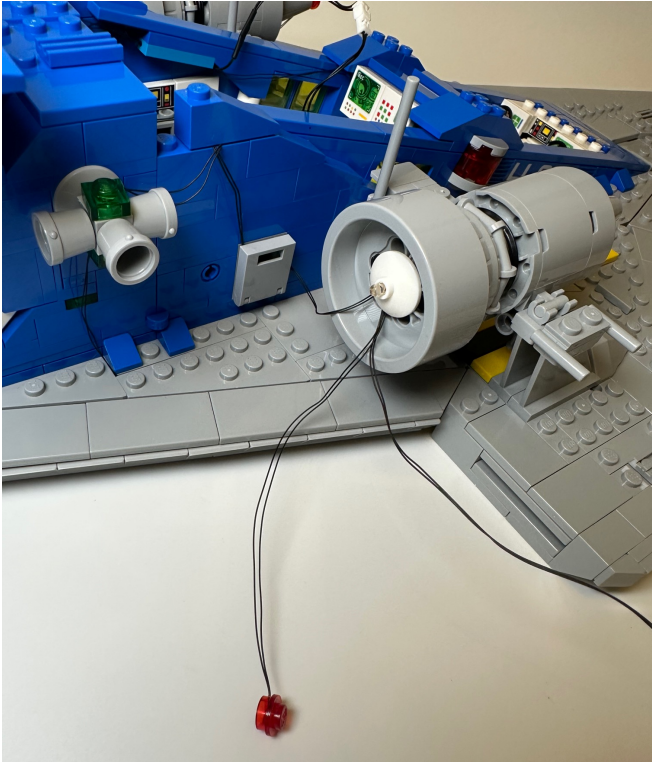


Then remove the clear red slope and assemble the lighting slope

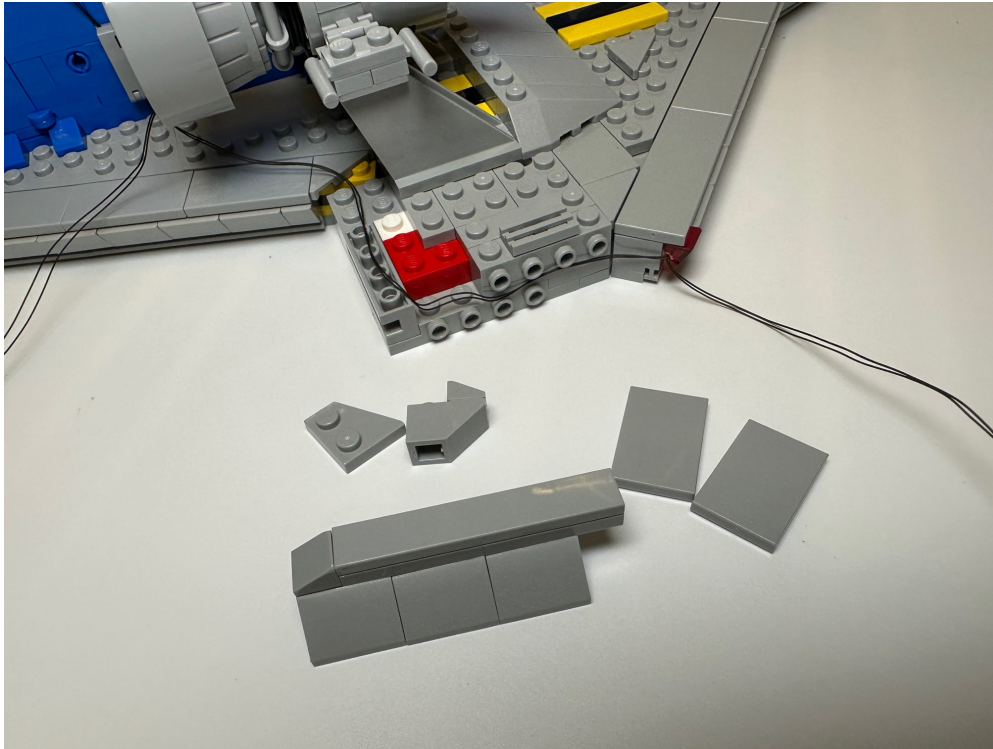

Move the remain lighting round plates to the front and assemble them

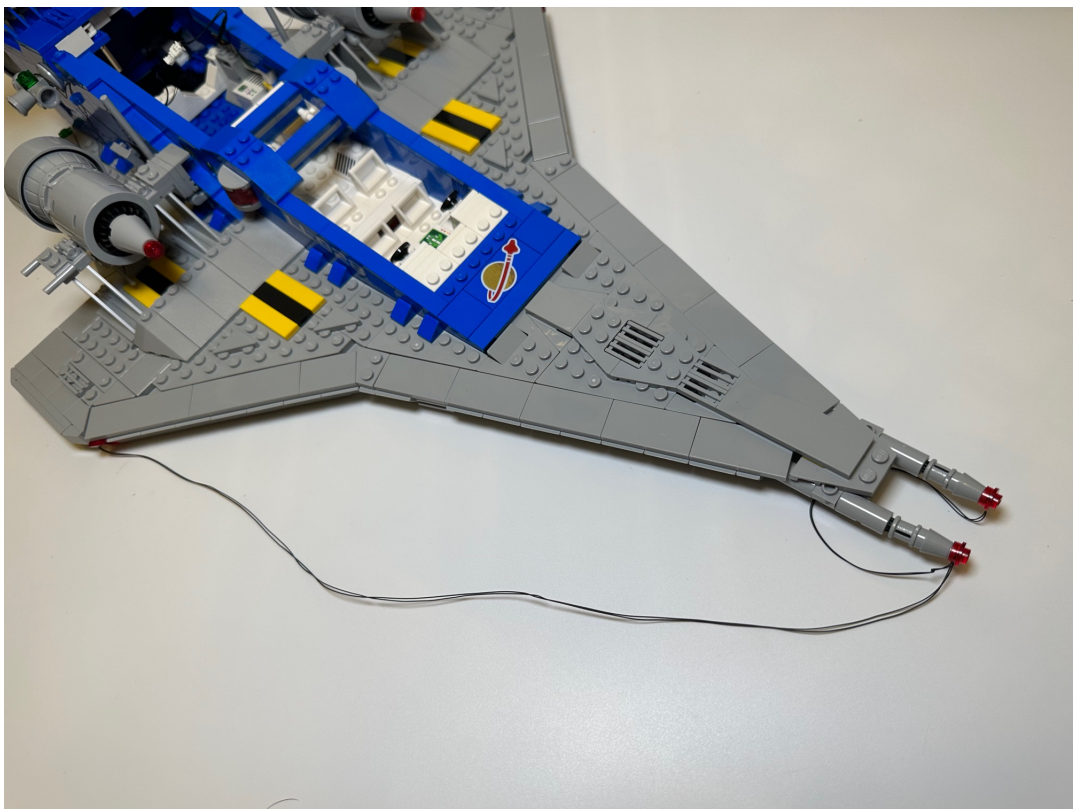

Stable the wire by the 1x2 plate removed from the motor car at page 2

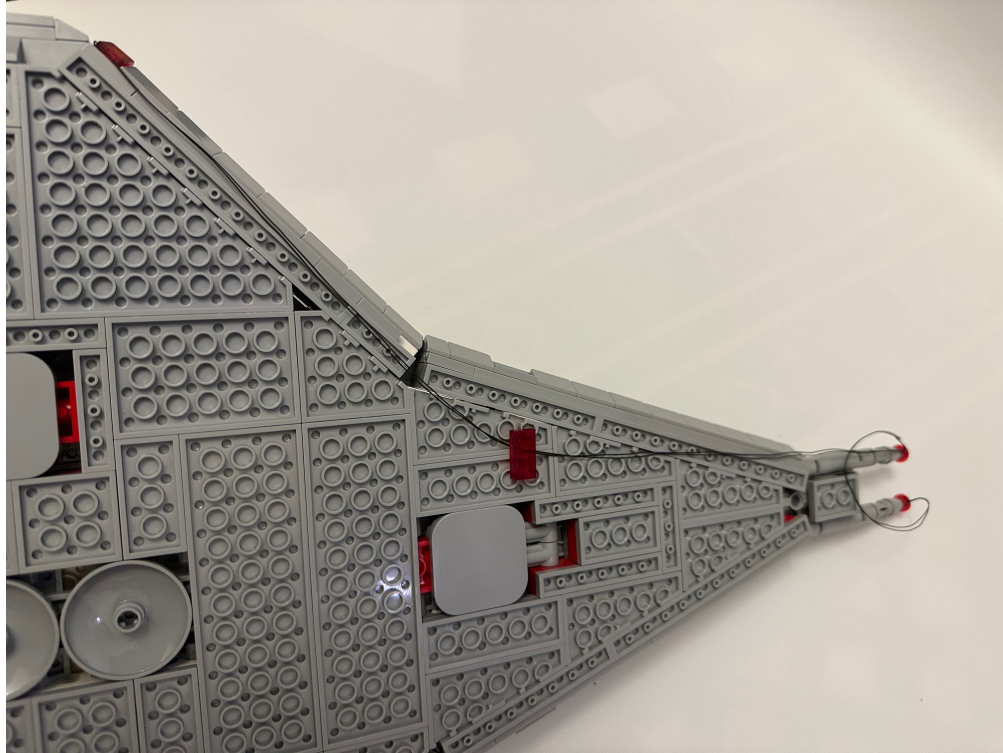

For the wire in between the round plates hide it under the plate and tile at the front end

