

First of all, detach the parts shown below



Assemble the red lighting plates as shown, then move the remain lighting parts to the top and the wire with connector to the bottom




Now you can restore the removed parts of the certain area



After restoring the face area then you can assemble the remain lights



Assemble the black lighting plates below the eyebrow area, then put the whole part back on the face

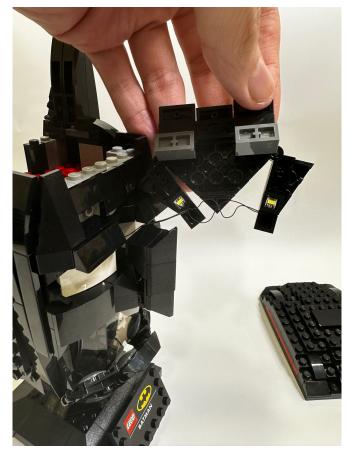

The installation of the lights are done at this moment



Now restore the top and start connecting the power cable



*Beware, if you powered by power bank with protection it might be turned off by itself due to the power consume is too little, then you need to power by AC adaptor or use the battery

