

Lego 10317


LandRover Classic Defender 90

Installation Guide







Start assembling the light for the front by the shown lighting parts

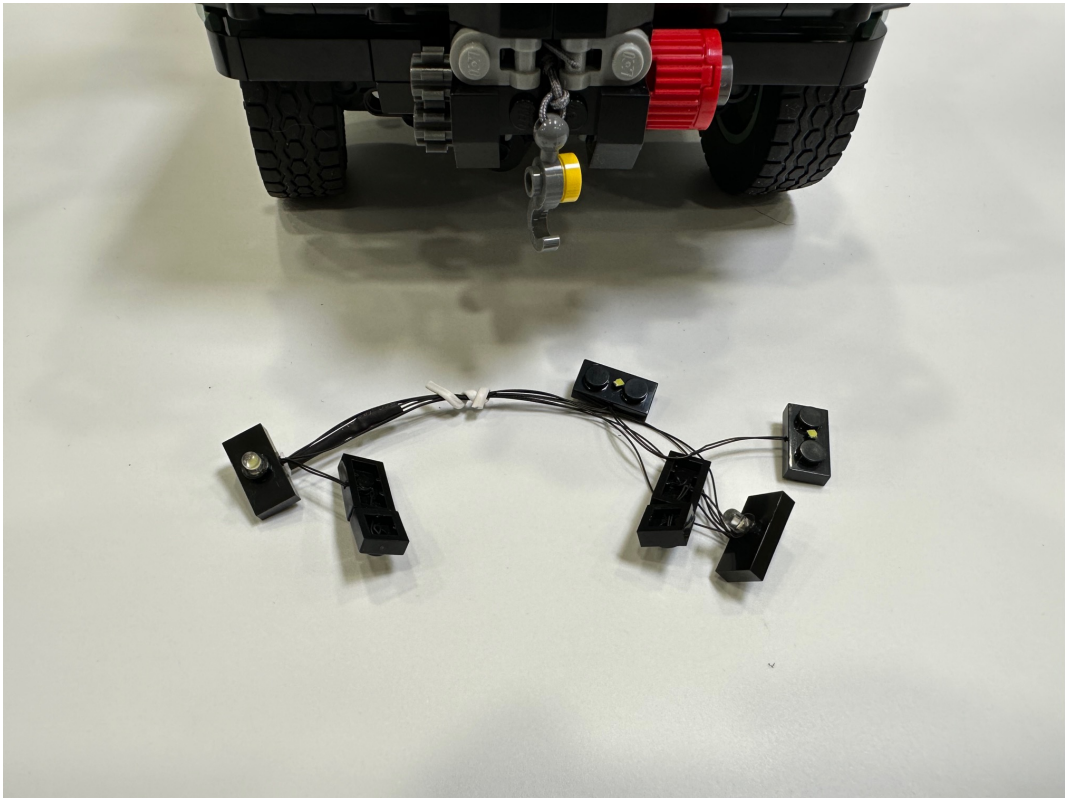


Detach the bumper, front lights and the parts as shown

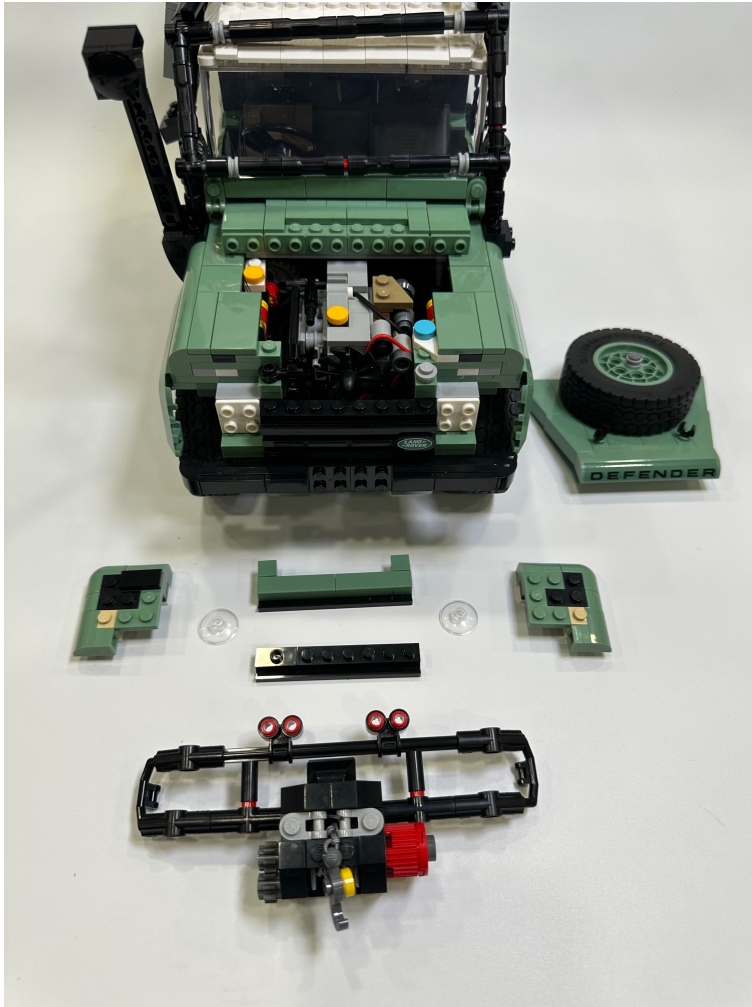


Replace the tiles with studs on both of the front lights by the lighting parts, please assemble it exactly same position as the picture

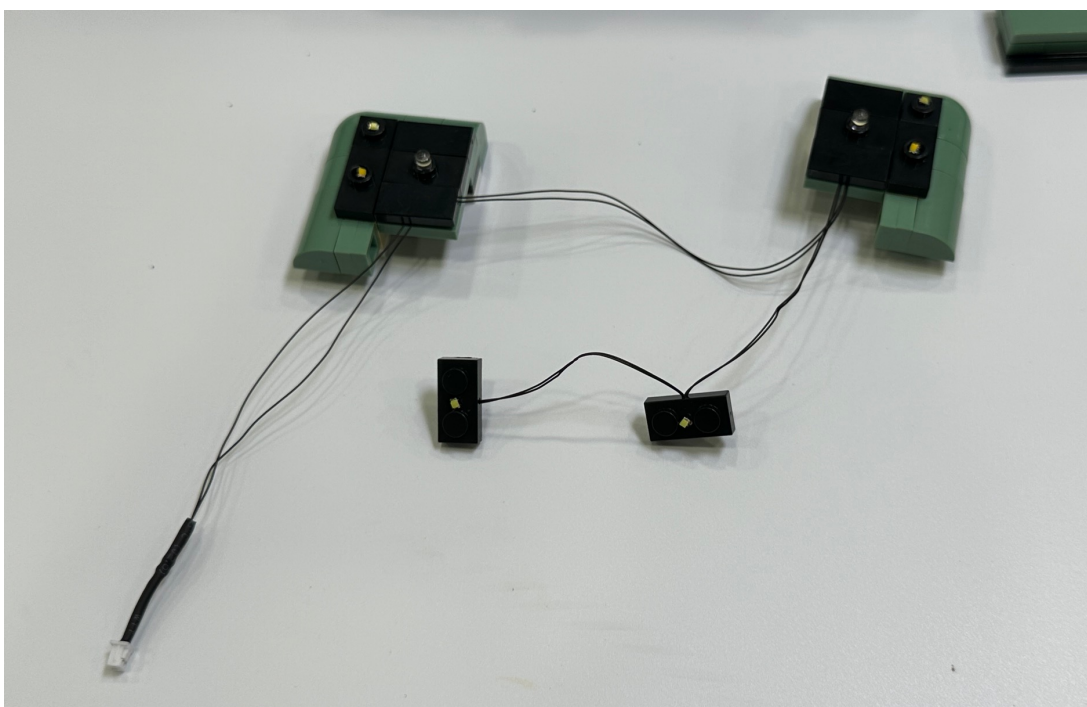


Before restoring the front lights, insert the connector into the shown spot, then the connector will be placed besides the tire

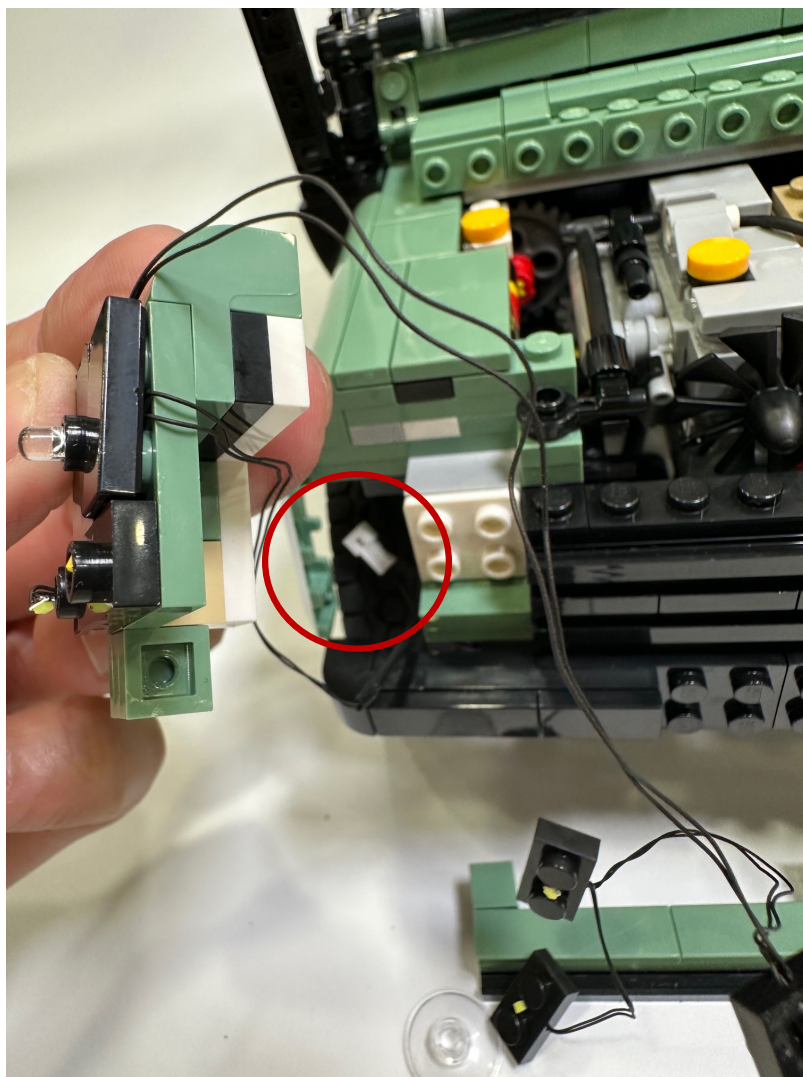

Then restore the front lights back to the car
And make sure the wire in between them are placed in between
the studs in middle

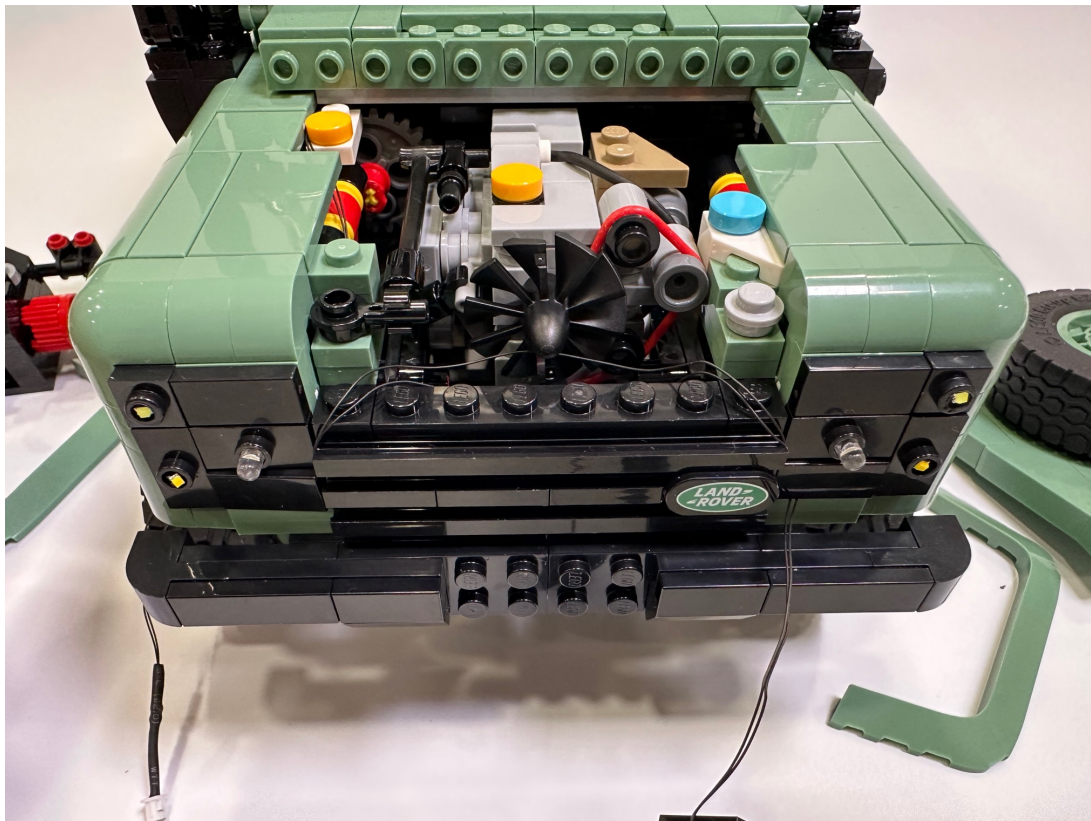


Now restore the parts in between the lights

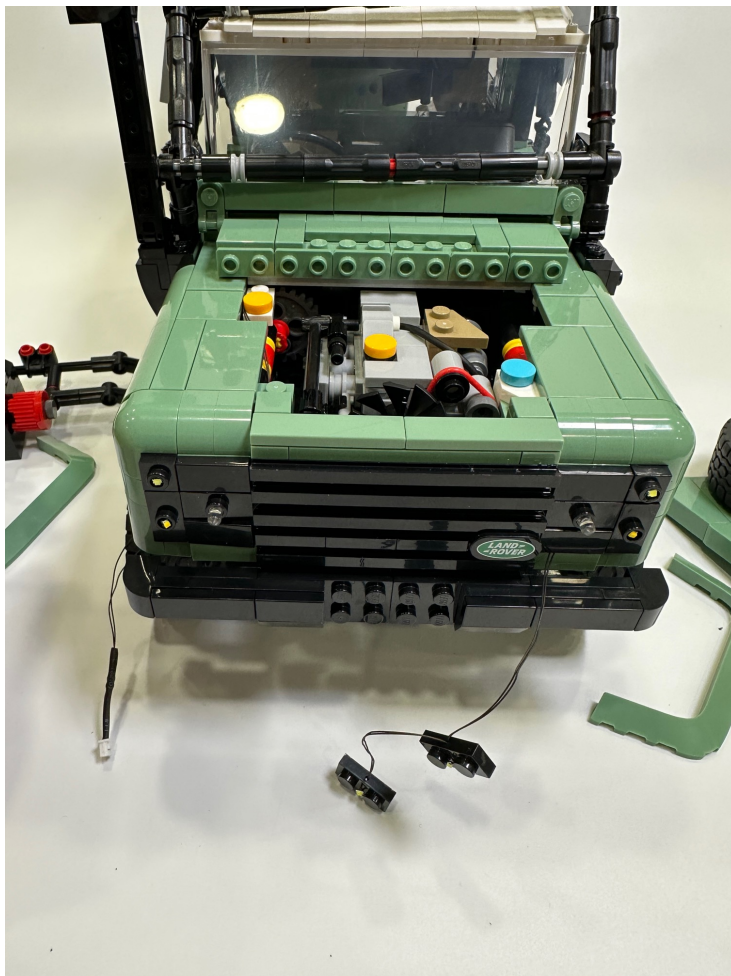

Put the clear parts back on the lights bulbs




Replace the 1x2 black plates on the bumper by the remain lighting plates

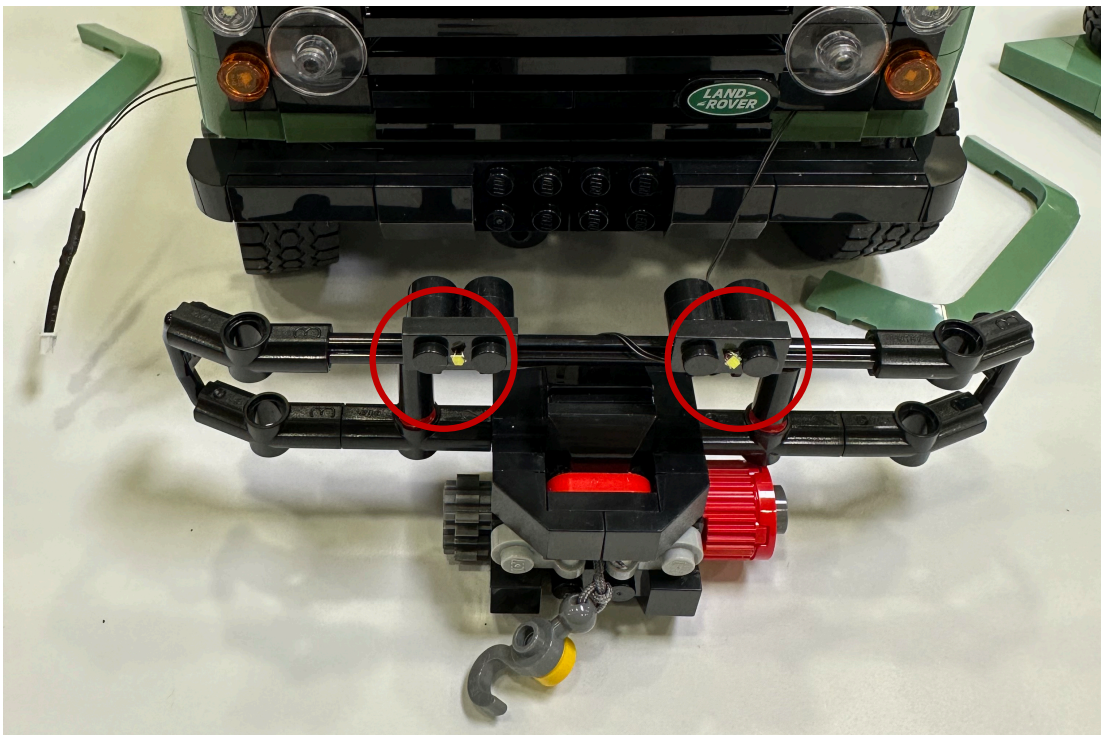


After all, restore the clear tiles on the bumper and put the bumper back, this part would be finished



Now remove the shown parts of the car to assemble the lights for rear side

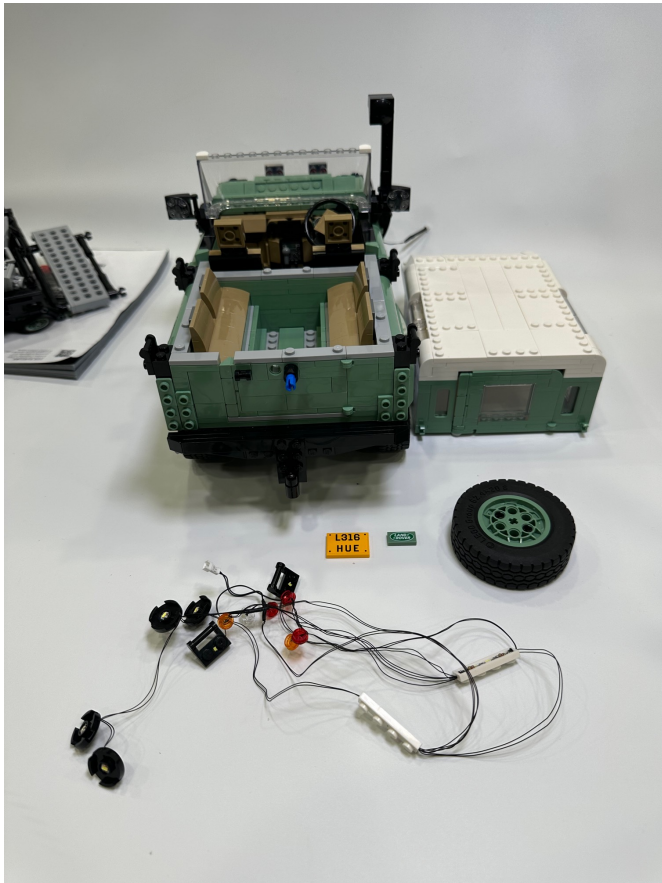


Replace the clear red and orange round plates by the lighting parts, remember to follow the original colors

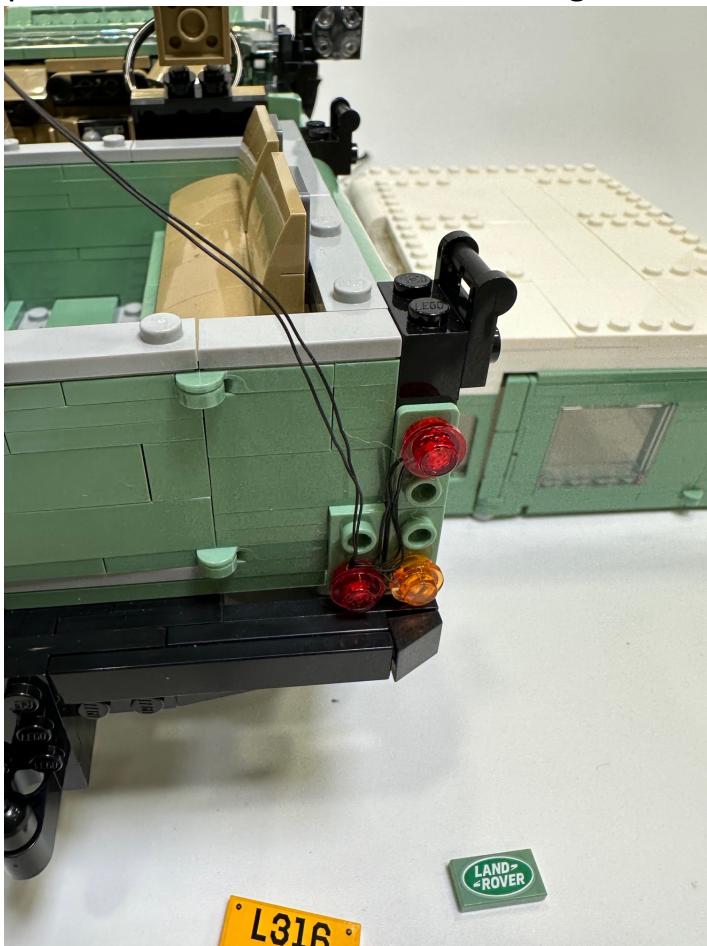


Restore the LandRover tag to cover as many wires as you can, put the removed round tiles on the lights then move the rest lights in the car




Assemble the lighting round plates on the left side
Again put the round tiles back on the lights

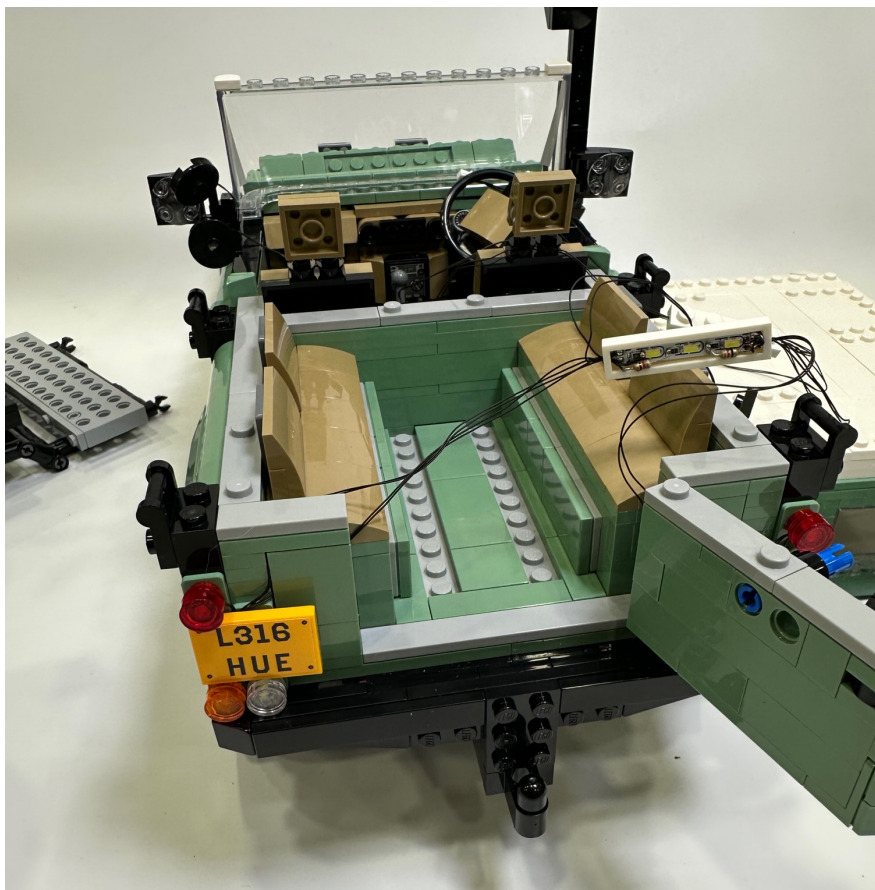

Assemble the 1x4 lighting plate as shown, detach the shown parts to make space for moving the black lighting plates to the top

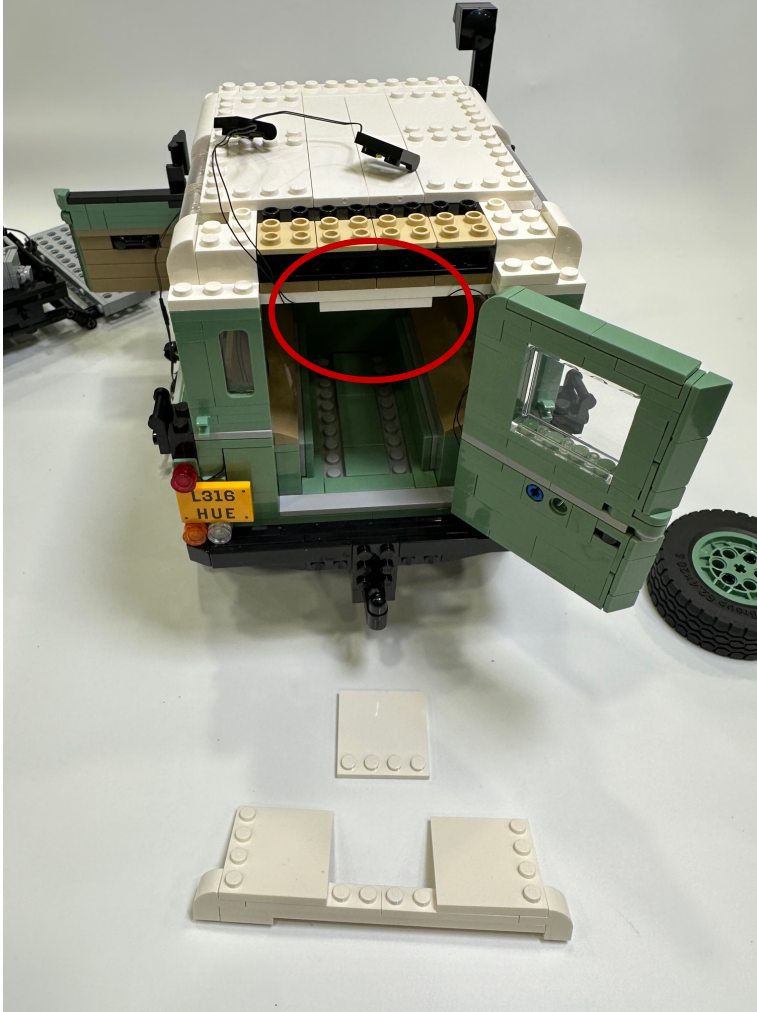

Place the wire in between the studs to prevent getting damaged when restoring the white parts removed from last step

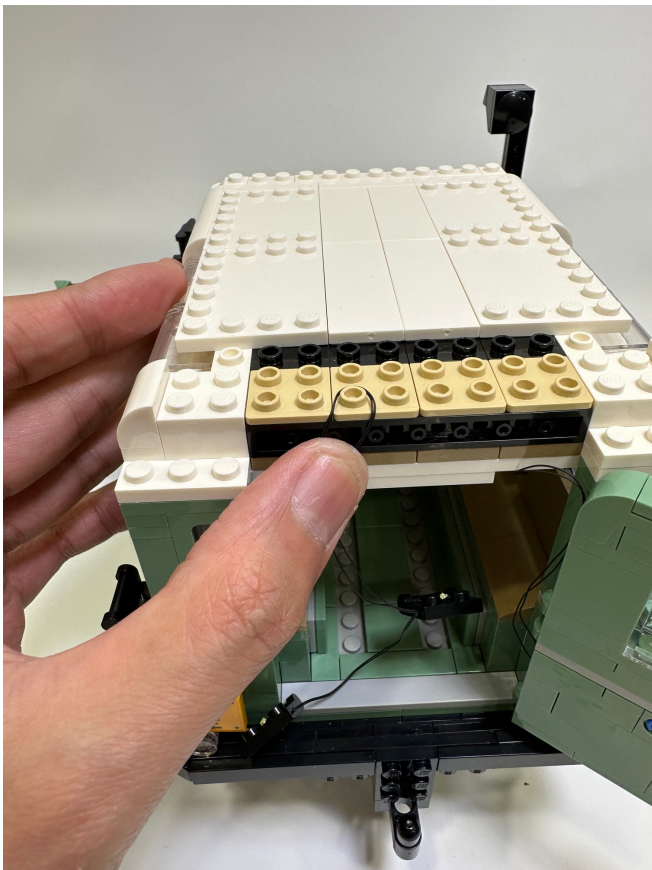


Put the removed parts back to the top



Assemble the other 1x4 lighting plate as shown




To the remain lights to the top, remove one of the slopes to make space for them and restore the slope after that

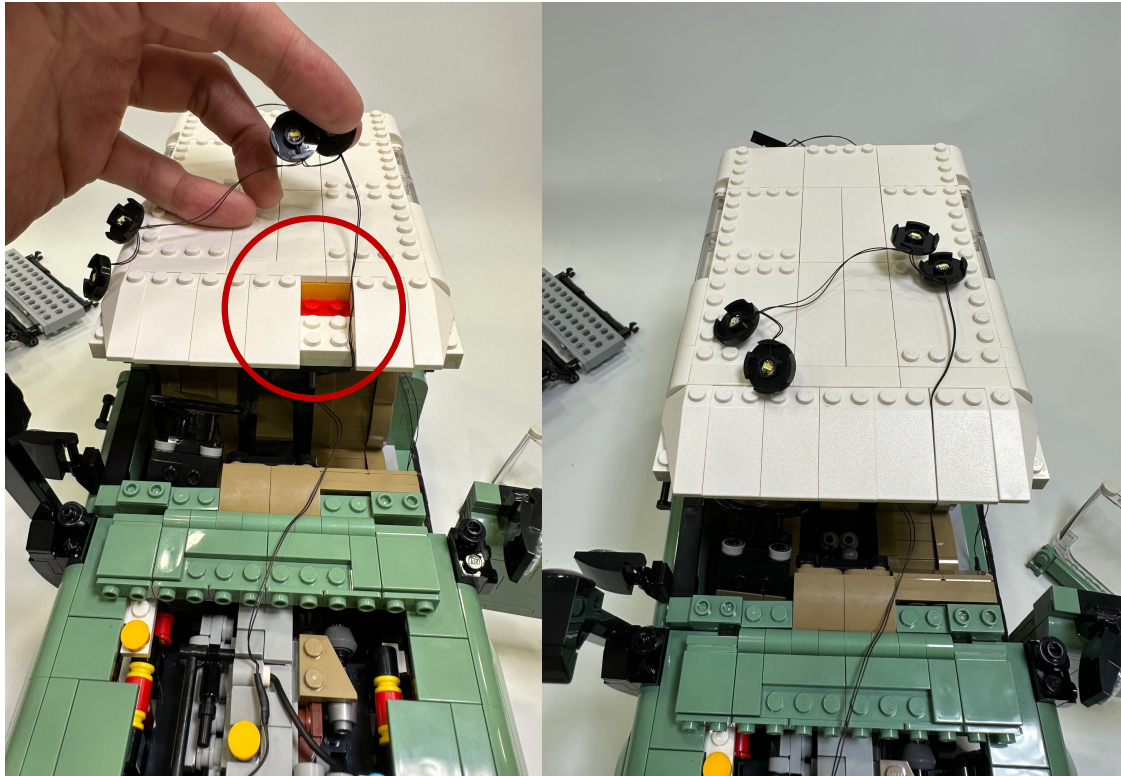

Connect the wires with the other lighting parts



The wire to the engine part can be placed in between the shown studs

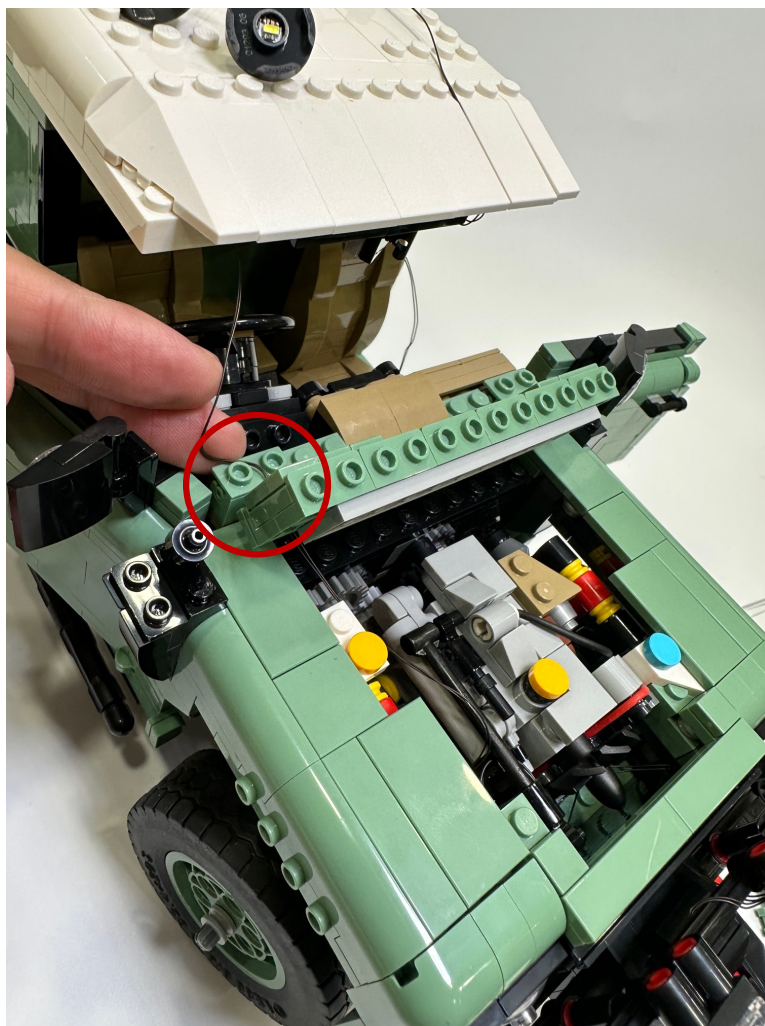


Then you can restore the windshield and the engine cover



The only connect left inside the car will be used for powering up



Now put the rack back on the car, assemble the lights and restore the clear round plates on them

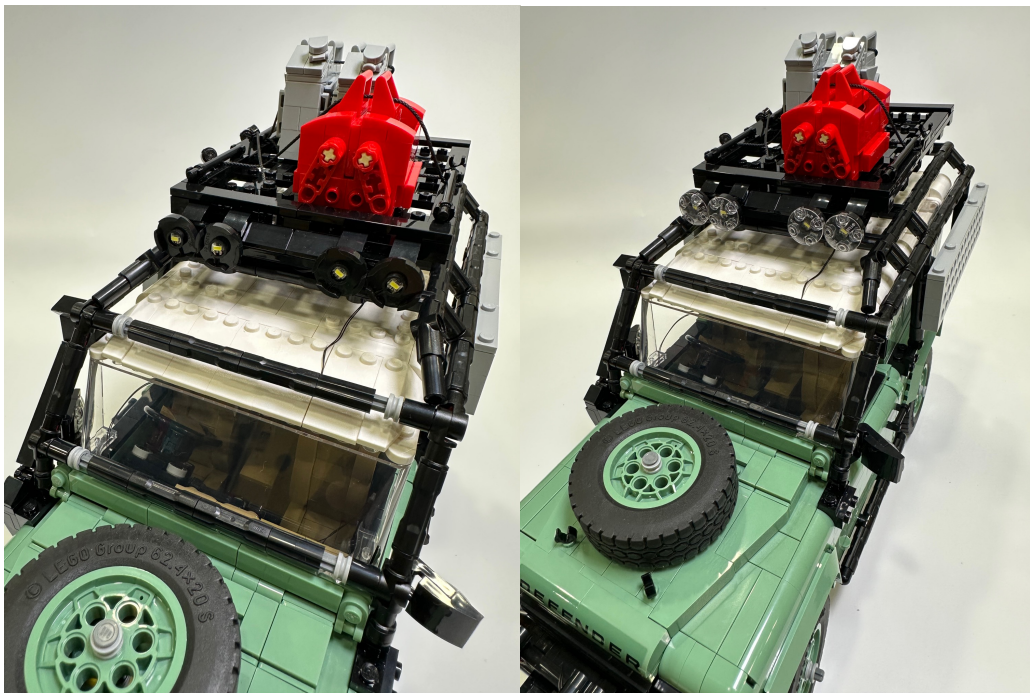

Place the rear lights on the rack and put the removed 1x2 clear tiles on them



At last, you may choose to power up by USB or battery

