


Lego 21340

Tales of the Space Age

Installation Guide




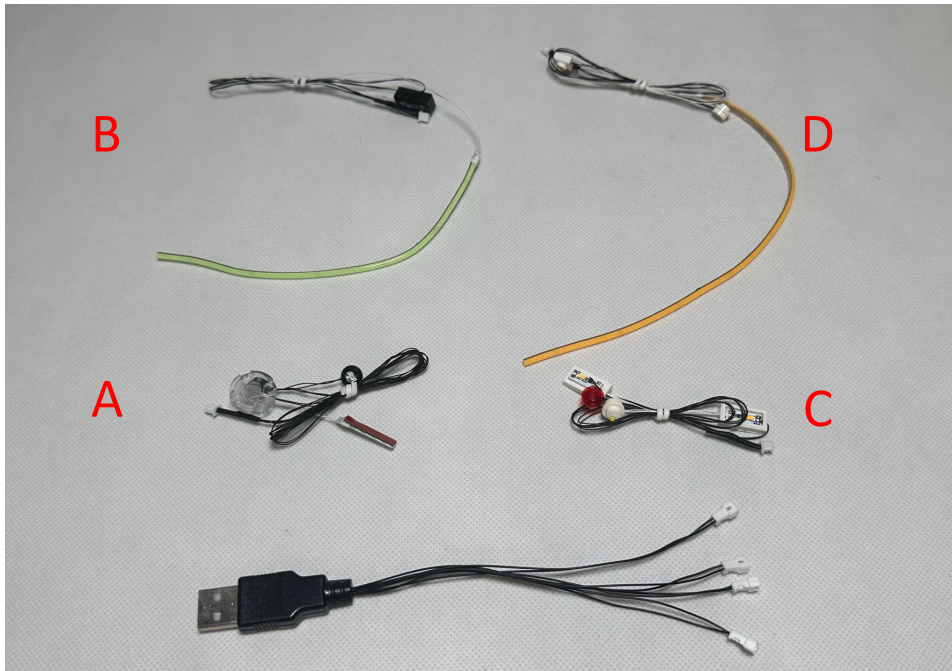


Take lighting part A to assemble it on the blue slide




Split the model as shown, then replace the black dishes at front by the lighting parts, then place the wire in between the studs on the base

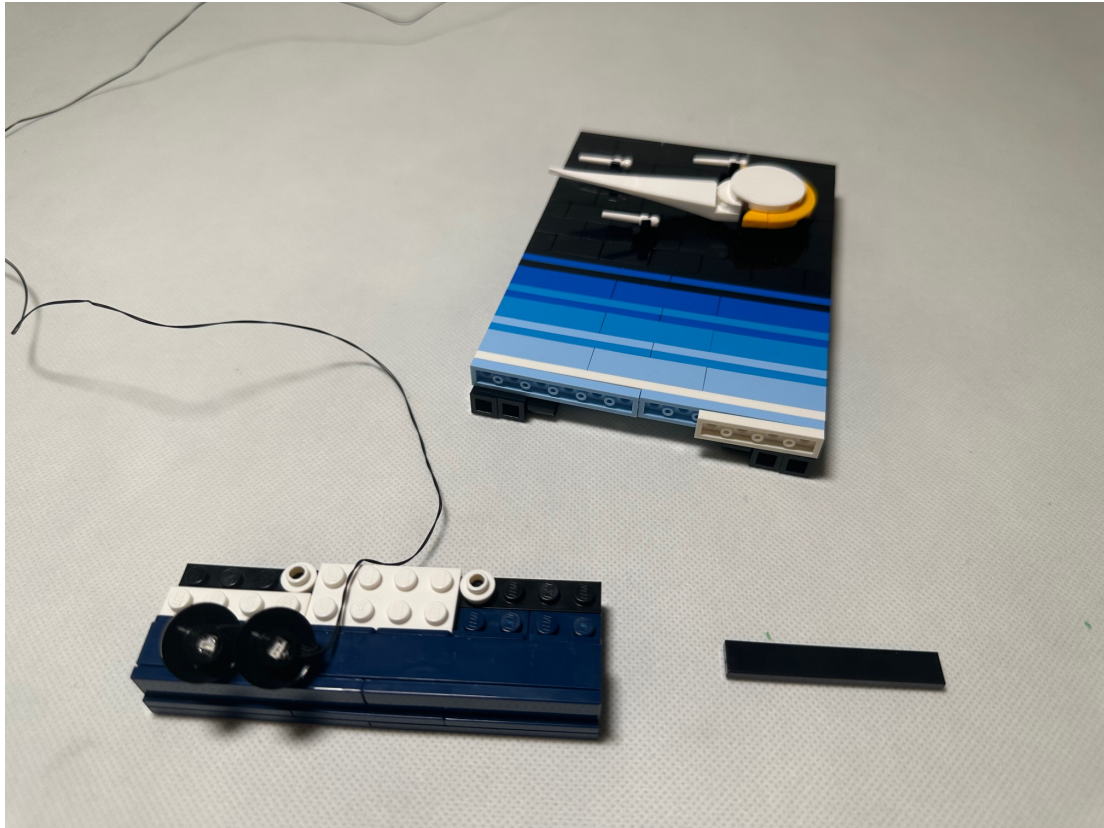


Restore the model, then remove the top part away

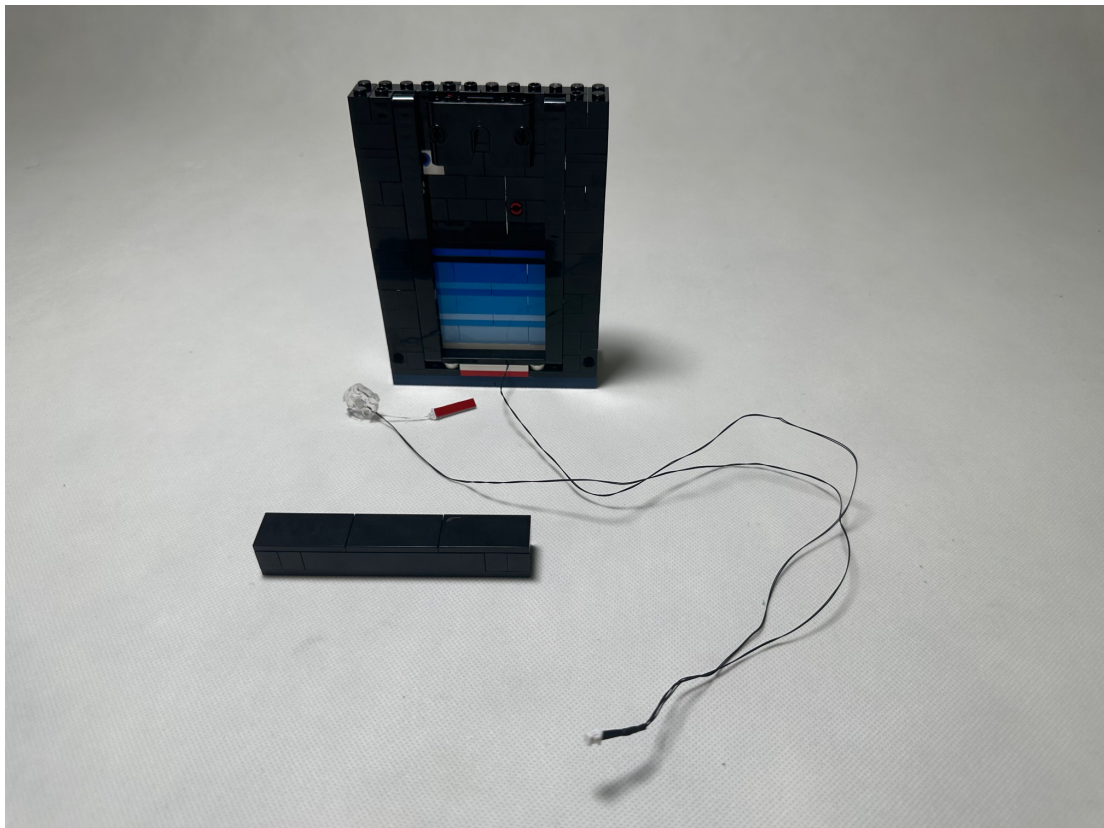


Then remove the shown parts at the front

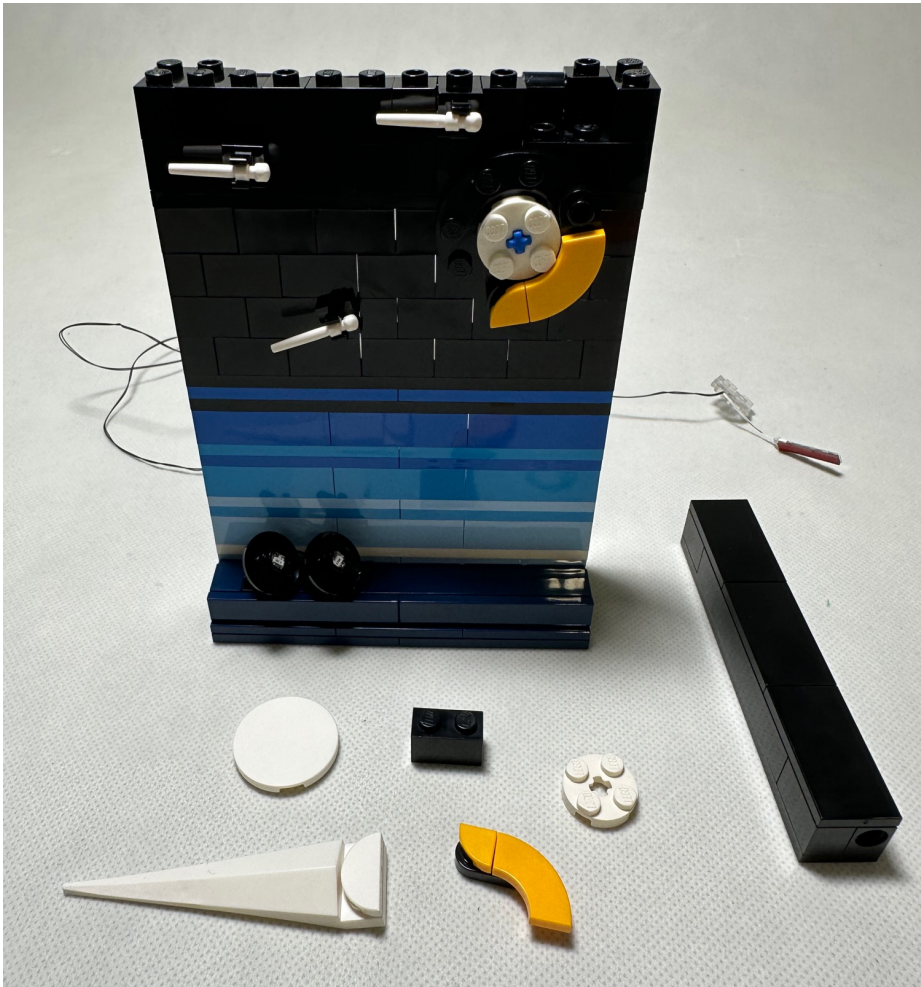


Get the remain lighting parts through to the front by the gap in between the bricks
Assemble the 2x2 lighting round plate to replace the white one and stick the led strip next to it

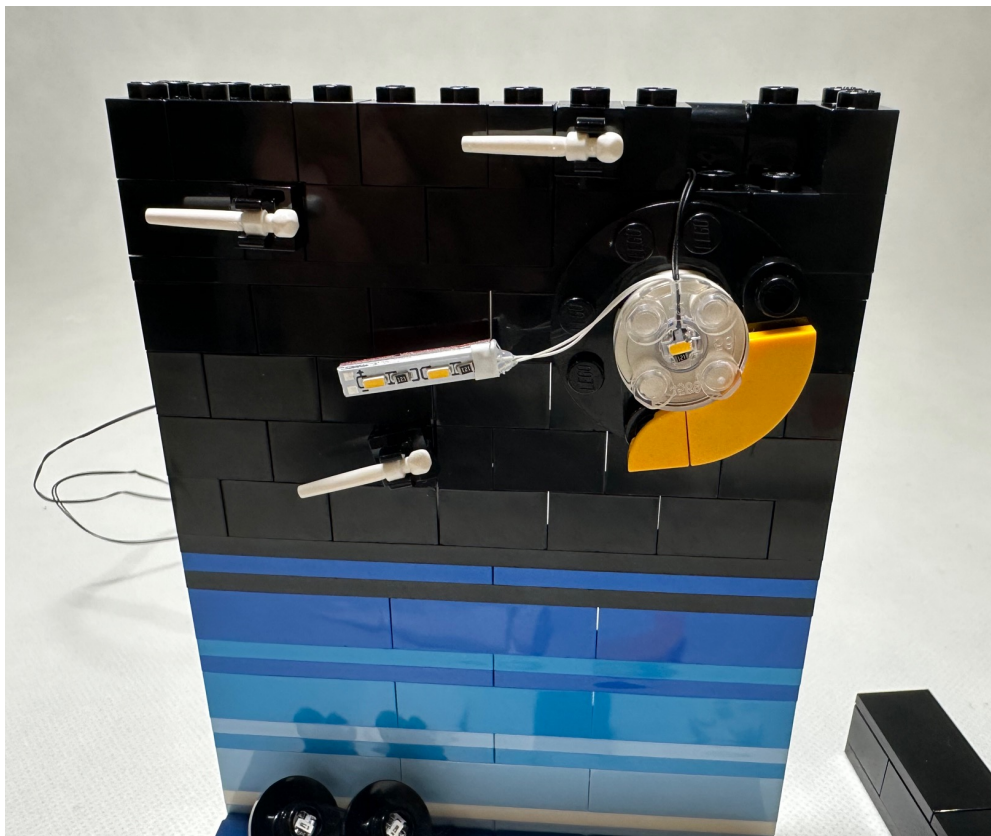


Restore the other parts, the white arrow should totally cover the led strip

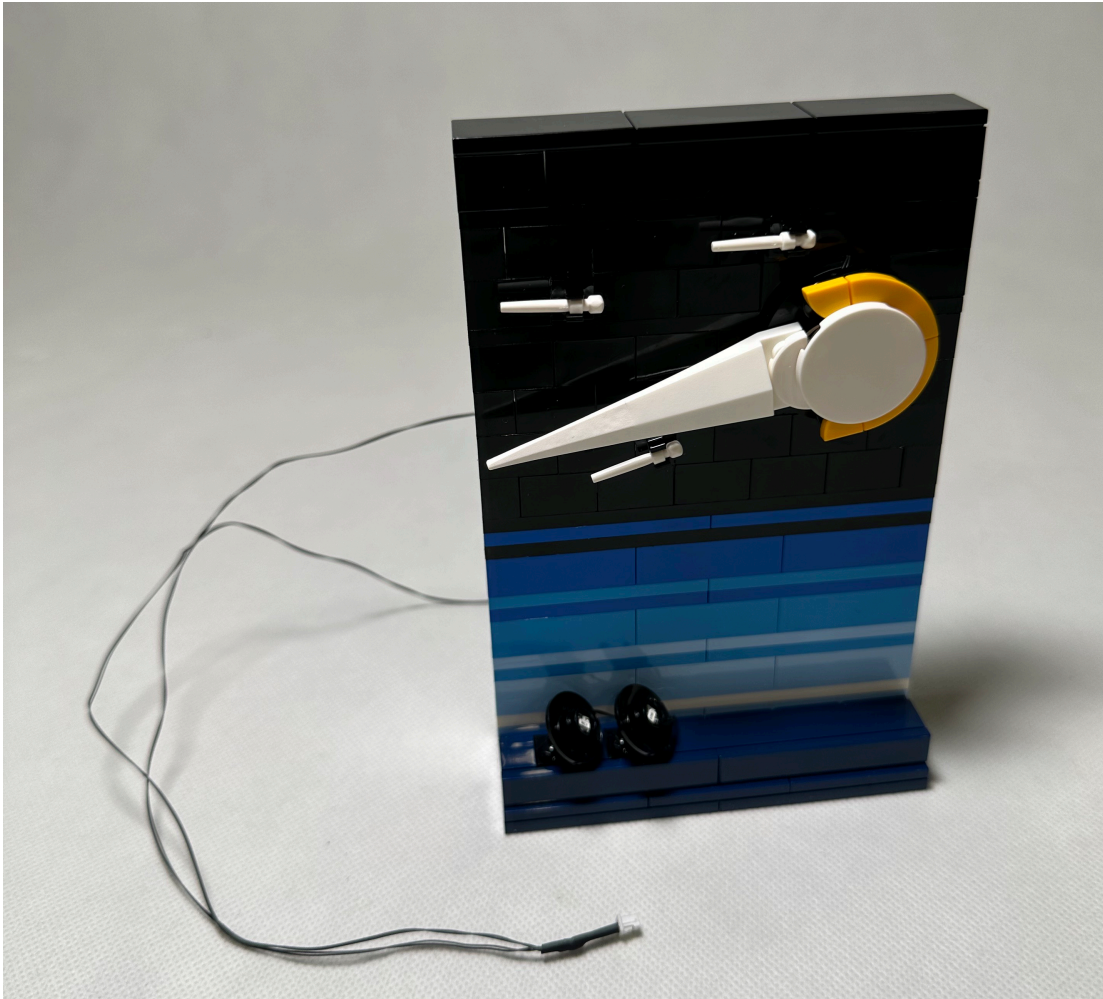


Take lighting part B for the green slide

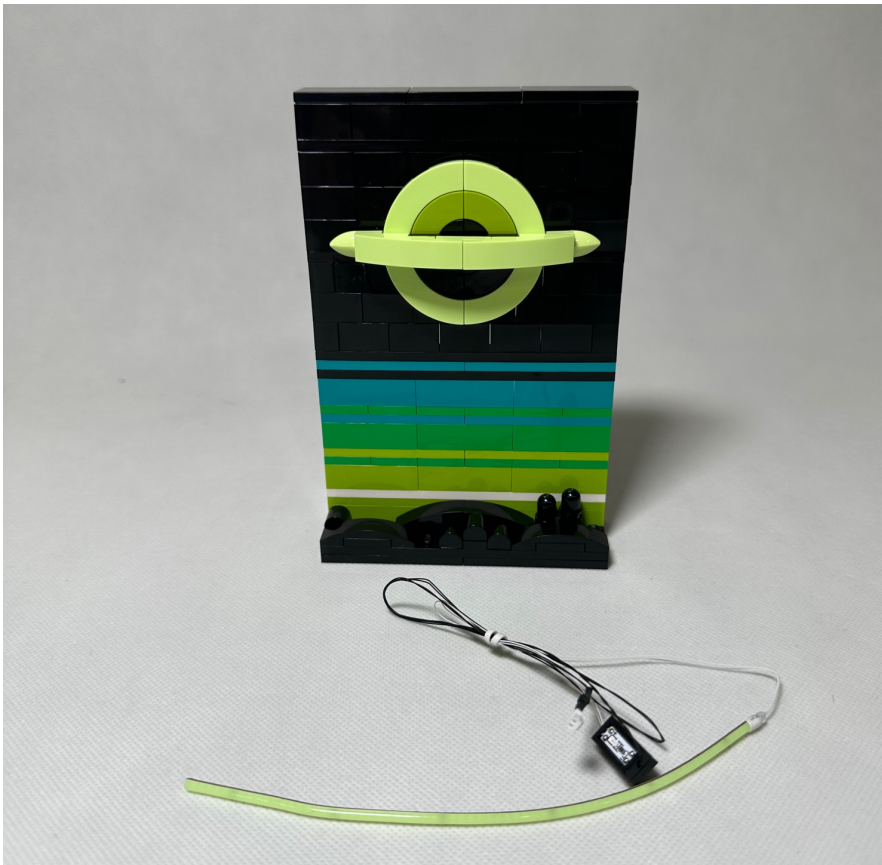


Split the slide, assemble the black lighting tile, then place the cable in between the studs on the base

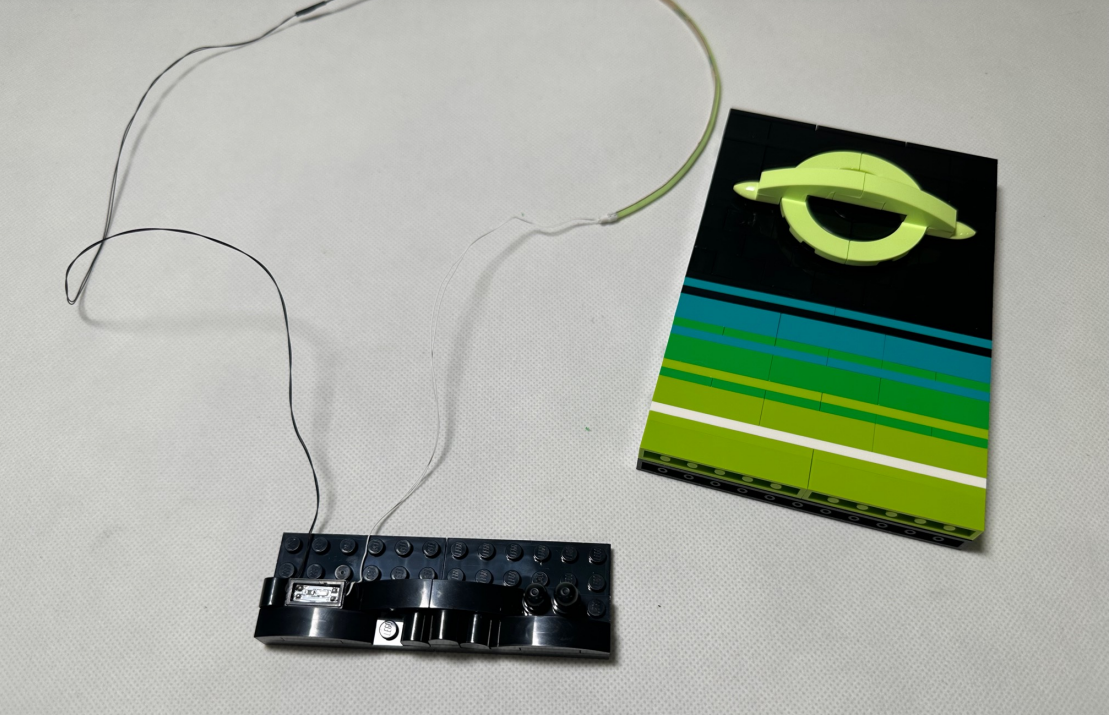


Then separate the slide on the back as shown, restore the bottom half back to the base

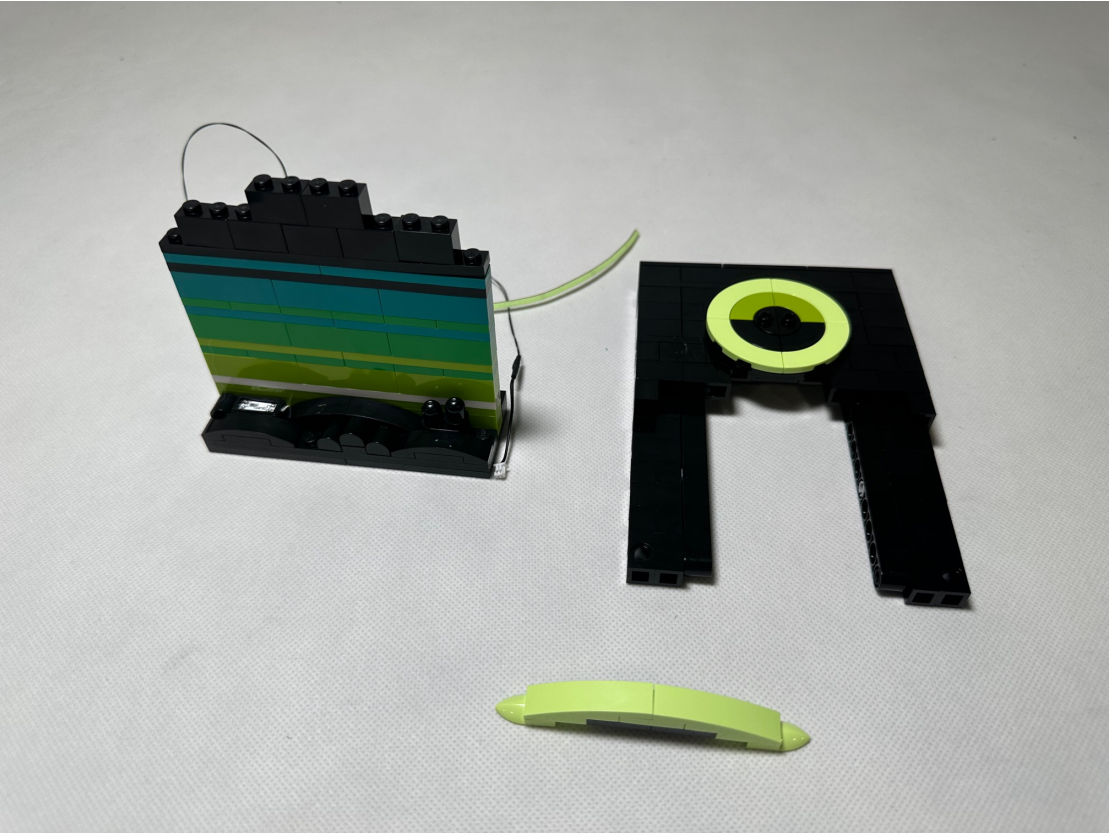


Move the long led strip to the front, place the wire in between the stud then restore the top half of the slide but don't close it tight yet

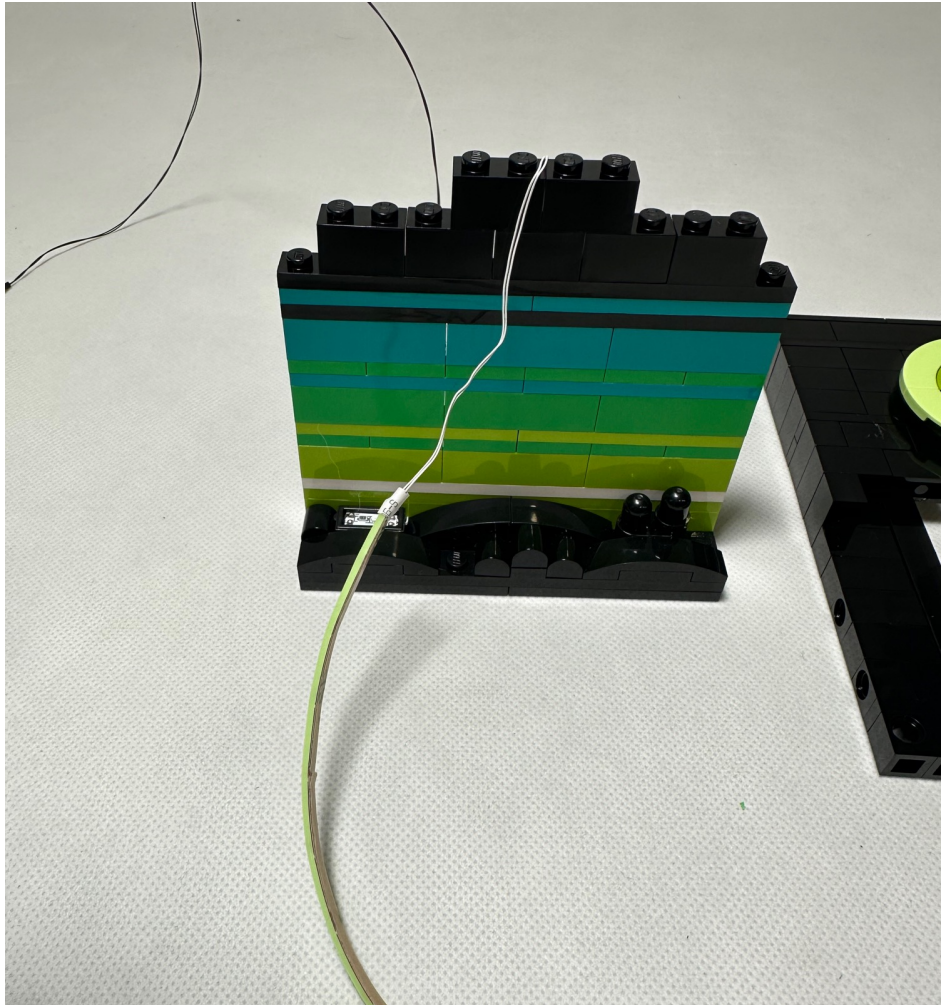

Stick the led around the circle, adjust the wire length then you may close it tight

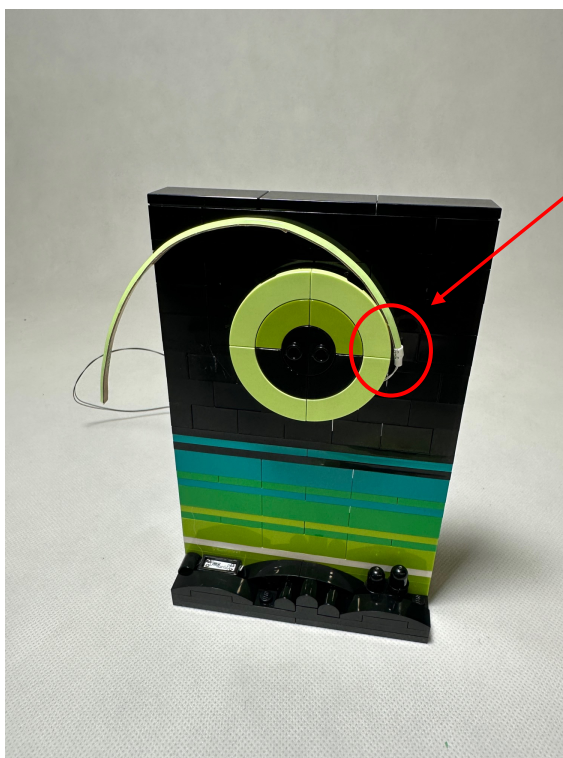


*Place the joint at the left or right side of the circle so it would be covered with the part is restored

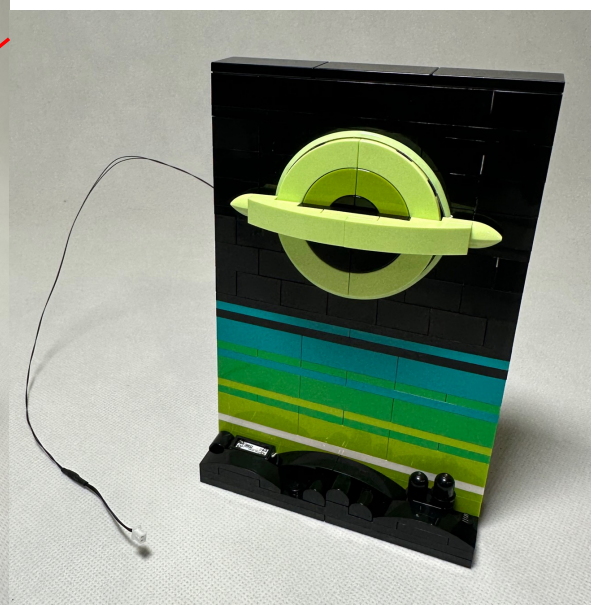

Take lighting part C for the pink slide



Separate the slide, stick the lighting tile with tape on the red circle place and the one without tape on the blue circle

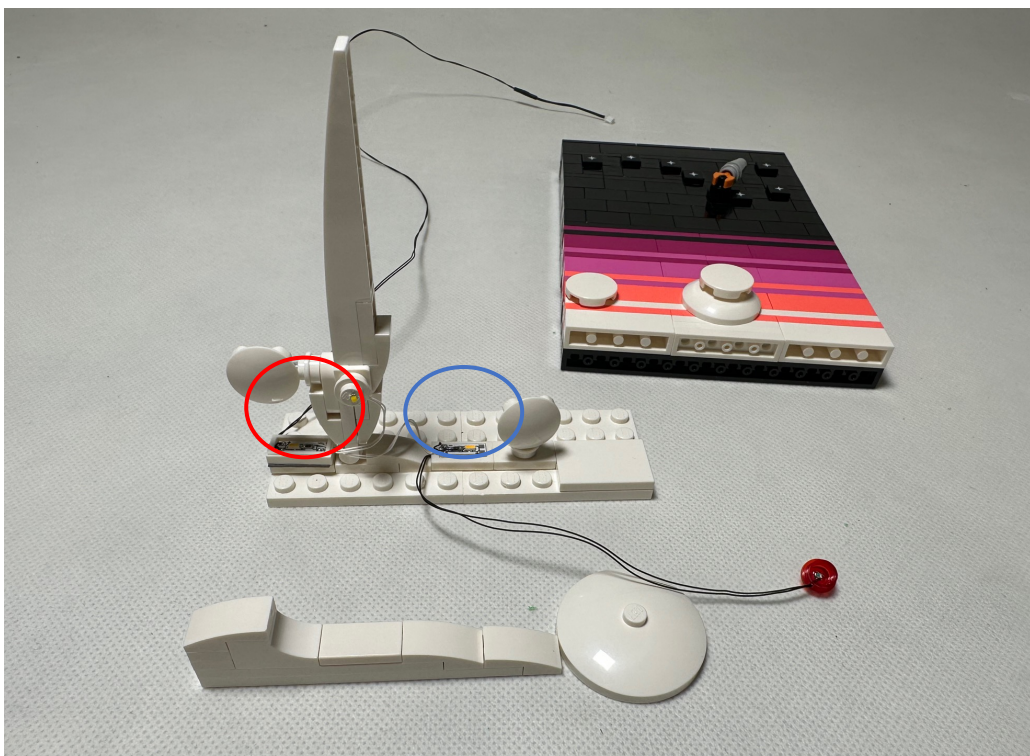

Put the slide back, assemble the white lighting round plate on the red circle and the red lighting round plate at blue circle to replace the round place on here




Restore all the removed parts and cover the wire to the red lighting round plate by the long white part



Now assemble lighting part D for the orange slide



Split the slide as shown

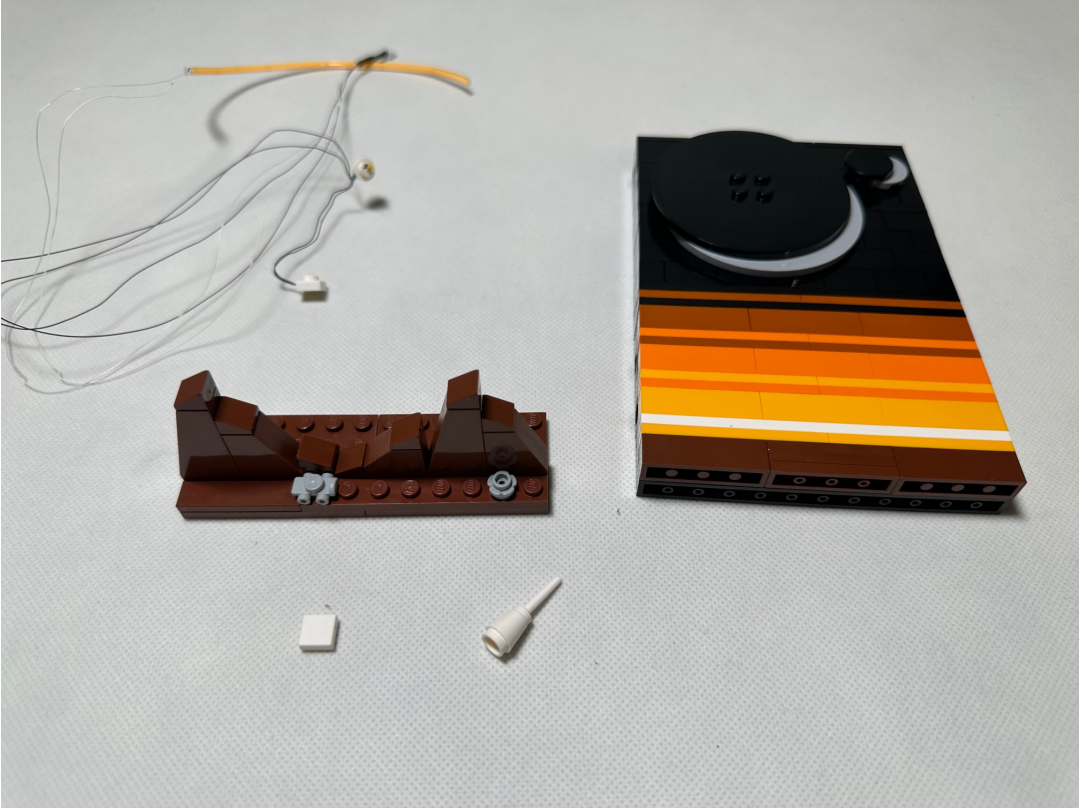

Assemble the lighting plate and round plate on the light grey parts




Then cover the lighting parts, move the remain part to the back, place the wire in between the studs



Restore the slide



Remove the top to leave a space to move the led strip to the front and again place the wire in between the studs to avoid it get damaged when putting the top back

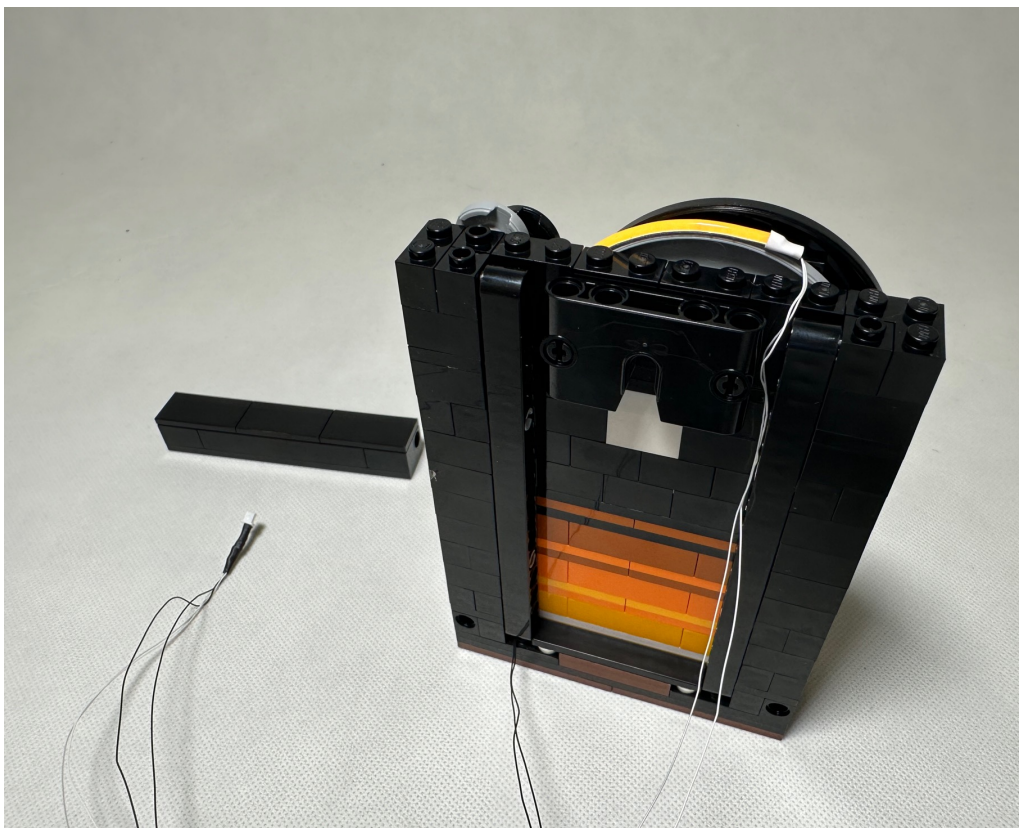

Stick the led only on the big grey round plate without covered by the black one (the joint between the wire and led could be hidden by the black circle)
Adjust the wire, then restore the top



At last, connect all the connectors with the USB cable then you may light them up

