


Lego 76417

Harry Potter

Gringotts Wizarding Bank

Installation Guide (Part A)



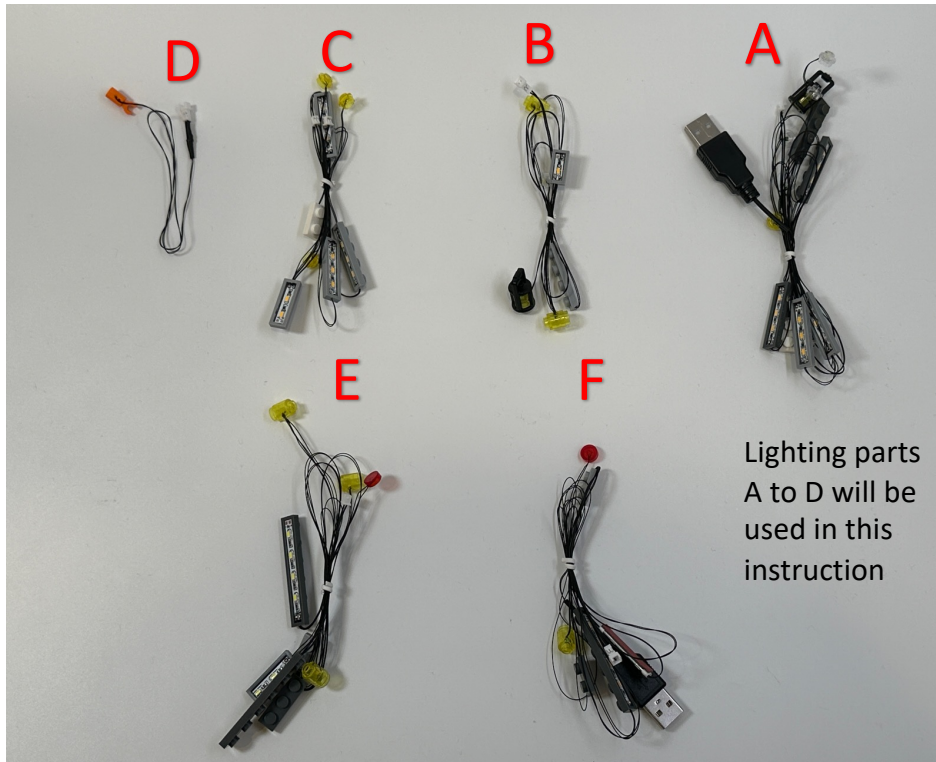

Start from splitting the top floor from the house




Assemble lighting part A starting from the ground floor



Take the lighting 1x4 plate which is next to the USB plug, assemble it into the ceiling of the red room



Remove some parts on the 2nd floor, then take the remain lights to the 2nd floor and wires could be hidden by the bricks

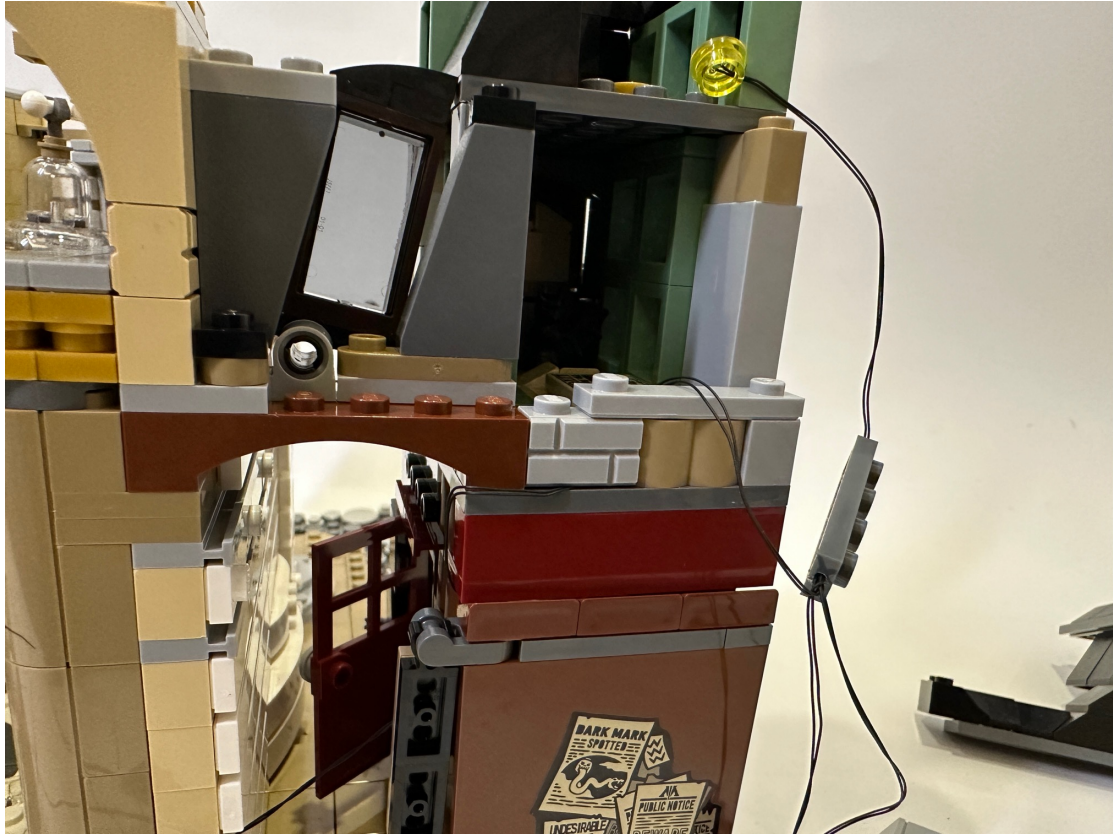


Assemble the 1x4 lighting plate with a yellow round plate attached as the light for 2nd floor




Then assemble the lighting round plate to the big tan round plate and close up the model



Leave the dark gray 1x4 lighting plate to assemble it at the top floor
The remain lights will be moved to the big hallway, place the wire in between the studs in the red circle

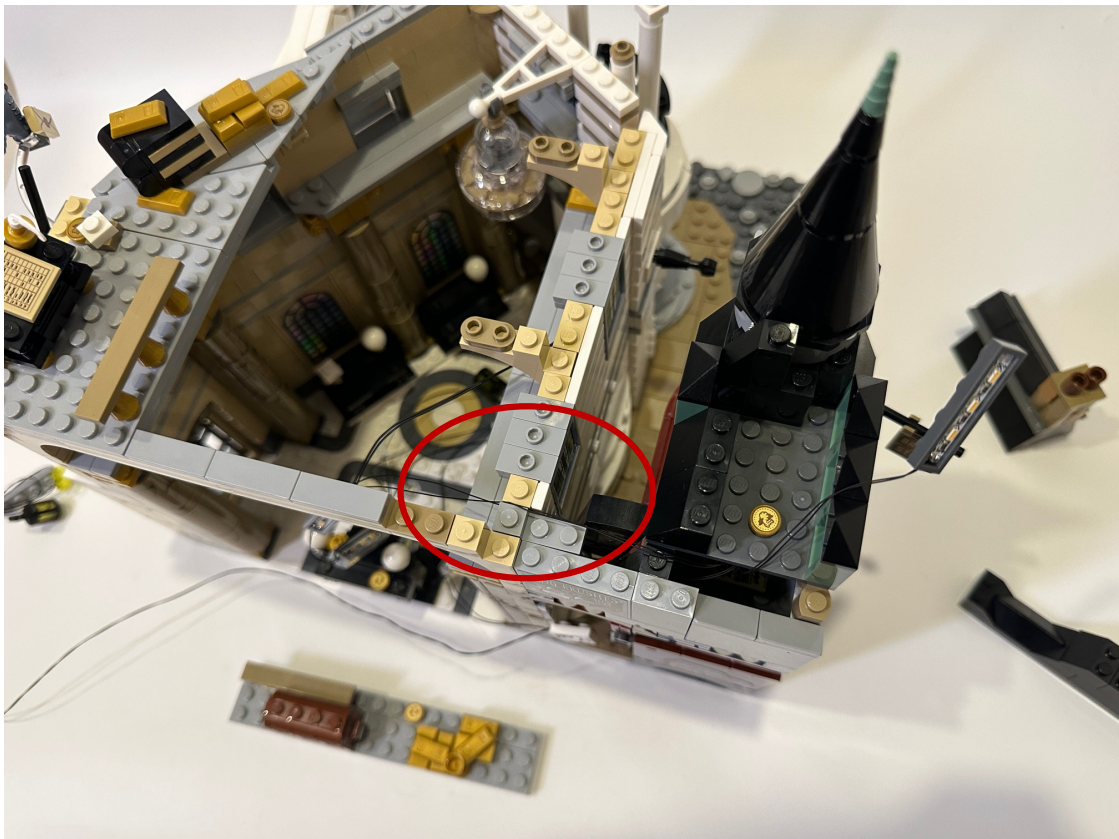


Assemble the last dark gray 1x4 lighting plate

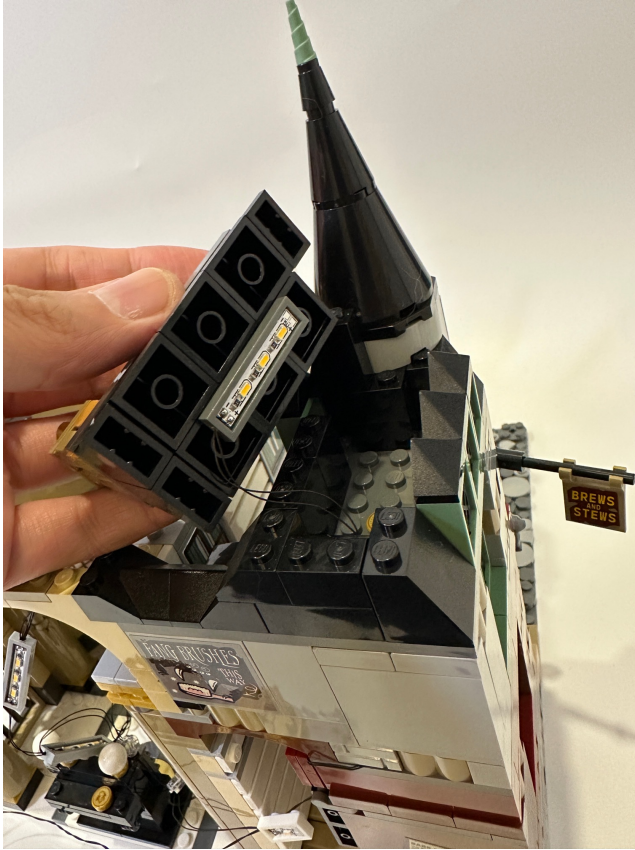

For the light grey 1x4 lighting plates, place them as shown and stable the wires by the dark tan 1x2 plates



Then put the platform back to combine with the lighting plates

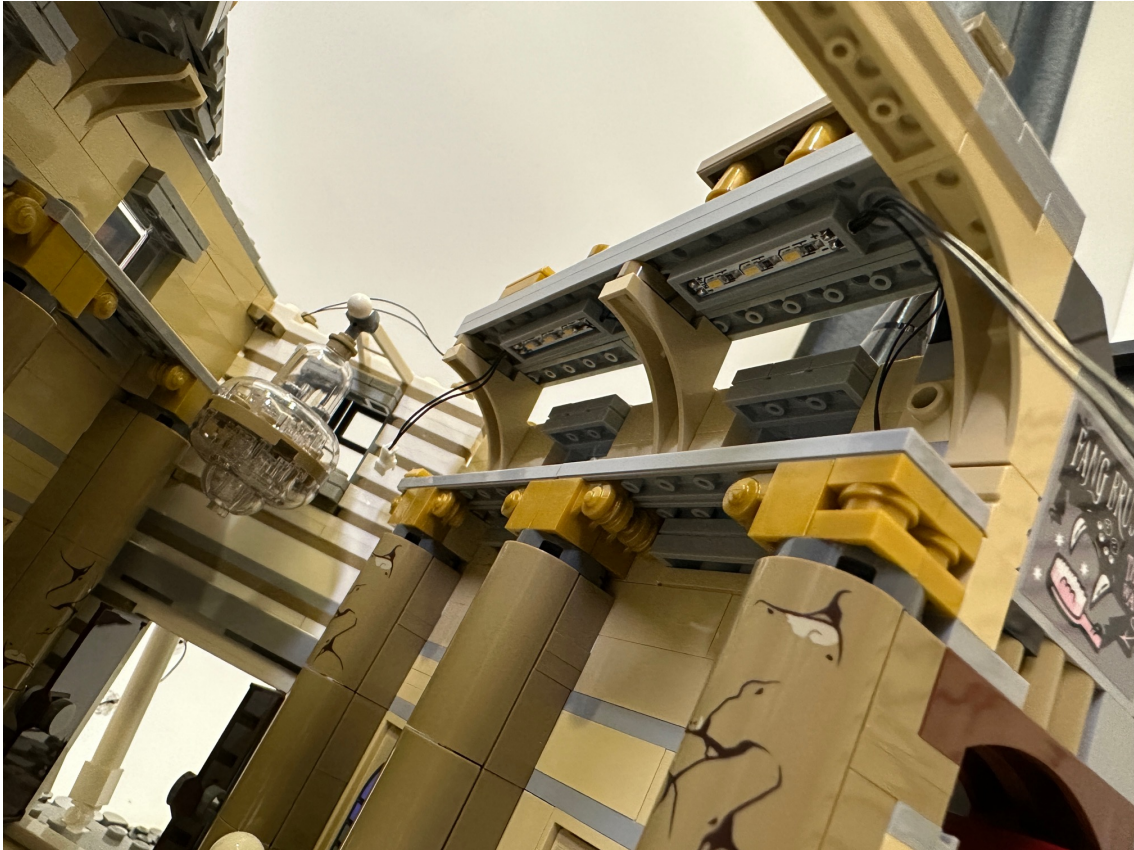


The lantern will be moved to outside to replace the one without light
The wires would be hidden behind the white plates on the wall




Switch to the front, there're two white 1x2 lighting plates, we will assemble the one at the end to the entrance, remove the parts as shown to make a path for the wire



Restore the parts, the wire would be hidden behind the shown white pole

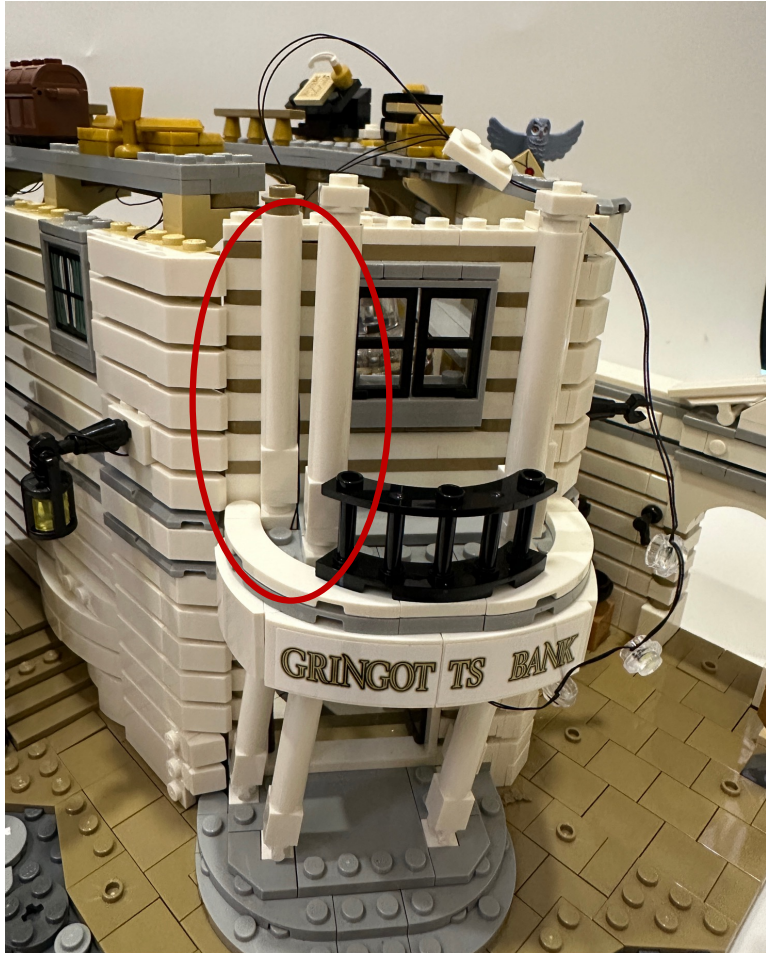


The clear lighting round plates at the end would be assembled to the big lamp
Open the cover and place the lighting round plates on the big dark tan round
plate then restore the cover

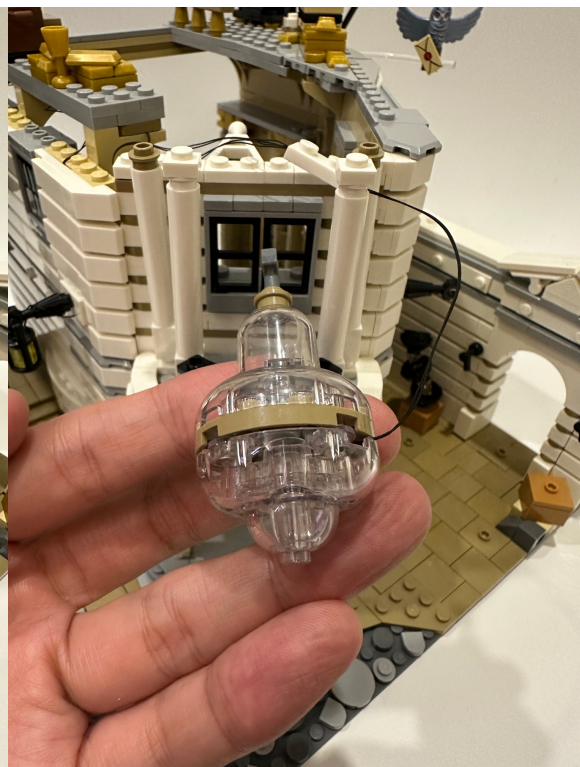


Leave the white 1x2 lighting plate until the top floor is restored



Turn to the back of the model and take lighting part B be ready

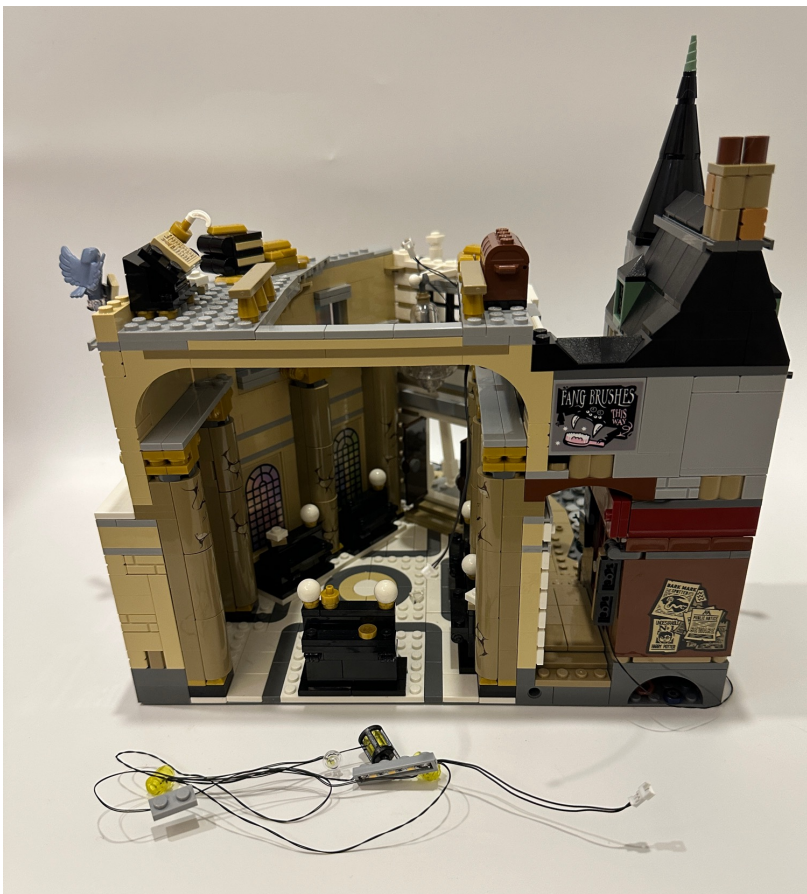

Remove the shown parts, connect the plug with lighting part A (red circle), then place the lighting 1x4 and 1x2 plate as shown (blue circle)

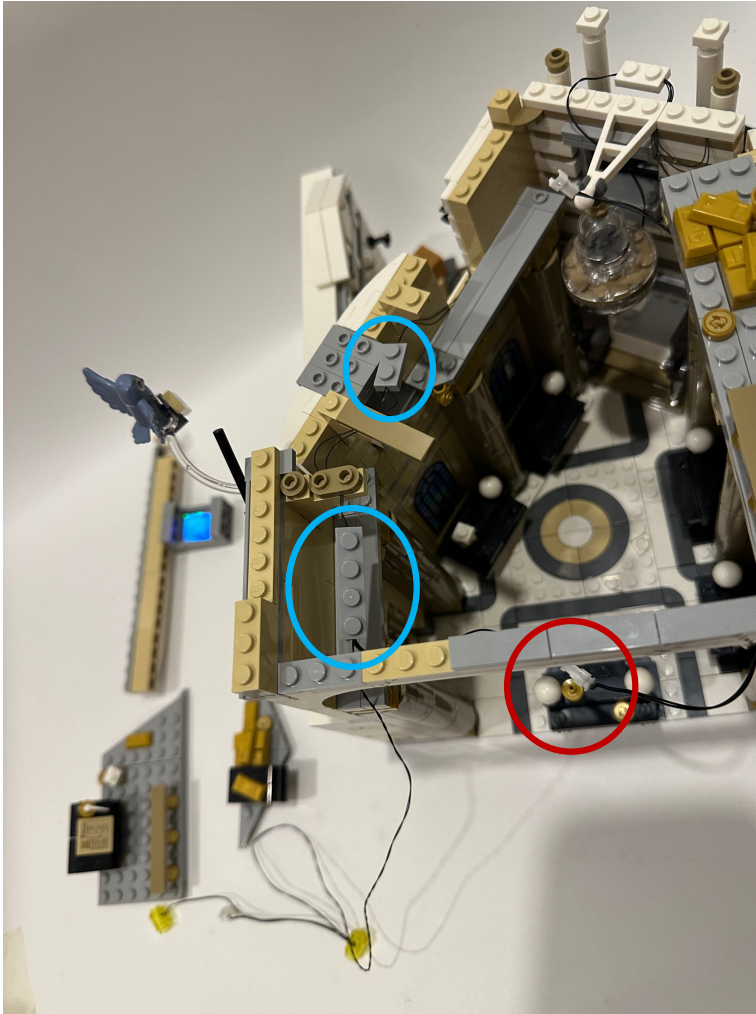


Then restore the platforms to get the lighting plates be installed



Remove the white parts on the wall, then move the lighting lantern to replace the one on the wall and restore the walls and window




The remain lighting parts will be moved to the side of the house

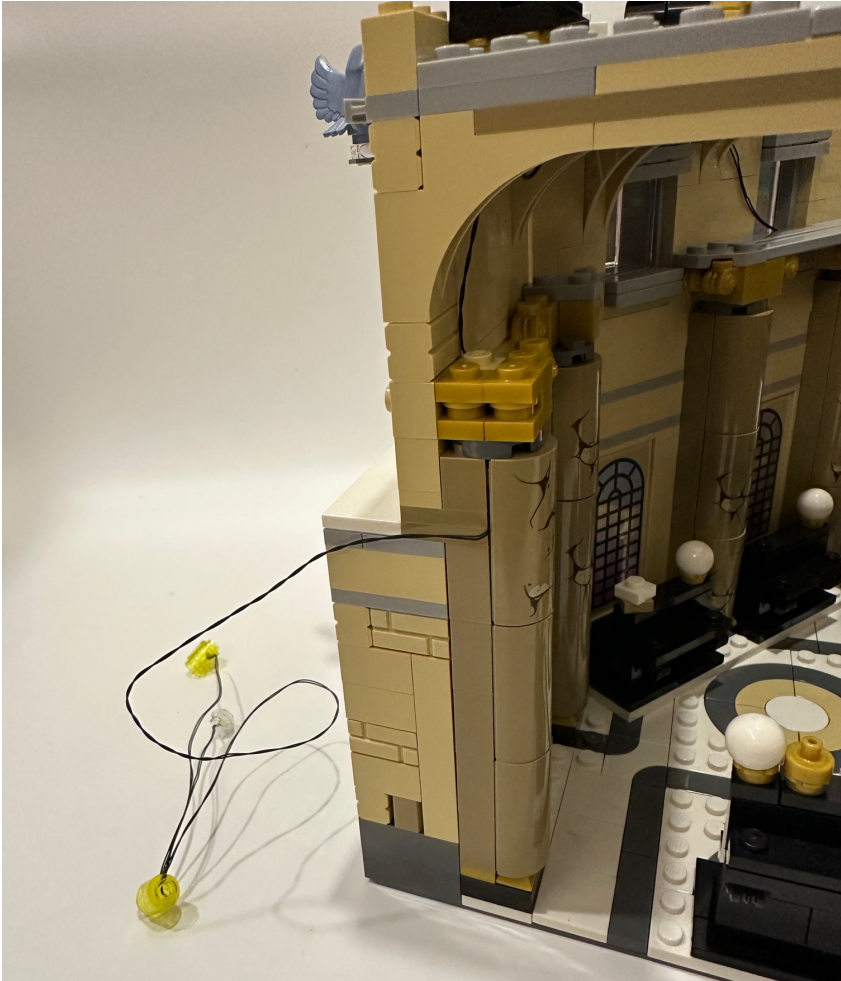

Hide the wire in between the wall and move the lights to the side door




Replace the lighting yellow round bricks and place the clear lighting round plate
Place the wire in between the round bricks at shown

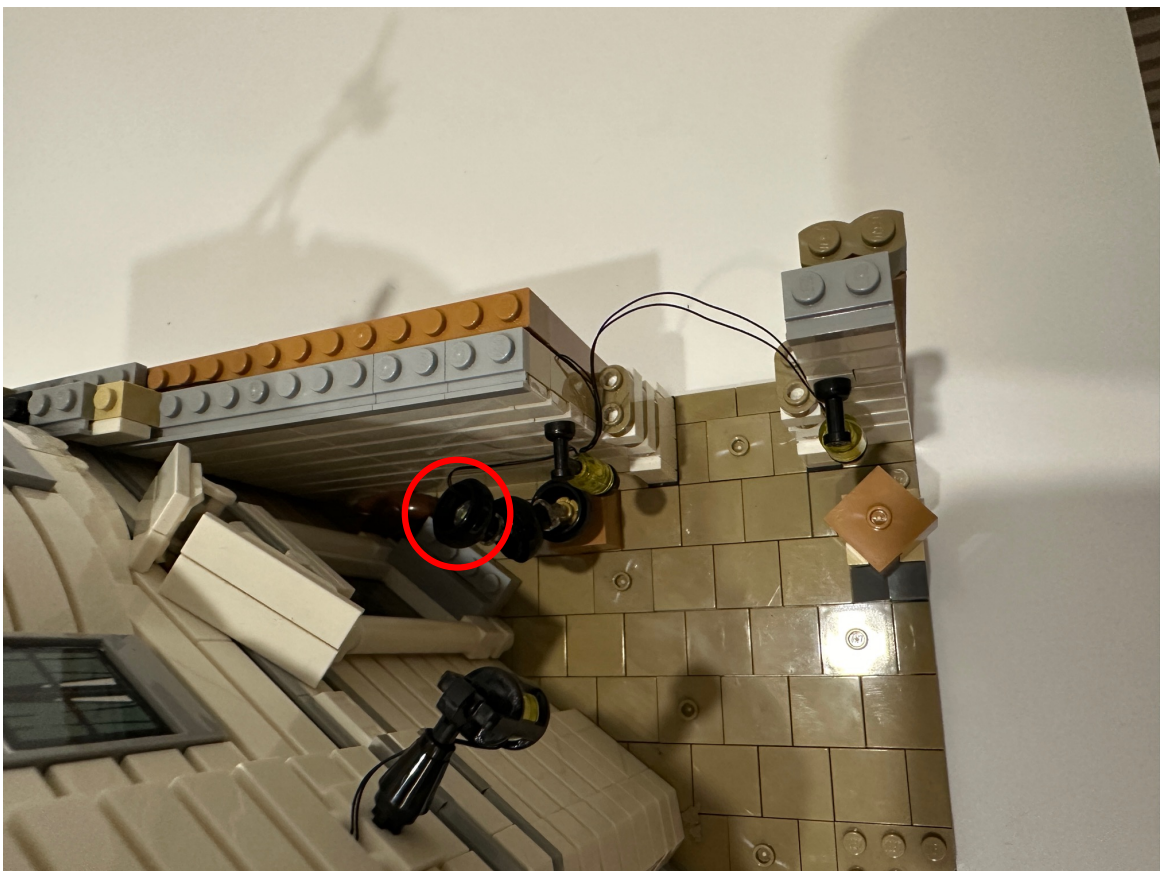


Then restore the white arch first to see does the wire fits in there
If ok then you can restore the whole wall




Take lighting part C to assemble to the top floor, split it as shown first

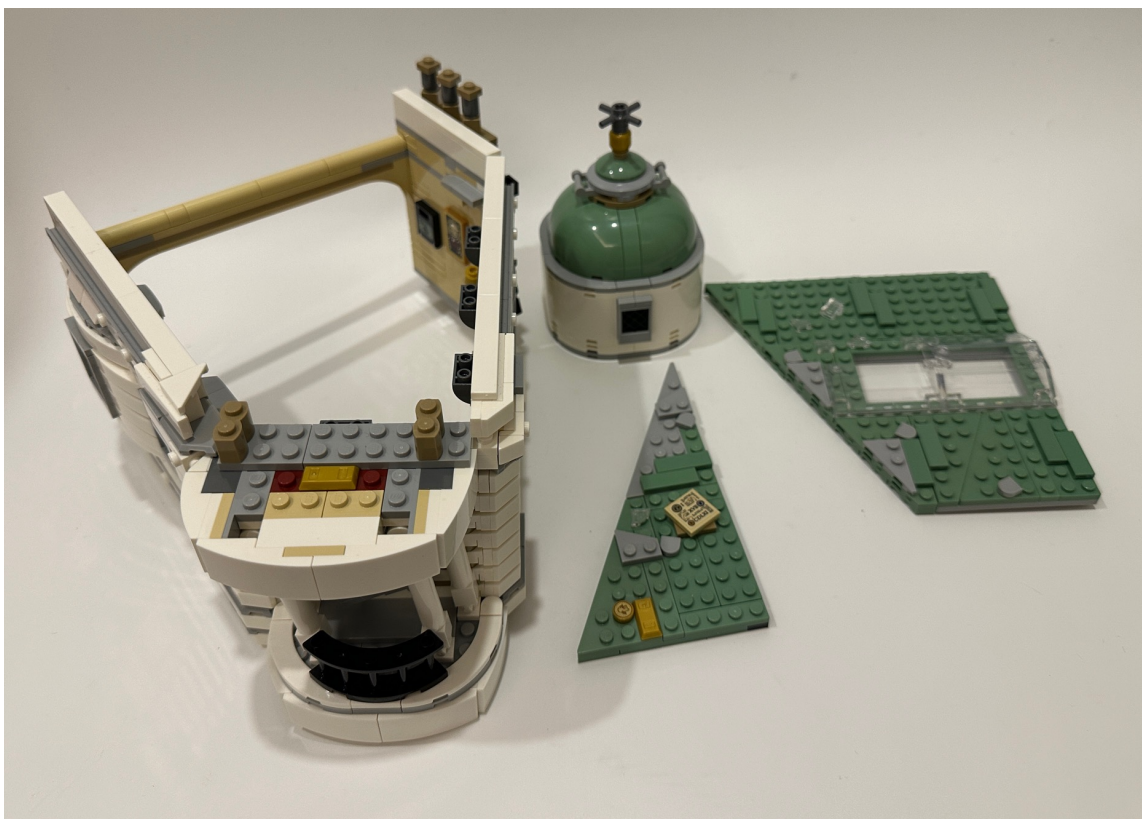

Start assembling from the white 1x2 lighting plate at the end, put it as the light for balcony, it could be just passed through the window

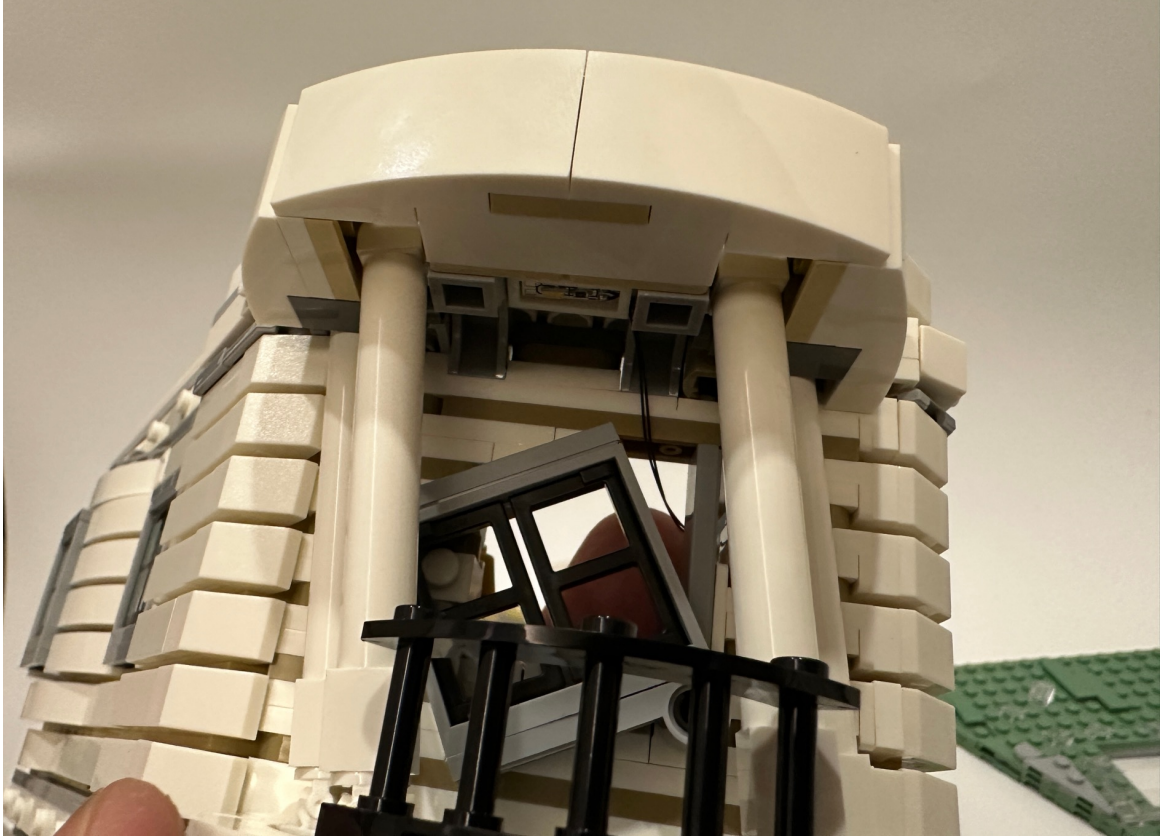


The 1x3 lighting plate and the connector will be moved to the top level, place them at the top and restore the smaller part of the roof (red circle)

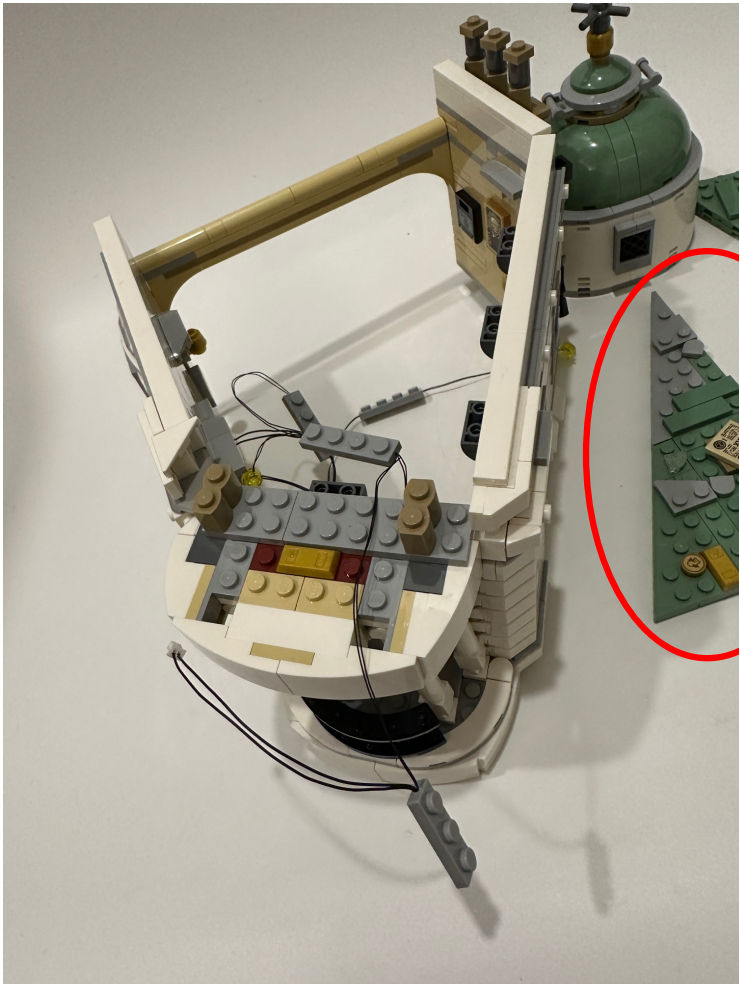

Assemble the 1x4 lighting plate and replace the yellow round plate by the lighting round plate next to the window




Then put the bigger roof back with the remain lights installed

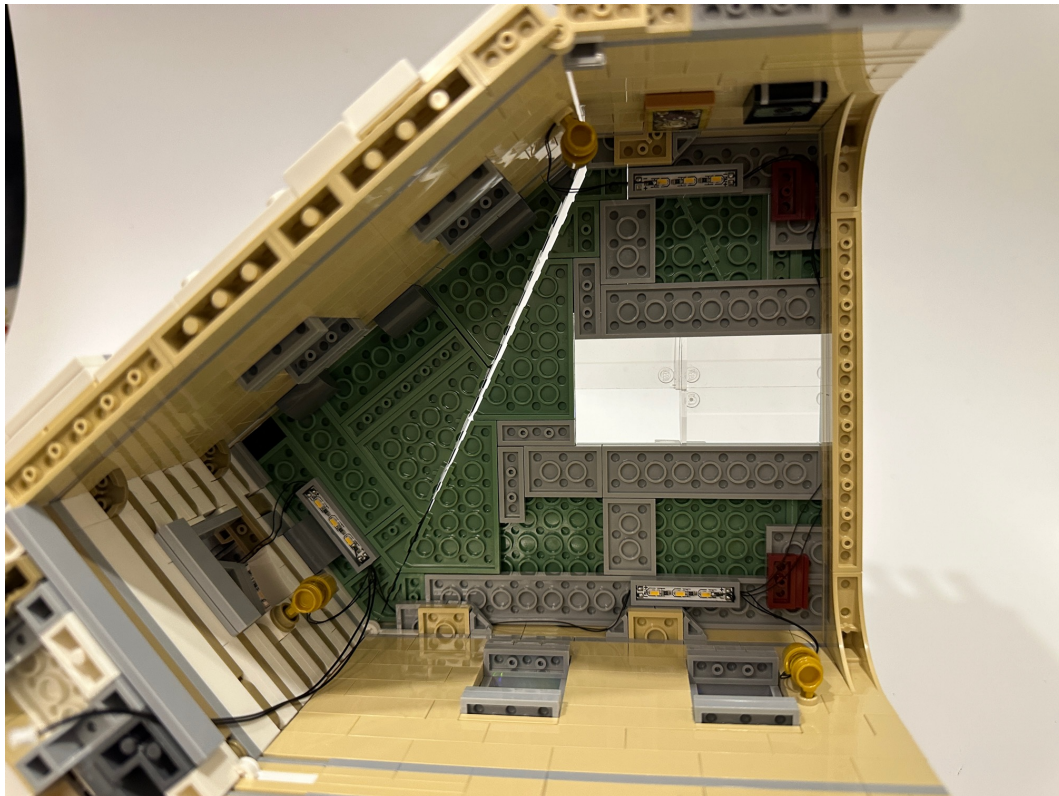


Now you can combine the house, connect the plugs and install the 1x2 lighting plate mentioned on page 10



Restore the room on the roof and assemble the 1x3 lighting plate

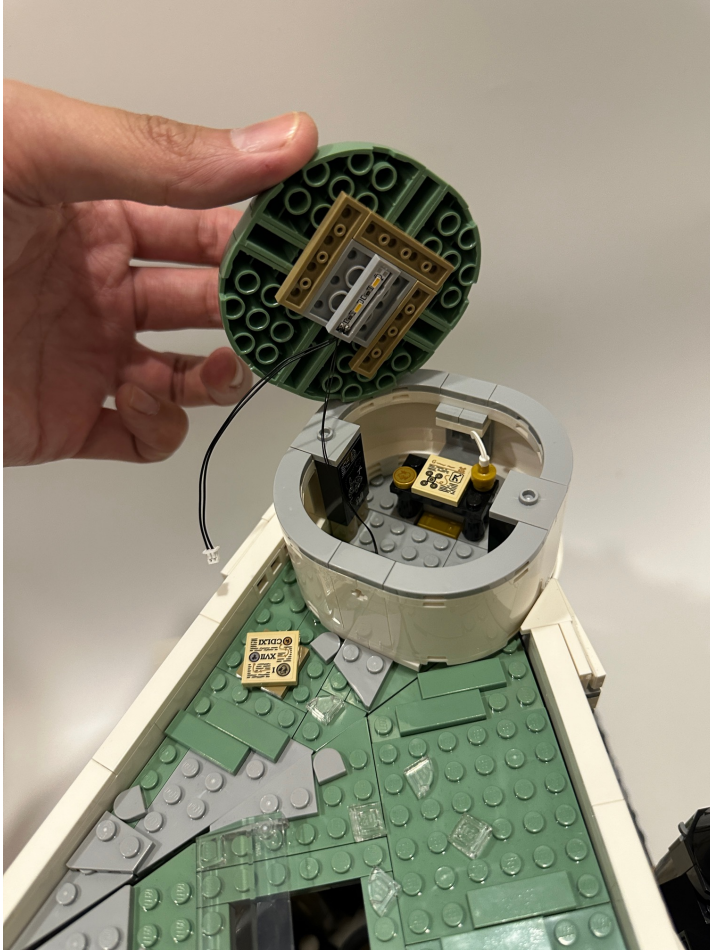


Take lighting part D to replace the orange part in the dragon's mouth

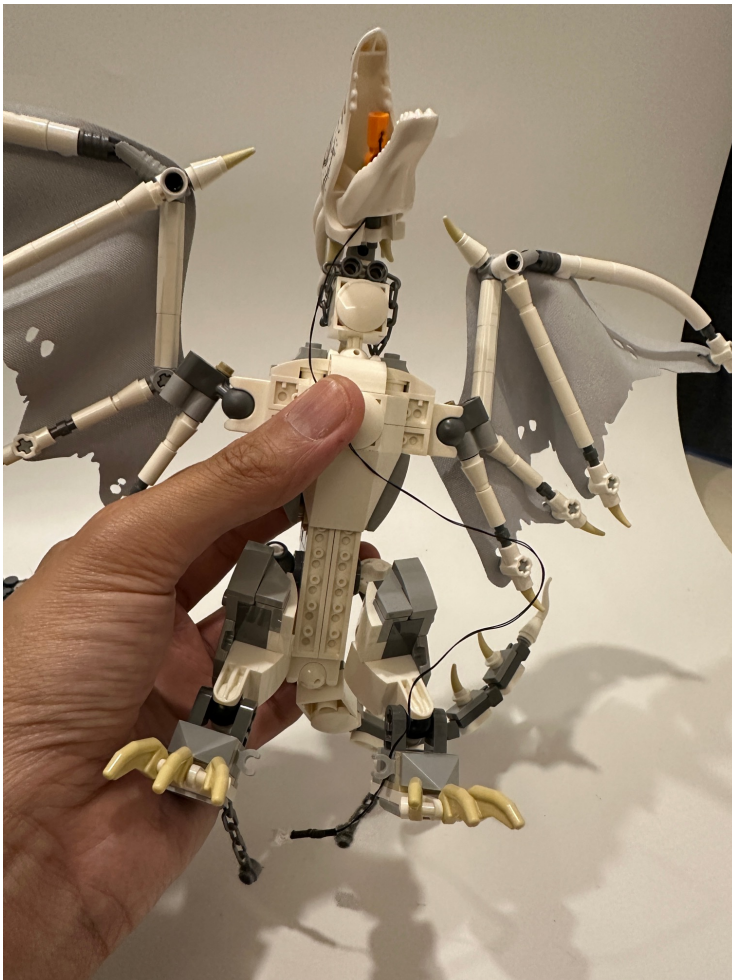

Hide the wire by the parts on the body, then place it on the roof and connect the plug



Restore the room on the roof and assemble the 1x3 lighting plate

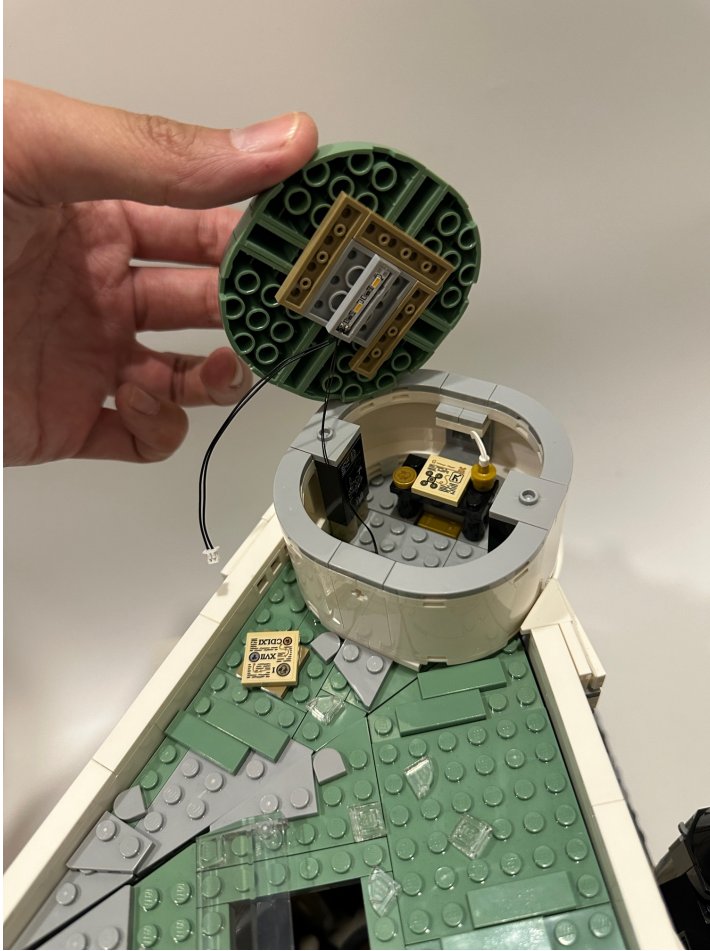

Then put the bigger roof back with the remain lights installed