
## Lego 10339

## Santa's Post Office

## Installation Guide






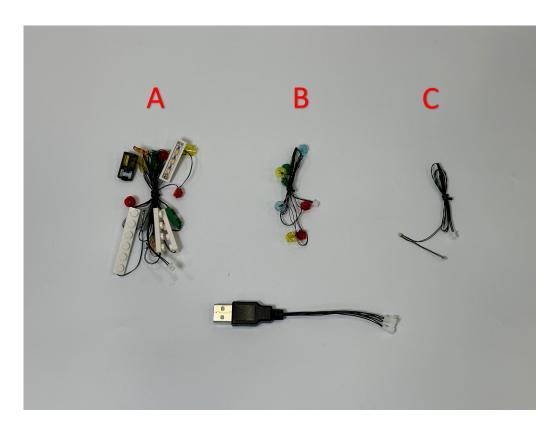

Assemble lighting part A to the house




Pick the lantern at the end of the lighting part, detach the shown part from the right end of the house

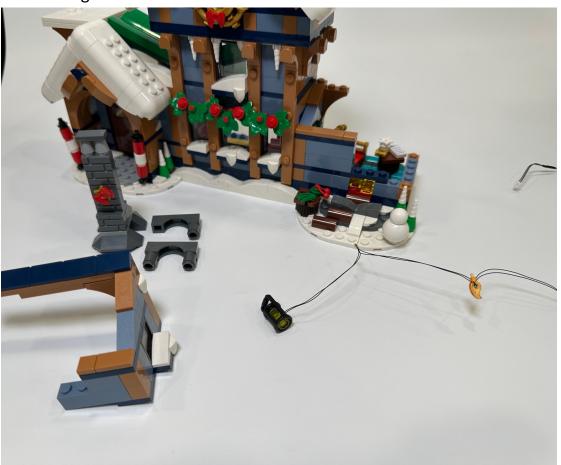


Remove further parts from the house to show the clear yellow slopes in the fire place, assemble the lighting lantern and the led bulb inside the slope



Assemble the lighting fire on the candle (red circle)
Restore the parts and the wire should be hidden under the parts restored

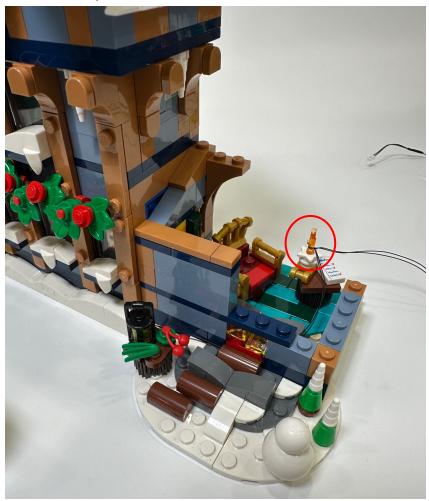

Pass the remain lighting parts except the white lighting plate through the wall

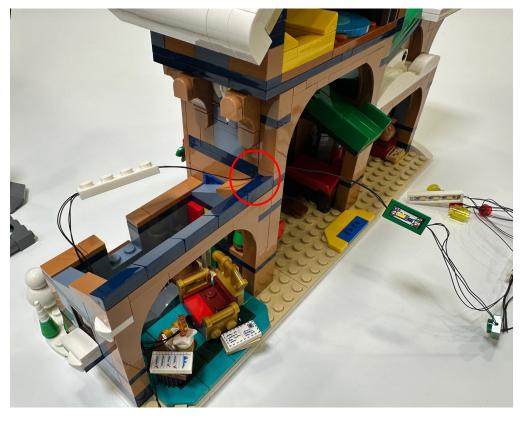

Put the roof back and assemble the lighting plate on it



Assemble the first green 1x2 lighting plate under the slide (red circle) then remove the shown parts to clean a path for assembling the remain lighting parts




Move the shown lighting parts to the upstairs



Carefully place the wire beside the orange plate and restore the floor, the wire must not on the studs otherwise it would be damaged



Remove the shown part from the wall and assemble the lighting fire

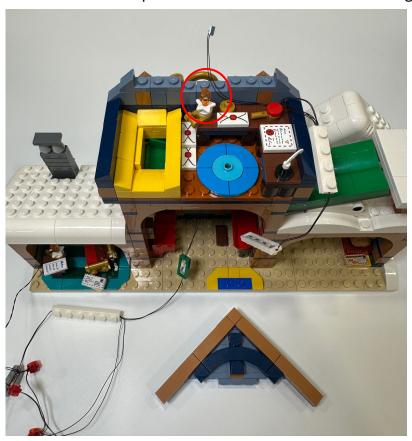

Stick the led plate at the shown spot, restore the wall and be careful the wire has to be placed in between the studs






Then assemble the remain white lighting plates on both sides of the roof




Back to downstairs, assemble the other 1x2 green lighting plate under the removed slide then put the slide back to the house



Remove the top from the left side of the house, take the remain lighting parts except the white lighting plate outside the house as shown

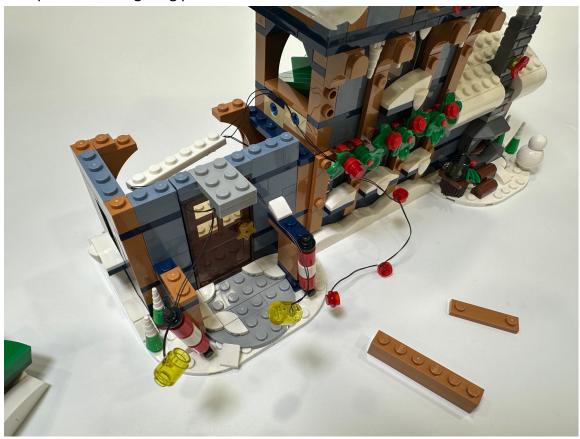


The 1x2 grey lighting plate would be assembled at the front door (red circle) The red lighting round plate would be assembled on the leaves (blue circle)

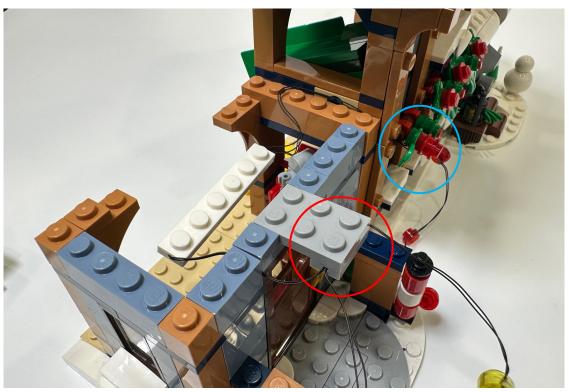

Once the wires are settled from the previous step, you may restore the top and assemble the lighting plate



Assemble the remain red lighting round plates, try to hide the wires behind

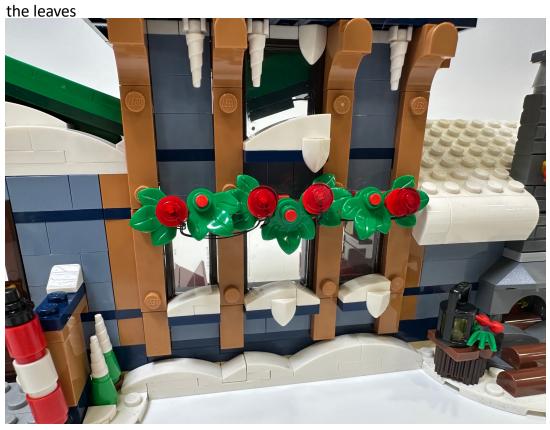

Replace the yellow round bricks at the front door by the lighting parts



Place the wires in between the arches and restore the front door parts




The lighting part A is now finished



Assemble lighting part B to the tree



Assemble the lighting round plates at the fours sides of the tree at bottom

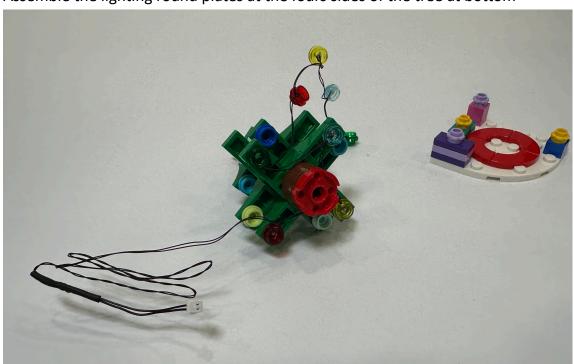


Then assemble the remain plates to the upper level







Assemble lighting part C to the balloon, detach the balloon as shown

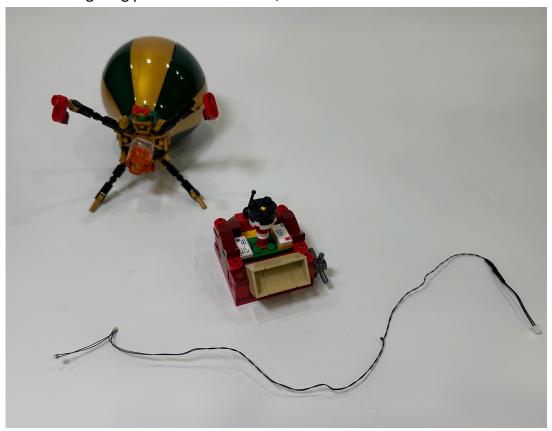

Place the lighting bulbs inside the orange 2x2 round brick

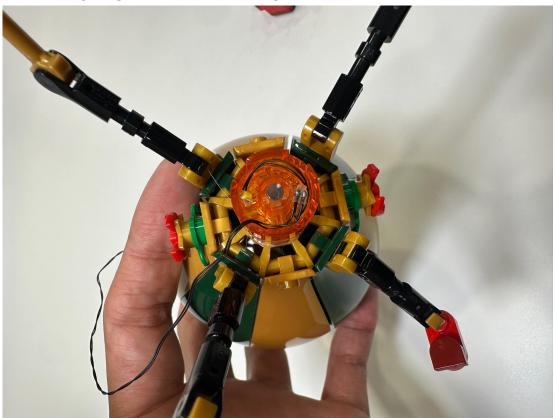

Place the wire out from the back of the balloon then it's done

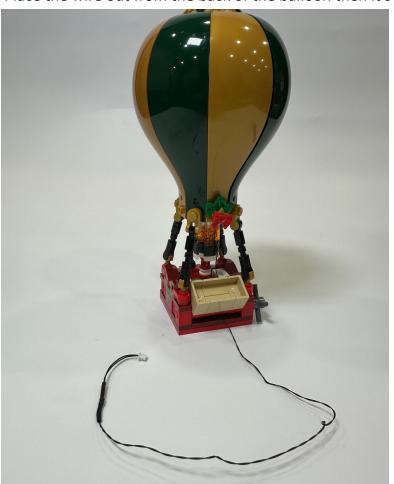

At last, connect all three connectors to the USB cable then you can light it up

