
Lego 42172

McLaren P1

Installation Guide





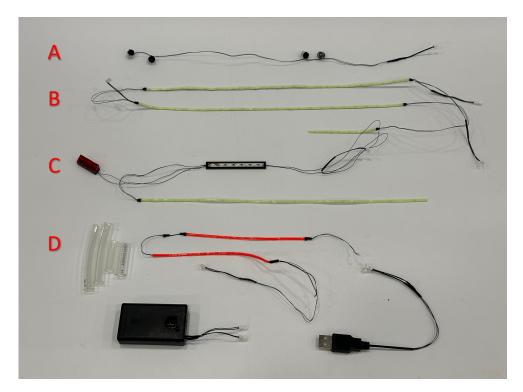

Take lighting parts A to assemble on the headlight
Take away the black round plates and clear tiles from the model, place the clear round
tiles on the lighting parts then assemble the end side to the right headlight as shown




Assemble the lighting parts and hide the wire under the black round plates



Then restore the left headlight




Move the connector to the bottom of the car by getting through the gap of the front bumper (blue circle), then stick lighting part B to the bottom of the car. Find the end with 2 connectors attached to stick on and connect one of the plug with lighting part A (red circle)

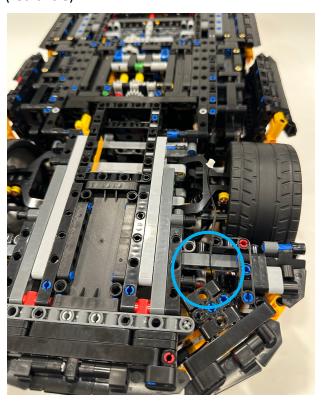





Stabilize the connected plugs at the rack and place the other connector back into the car by the hole shown in red circle

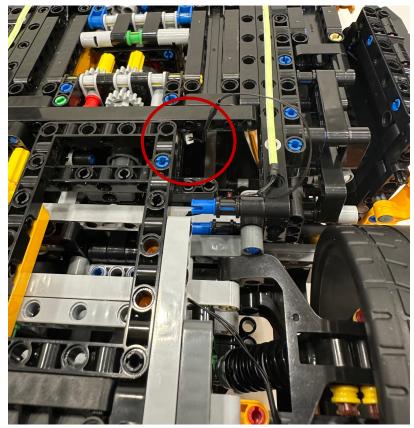


Stick the other long led strip and place the short one to the front bumper

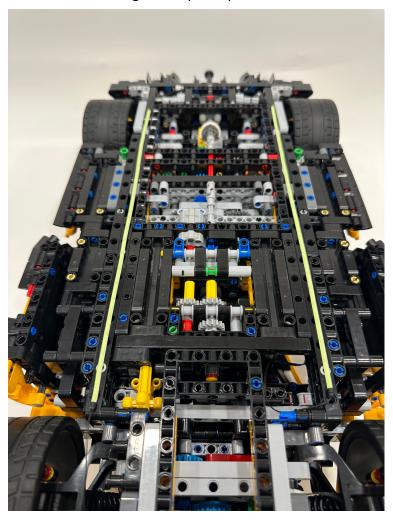


Remove the part in red circle, stick the short led strip above the bumper as shown then restore the bumper

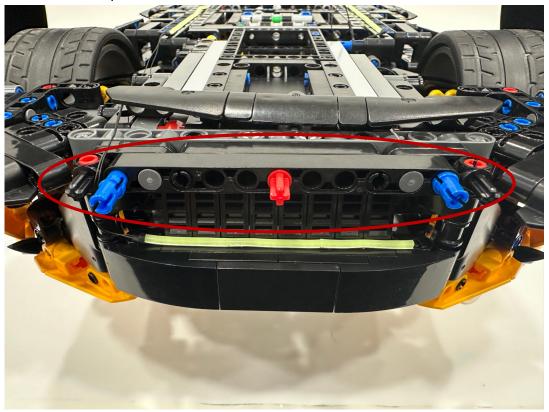

Take the shown parts of lighting part C to assemble them inside the car

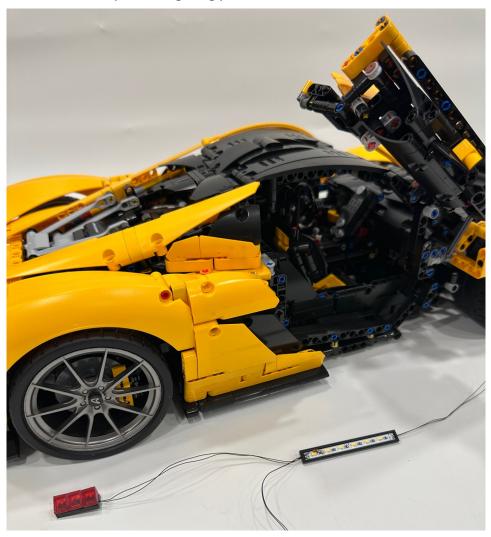

Stick the lighting tile, watch the direction the wire with connector should be facing the copolit seat and get the wire back to the seat to place the plug close to the bottom (red circle)

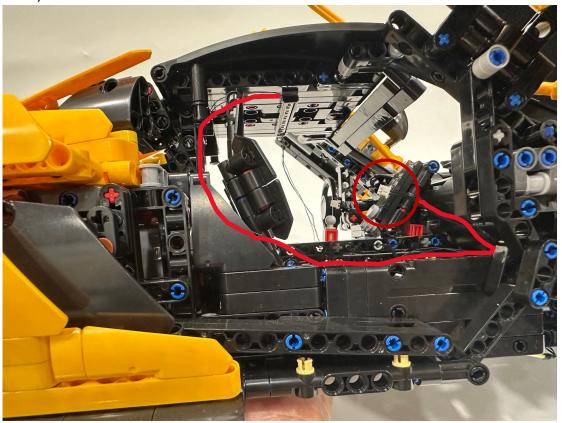

Replace the brake light by the lighting part




Stick the led strip to the rear side as shown







Now assemble the lighting part D to the red bar as the brake lights

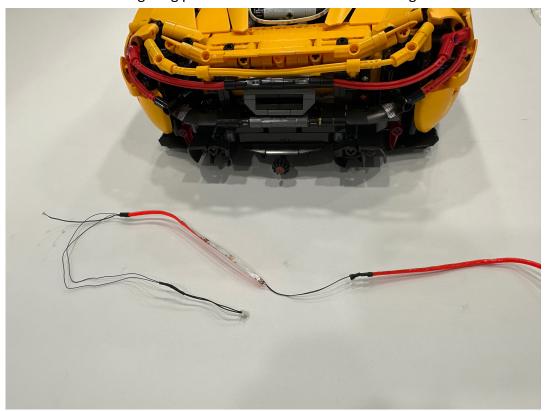


You need to use the clear tube we provided to tie the led strip and red bar together Take the side of the led strip with plug attached and combine with the longer tube as shown

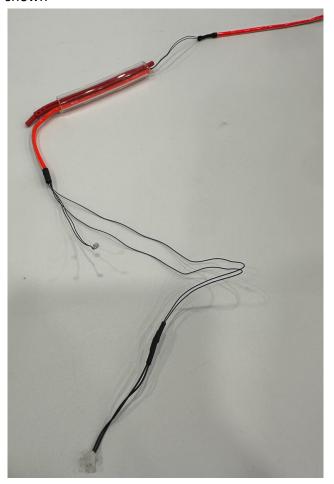

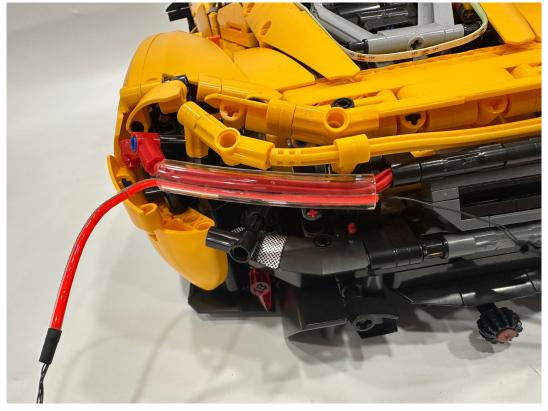



Cross the led strip to the other side and do the same procedure Hide the wire under the black bar shown in the red circle

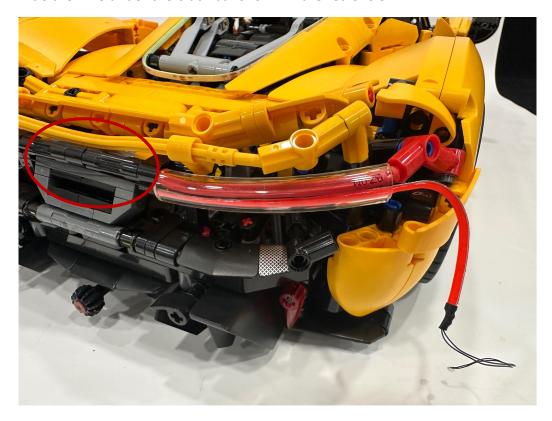


Then assemble the led strip with the tube by the same way as the other side




The led bulbs leftover would be placed inside the clear red parts



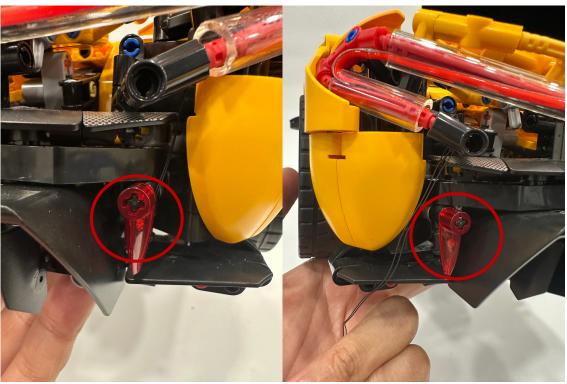

Move the connector to the bottom of the car

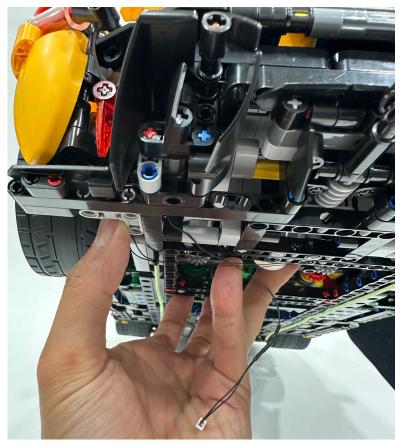

Then connect the plugs with lighting part B



To power up the lighting kits, you may connect by the USB cable or use the battery If you connect with the battery case you may place the car onto the seat

